

Designed with professional-grade performance and seamless contours, the wall-mount Tempest II gives you serious cooking power, with 650-CFM or 1,200-CFM blower options. Equipped with dishwasher-safe, high-airflow

pro baffle filters, an optional wireless remote control, 6-speeds, and dual-level halogen lighting, it's everything the demanding cook could ask for.

ZEPHYR


ZEPHYRONLINE.COM

ACT™


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Single Blower (Included) Min. - Max. CFM	200 - 650	200 - 390	200 - 290
Single Blower (Included) Min. - Max. Sones	1 - 6	1 - 4	1 - 3
Dual Blower (Optional) Min. - Max. CFM	400 - 1,200	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	
Dual Blower (Optional) Min. - Max. Sones	3.5 - 9		




Optional Wireless Remote Control

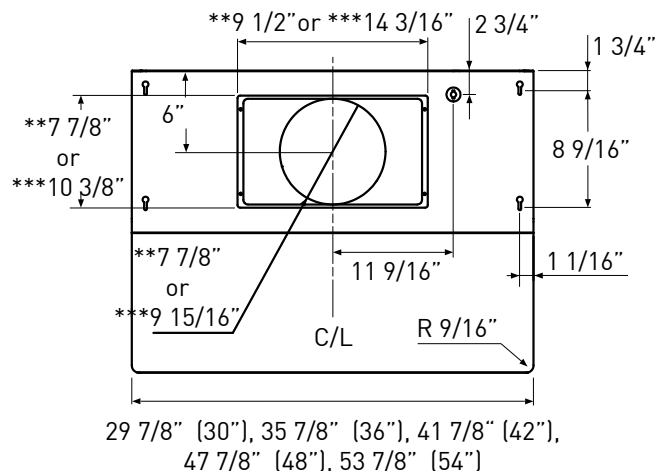

TOP

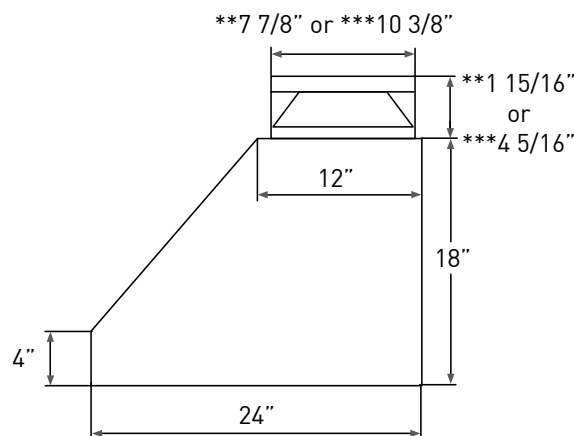

SIDE

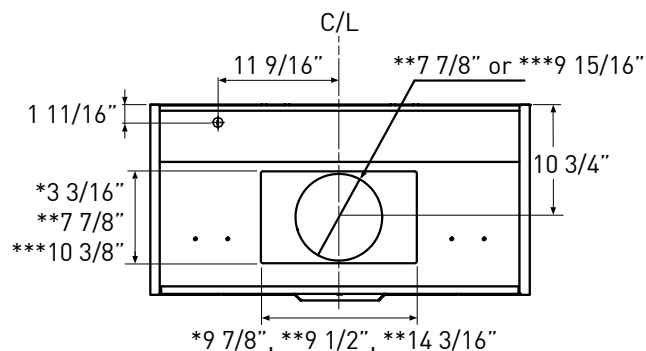

BACK

* Single Blower Rect. Ducting Dimension
 ** Single Blower Round Ducting Dimension
 *** Dual Blower Dimension

MODEL

Stainless Steel
SizeAK7500BS
30"AK7536BS/AK7542BS
36"/42"AK7548BS/AK7554BS
48"/54"

PERFORMANCE

Included Single Blower

200-650 CFM, 1-6 sones

200-650 CFM, 1-6 sones

200-650 CFM, 1-6 sones

ACT 390*

200-390 CFM, 1-4 sones

200-390 CFM, 1-4 sones

200-390 CFM, 1-4 sones

ACT 290*

200-290 CFM, 1-3 sones

200-290 CFM, 1-3 sones

200-290 CFM, 1-3 sones

Optional Dual Blower

400-1,200 CFM, 3.5-9 sones

400-1,200 CFM, 3.5-9 sones

400-1,200 CFM, 3.5-9 sones

FEATURES

ACT™ Technology

Yes

Yes

Yes

Controls

Electronic Touch

Electronic Touch

Electronic Touch

Speed Levels

6**

6**

6**

Auto Delay-Off

Yes

Yes

Yes

CleanAir Function

Yes

Yes

Yes

Lighting

Halogen, 35W x2

Halogen, 35W x2

Halogen, 35W x4

Dual-Level Lighting

Yes

Yes

Yes

Filters

Pro Baffle x2

Pro Baffle x3

Pro Baffle x4

Wireless Remote Control Option

Yes, RF

Yes, RF

Yes, RF

Dual Internal Blower Option

Yes

Yes

Yes

Recirculating Option***

Yes, Single Blower Only

Yes, Single Blower Only

NA

DUCT SPECIFICATIONS

Vertical Single Internal Blower

8" Round

8" Round

8" Round

Horizontal Single Internal Blower†

3-1/4" x 10" or 8" Round

3-1/4" x 10" or 8" Round

3-1/4" x 10" or 8" Round

Vertical Dual Internal Blower

10" Round

10" Round

10" Round

Horizontal Dual Internal Blower

10" Round

10" Round

10" Round

AC POWER (Single Blower)

120V, 60Hz, Max. 5A

120V, 60Hz, Max. 5A

120V, 60Hz, Max. 5A

AC POWER (Dual Blower)

120V, 60Hz, Max. 9A

120V, 60Hz, Max. 9A

120V, 60Hz, Max. 9A

OPTIONAL ACCESSORIES

12" Duct Cover

AK0720

AK0726/AK0722

AK0728/AK0724

Wireless Remote Control

14000005

14000005

14000005

Dual Internal Blower Kit

PBD-1200A

PBD-1200A

PBD-1200A

Recirculating Kit

ZRC-7000B

ZRC-7036B/ZRC-7042B

NA

Backsplash with Shelves

AK0710

AK0716/AK0712

AK0718/AK0714

Bloom™ GU10 LED

Z0B0040

Z0B0040

Z0B0040

Make-Up Air Kit (Single Blower)

MUA008A

MUA008A

MUA008A

Make-Up Air Kit (Dual Blower)

MUA010A

MUA010A

MUA010A

MOUNTING HEIGHT RANGE†† 26" - 36"

26" - 36"

26" - 36"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

*ACT™ only available with single internal blower.

**When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.

***Recirculating kit includes a return-air box which adds an additional 4" to the hood height. Recirculating kit is only compatible with single blower.

†If horizontally ducting via 3-1/4" x 10", the maximum airflow of 650 CFM will be reduced to 550 CFM.

††Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™ AIRFLOW CONTROL TECHNOLOGY™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can
limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT
MAY17.0301

