

HydroTap Celsius All-in-One (AIO) Tap

Product Spec Sheet



HydroTap Celsius All-in-One (AIO) Tap

The ultimate in functionality, the HydroTap Celsius All-In-One (AIO) is fitted over your sink and offers all five water types – filtered boiling, chilled and sparkling water for drinking, cooking and sanitizing, plus unfiltered hot & cold water for washing dishes. And it's all wrapped up in Zip Water's enduringly stylish design!

So whether you are looking to upgrade your home hydration or you want the convenience of cooking made easy, the HydroTap Celsius AIO is the perfect tap to meet your needs.

What's more, the Celsius AIO tap is available in seven luxury finishes from our classic chrome to our stylish brushed gold and gunmetal to complement any kitchen style.

HydroTap Celsius All-in-One Tap - Available Finishes



Chrome



Brushed
Chrome



Matte
Black



Brushed
Gold



Nickel



Brushed
Nickel



Gunmetal

Product Order Codes for HydroTap Celsius All-in-One Taps

HydroTap Celsius All-in-One BCS Tap in Chrome	01034259
HydroTap Celsius All-in-One BCS Tap in Brushed Chrome	01034260
HydroTap Celsius All-in-One BCS Tap in Matte Black	01034261
HydroTap Celsius All-in-One BCS Tap in Brushed Gold	01034263
HydroTap Celsius All-in-One BCS Tap in Nickel	01034264
HydroTap Celsius All-in-One BCS Tap in Brushed Nickel	01034265
HydroTap Celsius All-in-One BCS Tap in Gunmetal	01041864

Please see individual product spec sheets for command center and accessory product specs and order codes.

HydroTap Celsius All-in-One Tap

Product Spec Sheet






Installation Requirements

The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

Sufficient space and clearance to install the HydroTap as detailed in the product installation guidelines is required. Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations.

HydroTap Celsius All-in-One - Tap Specs

Style:	HydroTap Celsius All-in-One Tap- includes boiling water safety lock
Hole Size:	2" / 50mm
Tap Height:	17 ⁵ / ₁₆ " (440mm)
Installation:	Over the sink as the primary faucet
Flow Rate:	Max 1.8gpm / 6.81 lpm
Sparkling Water Flow Rate	0.4 gpm / 1.51 lpm
Product Certifications:	IAPMO - NSF/ANSI 372, 42, 53, CSA B438.1, ASSE 1023, ASSE 1087, DOE; cUL; CEC
Mixer Type:	Ceramic disc cartridge
Water outlets:	Installation requires both hot and cold water supplies
Clearance for handle:	Minimum distance from center hole to wall: 3 ⁷ / ₁₆ " (88mm)

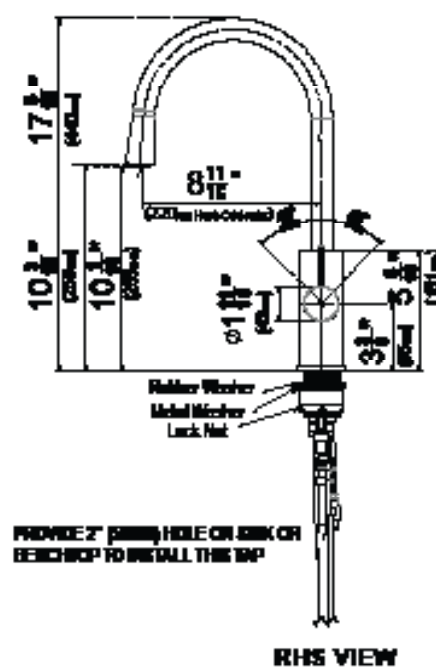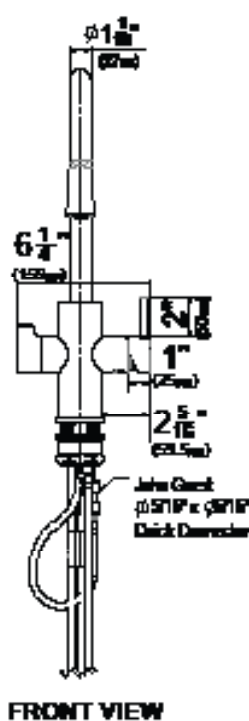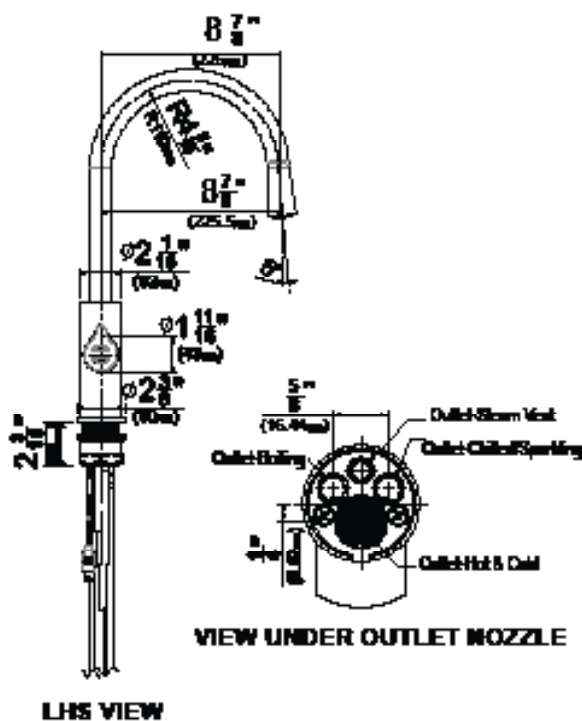

Installation by Zip Professional Service is available in select metro areas and can be arranged with a phone call to 1-833-233-2358 or by emailing wecare@na.zipwater.com. Technical Installation assistance over phone or video call can be obtained by calling our customer care line at 833-233-2358, Monday through Friday 8am - 5pm Central Time.

HydroTap Celsius Plus All-in-One (AIO)

Boiling/Chilled/Sparkling (BCS) 120V Product Spec Sheet



HydroTap Celsius Plus AIO BCS 120V - Command Center Technical Specs

Command Center Product Order Code:	01043466
Style:	HydroTap Celsius Plus All-in-One BCS 120V
Water outlets:	Installation requires both hot and cold water supplies
Water Pressure:	Min 37psi – Max 100psi (2.60 - 7.03kg/cm ²) with a minimum flow rate of 1 gpm (3.79lpm)
Water Connection:	2 x 1/2" BSP or 3/8" FPT compression (depending on manufacture date) with shut off valve is required within 3' (0.9m) of the installation
Integral Water Values:	All HydroTap systems are fitted with a Dual Check Valve and a 50psi (3.52kg/cm ²) Pressure Limiting Valve
Water Supply Requirements:	Potable drinking water supply
Optimal Total Dissolved Solids (TDS) Range:	TDS Min 50ppm – Max 150ppm
Integral Water Filter:	0.2 micron, 1 size - replace every 1,100 gallons / 4,163 liters or 12 months
Power Rating:	110-120V, 50-60Hz, 15 amp power supply with a NEMA 5-15 outlet
Command Center Dimensions (WxDxH):	13.3" x 18.2" x 13.1" / 339mm x 462mm x 333mm
Minimum Air Gap:	Minimum of 2" / 50mm clearance on left and right side and 8" / 200mm above
Minimum Cabinet Size (Without Garbage Disposal):	20" wide x 24" deep / 508mm wide x 610mm deep
Minimum Cabinet Size (With Garbage Disposal):	30" wide x 24" deep / 762 mm wide x 610mm deep When installing the HydroTap Celsius All-in-One BCS 120V in a cabinet with a garbage disposal, the cabinet must be at least 30" wide x 24" deep and the sink must have an off-centered drain to allow for the placement of the garbage disposal off to one side and the command center to the other.
Maximum Hose Connection Length	3' / 0.9m (tap to command center)
Minimum Distance Needed for Installation	15" / 381mm (interior wall to garbage disposal)
Warranty:	2 year Limited Warranty
Compatible CO₂ Cylinder:	Zip Water 1.5lb CO ₂ or 5lb CO ₂ (if space allows) with CGA-320 fitting
CO₂ Operating Pressure:	Min 39psi - Max 44psi / Min 2.74 - Max 3.09kg/cm ²

HydroTap Celsius All-in-One (AIO)


Boiling/Chilled/Sparkling (BCS) 120V Product Spec Sheet



Installation Requirements


The HydroTap is a pump-driven system so the installation of the Tap must be within 3' (0.9m) of the base command center. Installation on most countertops is straightforward however, some stone countertops may require a specialized cutting service.

Installation and connection of your HydroTap must be carried out by a qualified person, observing all local, state, & federal regulations.

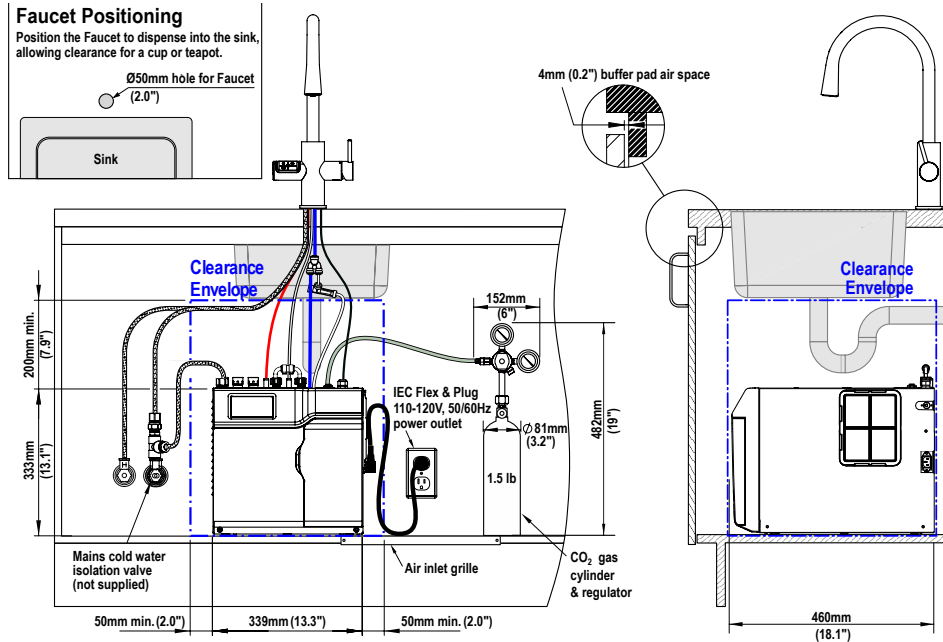

Mains hot water supply installation

Hot and cold water supply required


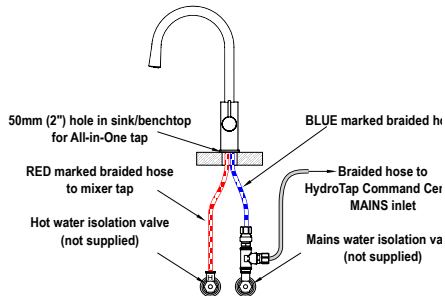


Ventilation requirements

Contact your local service provider if ventilation is not suitable

Clearance envelope

Position the Faucet and the Command Centre as close together as possible.

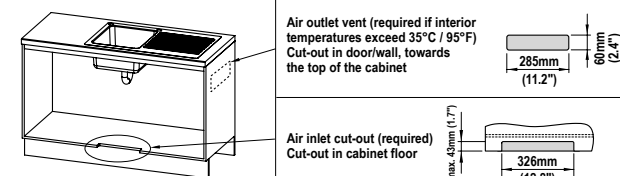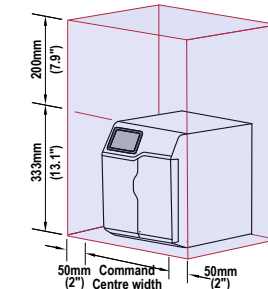

Please call 1-833-233-2358 M-F 8am-7pm Central Time with questions.

1.5lb CO₂ Refillable Beverage-Grade Cylinder

Product Spec Sheet



1.5lb CO₂ Cylinder - Product Specs

Product Order Code:	01034347
Product Description:	2 x 1.5lb Beverage-Grade Carbon Dioxide Cylinder (regulator sold separately)
CO₂ Capacity:	Approximately 400 8oz cups (per canister)
CO₂ Operating Pressure:	Min 39psi - Max 43psi / Min 2.74 - Max 3.02kg/cm ²
Height (without regulator):	Approximately 12" / 305mm
Height (with regulator):	Approximately 19" / 482mm
Cylinder Diameter:	Approximately 3.2" / 81mm
Max Width (with regulator):	Approximately 6" / 152mm
Valve Type:	CGA-320
Storage Temperature:	CO ₂ should be stored out of direct sunlight. Max storage temperature is 120°F (48.8°C)



5lb CO₂ Refillable Beverage-Grade Cylinder

Product Spec Sheet



5lb CO₂ Cylinder - Product Specs

Product Order Code:	01034348
Product Description:	1 x 5lb Beverage-Grade Carbon Dioxide Cylinder (regulator sold separately)
CO₂ Capacity:	Approximately 1,200 8oz cups (per canister)
CO₂ Operating Pressure:	Min 39psi - Max 43psi / Min 2.74 - Max 3.02kg/cm ²
Height (without regulator):	Approximately 18" / 457mm
Height (with regulator):	Approximately 19.5" / 495mm
Cylinder Diameter:	Approximately 5.5" / 140mm
Max Width (with regulator):	Approximately 10.5" / 267mm
Valve Type:	CGA-320
Storage Temperature:	CO ₂ should be stored out of direct sunlight. Max storage temperature is 120°F (48.8°C)



CO₂ Regulator

Product Spec Sheet



CO₂ Regulator - Product Specs



Product Order Code:	01034349
Product Description:	CO ₂ Regulator
Compatible Products:	Zip Water 1.5lb and 5lb CO ₂ cylinders
Height:	Approximately 6" / 152mm
Width:	Approximately 7" / 178mm
Depth:	Approximately 4.3" / 109mm

