



Z5645-BWL

TAG _____

HET Elongated, ADA Height, Floor Mounted Back Outlet EcoVantage® Flush Valve Toilet with Antimicrobial Glaze



Z5645 Series

Recommended Trim:

- Z5955SS-EL** Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

Note: To ensure system performance:
Minimum Running Water Pressure = 25 psi.

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements.



Architectural/Engineering Approval

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED
3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
Phone: 905-405-8272 Fax: 905-405-1292

Z5645 HET Series

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards while using as little as 1.1 gallons of water per flush.
- Universal high efficiency toilet can be specified with 1.28 gpf [4.8 lpf], 1.6 gpf [6.0 lpf] or dual flush valves.
- Vitreous china
- Antimicrobial ceramic glaze utilizing SmartSilver™ nanotechnology to create a permanent surface that inhibits the growth of stain and odor causing mold, mildew and bacteria, thus minimizing the need for cleaning chemicals and water to cleanse the bowl.
- 4-1/8" Back Outlet Rough-in
- Elongated front rim
- ADA Compliant rim height
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Includes bolt caps
- Shipping Weight: 65 lbs.

Engineering Specification:

Recommended Trim:

- Z5645-BWL with Top Spud**
Vitreous china, 1.1 gpf [4.16 Lpf] or greater, high efficiency, floor mounted back outlet toilet with siphon jet flushing action, antimicrobial ceramic glaze, elongated front rim, ADA compliant rim height, 1-1/2" top spud inlet connection and 4-1/8" back outlet rough-in height. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush, engineered to provide optimal performance.

*Replaces Zurn Z5640

- Z5646-BWL with Bedpan Lugs**
Vitreous china, 1.1 gpf [4.16 lpf] or greater, high efficiency, floor mounted back outlet toilet with siphon jet flushing action, antimicrobial ceramic glaze, elongated front rim, with integral bedpan lugs, ADA compliant rim height, 1-1/2" top spud inlet connection and 4-1/8" back outlet rough-in height. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush, engineered to provide optimal performance.

*Replaces Zurn Z5641

See Zurn One Systems for suggested packages.

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.




Z5645-BWL

TAG _____

HET Elongated, ADA Height, Floor Mounted Back Outlet EcoVantage® Flush Valve Toilet with Antimicrobial Glaze

Rough-in dimensions for Z5645 Series

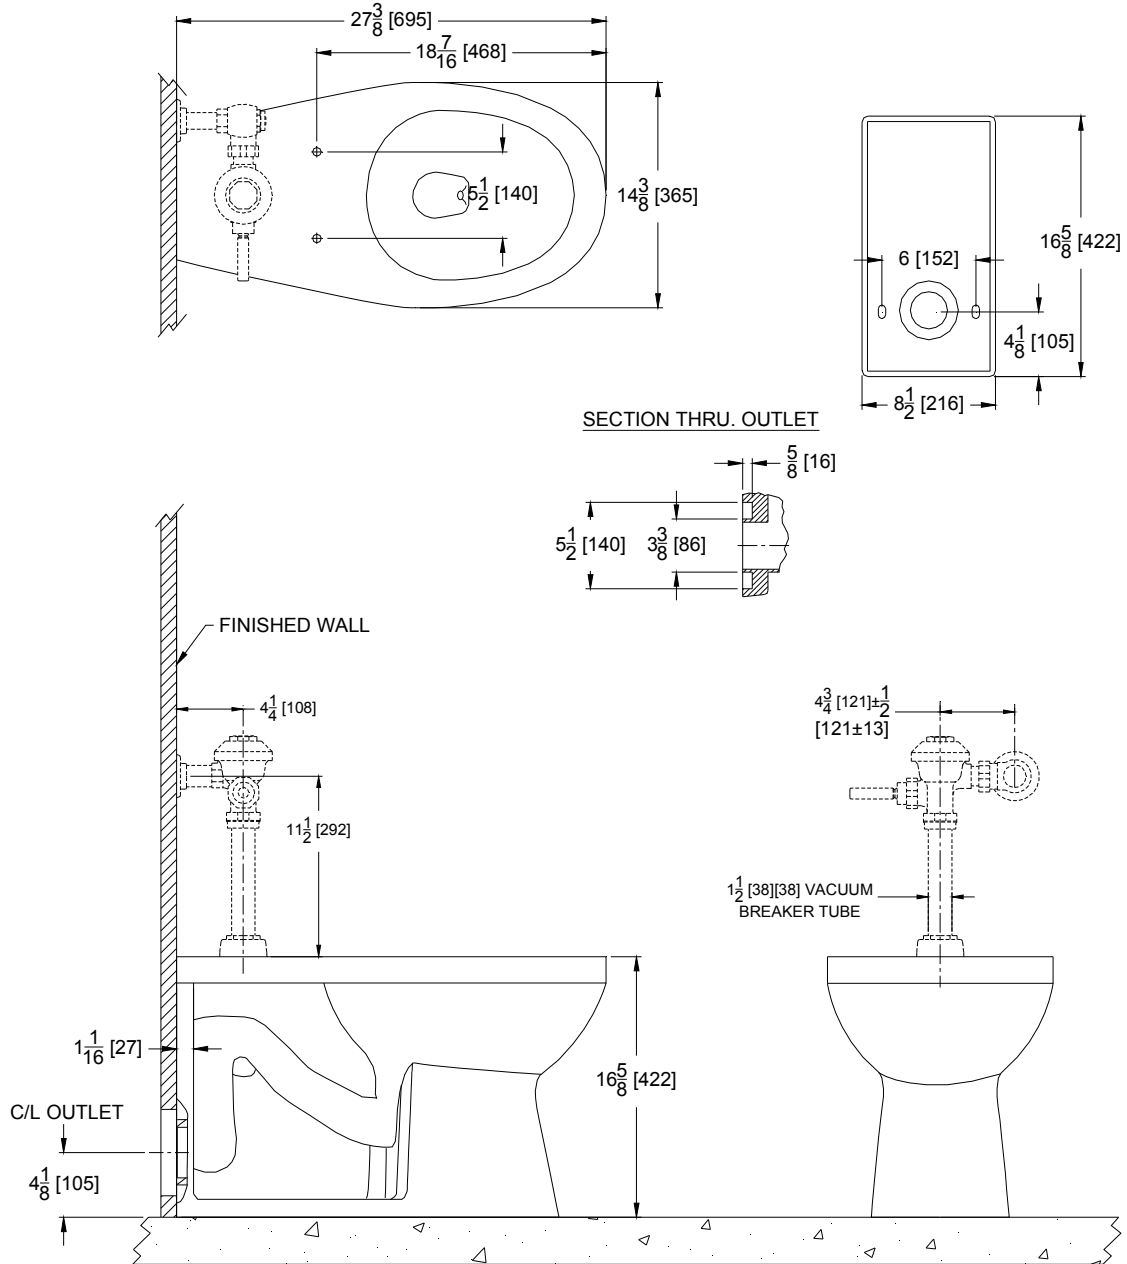

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements.

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION
 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
 Phone: 1-800-997-3876 ♦ Fax: 919-775-3541
 www.zurn.com
 In Canada: ZURN INDUSTRIES LIMITED
 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2
 Phone: 905-405-8272 Fax: 905-405-1292

