

Model: Z.WC2.S.TM Zurn One Sensor Wall Hung Toilet System with 1.28 GPF EcoVantage[®] Battery Powered Flush Valve

TAG

Architectural/Engineering Specification:

Complete EcoVantage[®] high efficiency 1.28 gpf sensor actuated, battery powered, wall mounted commercial water closet system with ZER6000AV-HET-TM exposed, sensor activated with manual override button chrome plated closet diaphragm flushometer for either left or right hand supply, Z5955SS-EL open front commercial toilet seat, Z5615-BWL wall mounted vitreous china water closet with Z5977-NEO NeoSeal outlet sealing gasket assembly kit and Z5610-NUT-EXT-KIT manufactured by Zurn Industries.

Product Features:

- 1.28 gpf (gallons per flush)
- · Wall mounted elongated front rim top spud toilet
- · High efficiency siphon jet flush action
- 2-1/8" fully glazed trapway
- Large water spot 12' x 10'
- Vitreous china wall bowl construction
- · Static weight load of 1000 lb*
- Diaphragm- type flushometer complete with Zurn's Go Blue® TPE, chloramine resistant, dual seal diaphragm with a clog resistant filtered by-pass.
- Manual Override Button
- · High pressure vacuum breaker
- Adjustable tailpiece
- Contol stop with internal siphon guard protection, vandal resistant cap, sweat solder kit and cast wall flange with set screw
- Open front, elongated, white commercial toilet seat with SS check hinges
- NeoSeal® outlet gasket asssembly
- · 20% water savings over standard 1.6 gpf system

Recommended Carrier:

Z1201 or **Z1202 EZCarry™** 500 lbs load rated High Efficiency Carrier



Zurn One System Packout Includes: Water Closet - Z5615-BWL:

Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action and elongated front rim with 1-1/2" top spud.

Flush Valve - ZER600AV-HET-TM:

The ZER EZ Gear-Driven Water Closet Flush Valve is performance engineered with the dual action of the ceramic disc cartridge and motor gear-driven operation. Its polished chrome-plated finish, modern top-mount design with manual override button, and quiet diaphragm operation are ideal for new and retrofit commercial restroom applications.

Z5955SS-EL:

Elongated, open front white toilet seat with stainless steel check hinges

Z5610-NUT-EXT-KIT:

Retrofit nut kit for extending carrier studs from existing wall

Z5977-NEO:

NeoSeal® gasket kit for wall mounted bowls

Compliance and Certification:



Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. Fixture - Complies with ASME A119.2 / CSA B45.1 Architectural/Engineering Approval


The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541 In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292



TAG _

Rough-in Dimensions

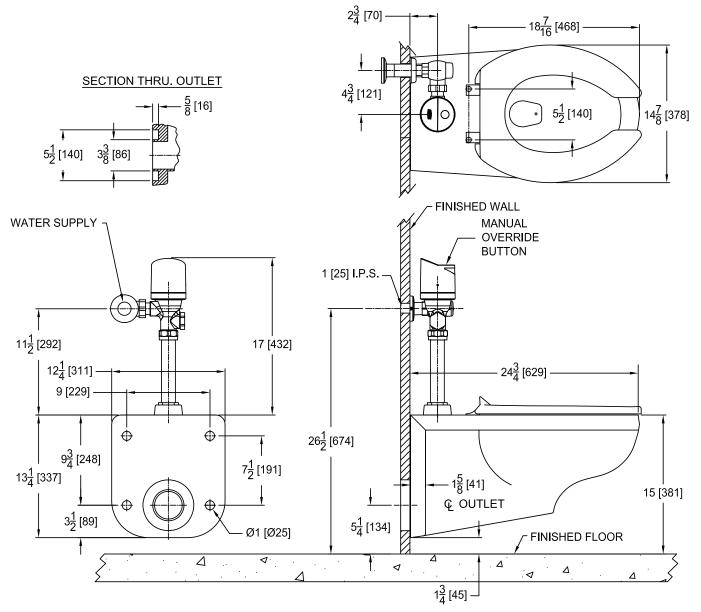

*Note: For ADA compliance, top of seat height should be installed at 17"-19" from finished floor.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements. Fixture - Complies with ASME A119.2 / CSA B45.1

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541 In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292