



CAREGUARD[®] 1.5 GPM LAMINAR FLOW OUTLET


G67795 (19F)

G67796 (19M)


TAG _____

Engineering Specifications: Zurn AquaSpec[®] G67795, G67796

1.5 GPM (5.7 l/min.) Careguard[®] laminar flow outlet with built in Agion[®] antimicrobial protection. Certification to NSF/ANSI Standard 61 and ASME A112.18.1/CSA B125.1.



**G67795
(19F)**
3/4-27 Female



**G67796
(19M)**
13/16-27 Male


Technical Data:

Material: Housing- Chrome Plated Brass
Body- Acetal Copolymer
Washer- EPDM

Max Working Temperature: 150°F (66°C)

Max Working Pressure: 125 psi (860 kPa)

FLOW RATE CURVE

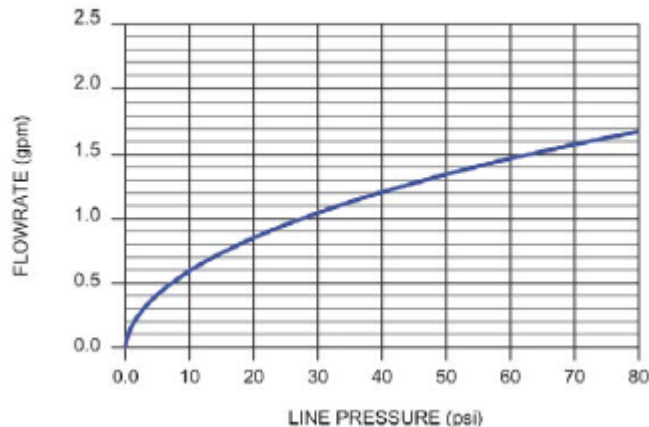

ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292