


\_\_\_\_\_

TAG

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

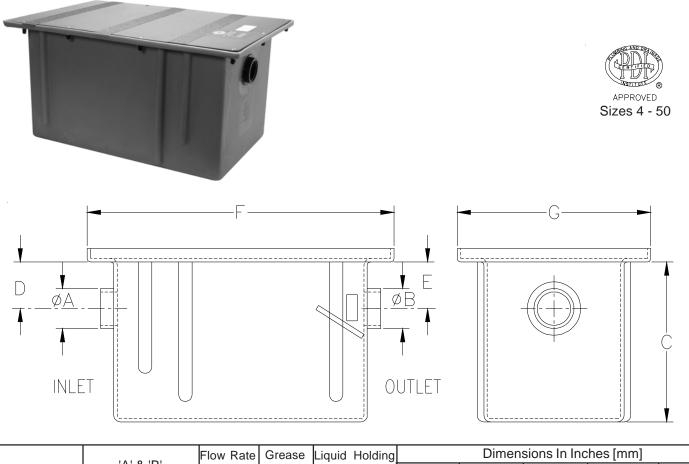

	'A' & 'B' Inlet/Outlet	Flow Rate	Grease Capacity Lbs. [kg]	Liquid Holding Capacity Gal. [L]	Dimensions In Inches [mm]				
Product		G.P.M. [L.P.M.]			С	D	Е	F	G
GT2702-04	2 [51] FEMALE NPT	4 [15]	8 [4]	1.5 [5.7]	9-1/2 [241]	2 [51]	2 [51]	15 [381]	10 [254]
GT2702-07	2 [51] FEMALE NPT	7 [26]	14 [6]	4.6 [17.4]	11 [279]	3-1/4 [83]	3-1/4 [83]	20 [508]	14-1/2 [368]
GT2702-10	2 [51] FEMALE NPT	10 [38]	20 [9]	6 [22.7]	12 [305]	3-1/2 [89]	3-1/2 [89]	23 [584]	14-1/2 [368]
GT2702-15	2 [51] FEMALE NPT	15 [57]	30 [14]	10.2 [38.6]	13 [330]	3-1/2 [89]	3-1/2 [89]	23 [584]	19-1/2 [495]
	2 [51] FEMALE NPT	20 [76]	40 [18]	15 [56.8]	14 [356]	3-1/2 [89]	3-1/2 [89]	29 [737]	19-1/2 [495]
	3 [76] FEMALE NPT	25 [95]	50 [23]	20.8 [78.7]	17 [432]	4 [102]	4 [102]	32-1/2 [826]	19-1/2 [495]
GT2702-35	3 [76] FEMALE NPT	35 [132]	70 [32]	26.1 [98.8]	18 [457]	4 [102]	4 [102]	32-1/2 [826]	22 [559]
GT2702-50	3 [76] FEMALE NPT	50 [189]	100 [45]	35.5 [134.4]	18 [457]	4 [102]	4 [102]	37 [940]	25 [635]
GT2702-75	3 [76] FEMALE NPT	75 [284]	150 [68]	61.8 [234]	25 [635]	5-3/4 [146]	5-3/4 [146]	44-1/4[1124]	25 [635]

## GT2702 Grease Interceptor

Recommended for removing and retaining grease from wastewater in kitchen and restaurant areas where food is prepared. Constructed of non-corrosive polyethelene, the interceptor handles continuous temperatures to 212° F. Trap is furnished with NPT connections, removable flow diffusing baffles and external vented flow control device.

\_\_\_\_ 6 [152] Extension

\* Regularly furnished unless otherwise specified.