


Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

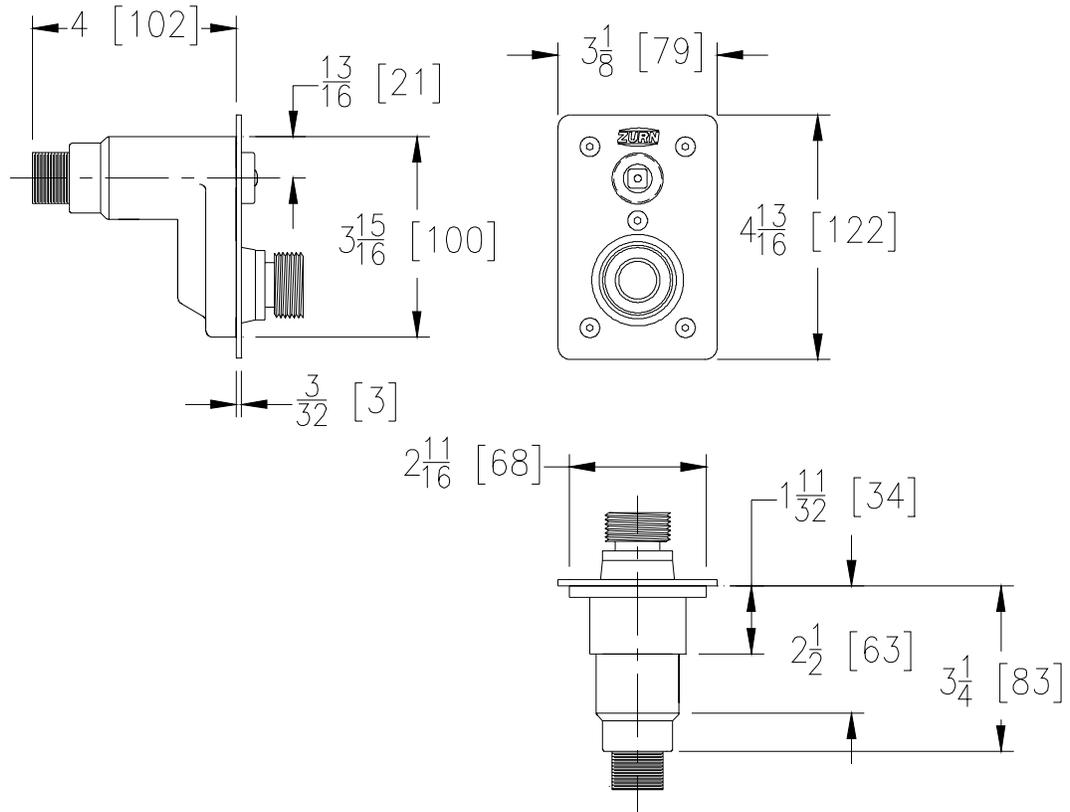

| Wall Thickness In Inches | Approx. Wt. Lbs. [kg] |
|--------------------------|-----------------------|
| N/A                      | 3 [1]                 |

**ENGINEERING SPECIFICATION:** Z1333-C Exposed Ecolotrol, anti-siphon, automatic draining, wall hydrant for moderate climate and interior wall installation, complete with integral backflow preventer, all bronze interior parts, non-turning operating coupling with free-floating compression closure valve, and combination 3/4 [19] female solder and 3/4 [19] male pipe thread inlet connection standard. Regularly furnished with 3/4 [19] hose connection. Includes operating key.

**OPTIONS** (Check/specify appropriate options)

**SUFFIXES**

- \_\_\_\_ -34EL 3/4 [19] 90° Solder Inlet Elbow
- \_\_\_\_ -34FIP 3/4 [19] Female Pipe Thread Connection
- \_\_\_\_ -PB Polished Bronze Finish
- \_\_\_\_ -RK Hydrant Parts Repair Kit



1011