


TEMP-GARD SHOWER UNIT Z7101-SS-LH TAG

ENGINEERING SPECIFICATIONS: ZURN Z7101-SS-LH

Single handle pressure balancing mixing shower unit, with single bronze stem, stainless steel balancing piston integral with stem assembly, metal lever handle, integral service stops and brass adjustment limit stop screw in cap. Complete with double seal packing, adjustable brass packing nut, and removable brass seats; all exposed trim with polished nickel chrome plated surface. Valve supplied with standard shower head, arm, and flange. The valve inlets and shower outlet are in 1/2" female copper sweat connections.

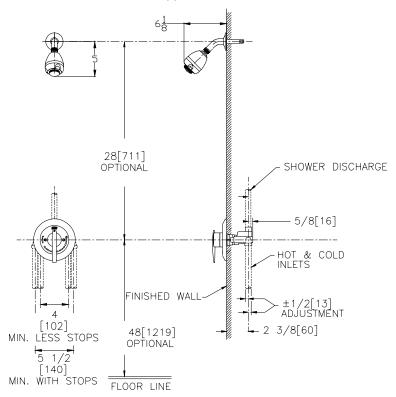

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONS (Check/specify appropriate options) Use with Z7000 prefix

STANDARDS

Suffix	Description	Tes
BC	Back Connections (1/2") (For 90° Installations),	val
	Shipped as Loose Adaptors, to be Installed in the Field	AS
CC	Conversion Cover Plate	CS
DT	Dial Thermometer	Sh
IP	1/2" Female Threaded Connections, Shipped as Loose	Me
	Adaptors, to be Installed in the Field	for
MT	Metal Cover, Escutcheon & Stem Handle	
RC	Reverse Connections (For Back-to-Back Installations)	
SC	Pair of Dual Spring Check Valves	
STH	ABS Chrome Plated Handle with Screw and Button	
WF	Wall Mounting Flange For Fiberglass or Panel Wall Installat	tion

sted to meet the following standards for lves and plumbing fittings: SSE Standard No. 1016 SA Standard B125-M89 hower heads meet ANSI A112.18.1 eets or Exceeds ANSI A117.1M standard r physically handicapped



ZURN INDUSTRIES, LLC COMMERCIAL BRASS OPERATION 2640 SOUTH WORK STREET FALCONER NY 14733 Phone: 1-716-665-1132 Fax: 1-716-665-1135 World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED 🔸 3544 Nashua Drive 🔶 Mississauga, Ontario L4V1L2 🔶 Phone: 905/405-8272 Fax: 905/405-1292