



eVO
CONCEPT +

COP-174W

High temp dishwasher - Hoodtype



QUICK VIEW

Dimensions: H x W x D	26" x 30 1/8" x 60 5/8"
Weight (net/crated)	319 lbs / 365 lbs.
Voltage	208-230V/1-3Ph/60Hz
Total power	17.7KW
Wash pump	(2) 1

SHORT FORM SPECIFICATION

The unit provided to be a Fagor EVO Concept Plus dishwasher, model COP-174W. The Concept Plus dishwashers come with the following. Effi Wash, Effi Rinse, Eco Fill, Soft Start, Multi-tension and Multi-power systems, Soft Lift counterbalanced hood system.

The unit is constructed with ANSI 304 stainless steel stamped design including wash tank, guides and control panel. IPX4 - Protection against water jets on control panel. Corner or straight-thru operations. Built-in detergent pump. Built-in rinse aid dispenser. 17 3/8" clearance for ware.

Each unit comes standard with one (1) flat rack and one (1) peg rack.

Hood type dishwasher COP-174W

Production:

60 Racks per hour

Standard rack size 20" x 20"

Functions and Benefits

Fagor's Concept + range of dishwashers offers a highly efficient and effective washing and rinsing system, becoming the perfect solution for those locations with low pressure water network and high production requirements. Built in durable stainless steel with electromechanical components and simple digital controls for a user-friendly operation.

- **Effi Wash:** Optimized hydraulic system provides a strong mechanical action combined with the optimum clean water in the tank. Balanced power keeps the perfect sanitation temperature during the cycle of the wash..
- **Effi Rinse:** Built-in water pressure pump and air break system assuring the best sanitation result, with a linear 180°F full rinsing cycle. It also works with low input water pressure, fitting in installations that do not reach the minimum recommended 15 -25 psi.
- **Eco Fill:** New thermostatic tank water filling system that speeds up drastically the start-up time of the machine. Water is heated in the boiler before filling the tank, making the process fast and efficient.
- **Soft Start:** Wash-pump power control that prevents wares from damage at the beginning of the washing cycle while assuring a low noise level in your facility.
- **Multi Power:** Easily adapt the power level to your needs. Choose the maximum power for the highest production requirements or reduce consumption with a low power set up.
- **Digital Controls:** simple digital control panel for intuitive and user-friendly operation.




Construction

- New **stainless steel body structure with stamped design** (wash tank, rack guides, control panel..), made to resist heavy usage.
- AISI-304 Stainless steel. Independent wash & rinsing arms, tray filters.
- Field adjustable **straight-thru or corner** operations.
- Higher clearance: 17 3/8".
- Advance **soft-lift** counterebalanced system and magnetic switch for the hood.
- **IPX4** - Stronger protection against water hose cleaning and external humidity.
- **Multi-connection box:** Conveniently located electrical box for easy access that improves maintenance and allows for single or three phase connection in the field.
- Built-in **detergent and rinse pumps**.

Accessories

- Racks for dishes, glasses and trays
- Cutlery containers
- Drain tempering valve



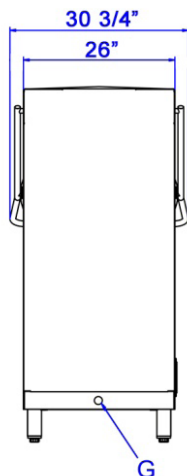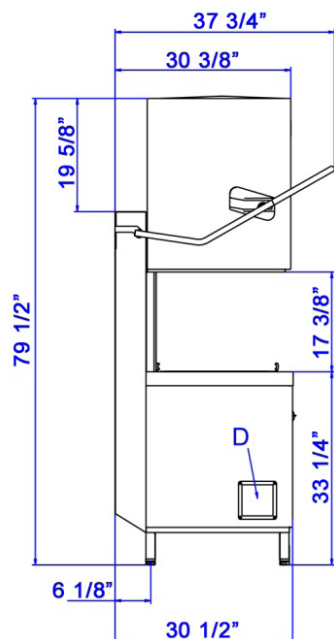

A	B	C	D	E	F	G
Water inlet *	Drain hose **	Power supply cable, strain relief	Terminal box	Rinse aid inlet	Detergent inlet	Equipotential bond ***
<p>* Water inlet 3/4" female hose connector on 5' long flexible hose supplied with machine. Adaptor for 3/4" female garden hose fitting also supplied. 120°-140°F optimum water temperature; 20 -25 psi flow rinse pressure.</p> <p>** Drain 5' long, 1/2" I.D. flexible hose. Maximum 26 3/4" drain height permits indirect connection to drain pump.*** Protection from dangerous potential differences</p>						

SPECIFICATIONS	COP-174W
Wash Cycles (seconds)	55-75-120
Continuous cycle	●
Electronic control panel and digital display	●
Productivity (*)	
Racks/hour	60
Dishes/hour	1,080
Glasses/hour	2,160
Standard Rack size (inches)	19 3/4 x 19 3/4
Weight (Net/Crated)	319 lbs / 365 lbs
Dimensions (inches)	
Width	26
Depth	30 1/8
Height	60 5/8
Useful Loading Height (clearance)	17 3/8
Open Hood Height	81 1/3
Capacity (gallons)	
Wash Tank	8.98
Boiler	2.37
Water consumption per cycle	0.63

SPECIFICATIONS	COP-174W	
Wash pump motor (HP)	(2) 1	
Power (kW)		
Tank heating element	4.5	
Boiler/Booster heating element	12	
Wash pump(s)	(2) 0.6	
Rinse pressure pump	0.26	
Total power	17.7	
Working Temperature (°F)		
Washing	160	
Rinsing	180	
AMP for 60 Hz		
Volts	1 Phase	3 Phase
208	75 Amp	47 Amp
220	78 Amp	49 Amp
240	85 Amp	52 Amp
Water Protection Rating	IPX4	
Noise level (dBA)	<65	
Detergent & water pump	●	

(*) Assumed 18 dishes and 36 glasses per rack

The manufacturer reserves the rights to modify materials and specifications without notice.