



# KM-2600S\_J3

## 3 PHASE STACKABLE ICE CUBER



KM-2600S\_J3  
05/10/17  
Item # 13418

W x D x H  
48" x 27<sup>3/8</sup>" x 36<sup>7/16</sup>"

### KM Edge SERIES

**KM-2600SWJ3**  
Water-Cooled 3 Phase  
Shown on optional bin: B-900

**KM-2600SRJ3** ★  
Remote Air-Cooled 3 Phase



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Individual crescent cube
- ▶ Stainless steel evaporator
- ▶ CycleSaver™ design 

- Up to 2617 lbs. of ice production per 24 hours
- Stackable for 5234 lbs. per 24 hours ice production in the same floor space
- Durable stainless steel exterior
- Protected by H-GUARD Plus® Antimicrobial Agent 
- EverCheck™ alert system 
- R-404A Refrigerant

### Available on Bins:


**B-800**      **B-1150SS**      **B-1500SS**      *Top kit may be required.*  
**B-900**      **B-1300SS**      **B-1650SS**      *See Bin Spec Sheets.*

### Warranty:

Valid in United States, Canada, Puerto Rico and U.S. Territories.  
Contact factory for warranty in other countries.

|                   |             | ICE PRODUCTION                                             |      |                         |      | WATER USAGE                              |                                            | ELECTRICAL                           |                                              |          |               |                              |                    |                 |
|-------------------|-------------|------------------------------------------------------------|------|-------------------------|------|------------------------------------------|--------------------------------------------|--------------------------------------|----------------------------------------------|----------|---------------|------------------------------|--------------------|-----------------|
| Condenser         | Model       | Air / Water Temp<br>Lbs. per 24 hours<br>70°/50°F 90°/70°F |      | Per Cycle<br>Lbs. Cubes |      | Potable<br>Gal. per 100 lbs.<br>90°/70°F | Condenser<br>Gal. per 100 lbs.<br>90°/70°F | kWh Used<br>per 100 lbs.<br>90°/70°F | Max. Fuse Size<br>or HACR<br>Circuit Breaker | Amperage | Voltage       | Heat<br>Rejection<br>BTU/hr. | Shipping<br>Weight | ENERGY<br>STAR® |
| Water-Cooled      | KM-2600SWJ3 | 2482                                                       | 2480 | 43.9                    | 2160 | 16.0                                     | 87                                         | 3.60                                 | 30A                                          | 12.8A    | 208-230V/60/3 | 31,600                       | 415 lbs.           |                 |
| Remote Air-Cooled | KM-2600SRJ3 | 2617                                                       | 2580 | 42.6                    | 2160 | 16.0                                     | N/A                                        | 3.61                                 | 30A                                          | 20.6A    | 208-230V/60/3 | 36,000                       | 440 lbs.           | ★               |

## KM Edge Cube Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187 - 253V

## Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 3/8" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 3/8" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent




# KM-2600S\_J3

## 3 PHASE STACKABLE ICE CUBER




KM-2600S\_J3  
05/10/17  
Item # 13418

FRONT VIEW




WATER-COOLED




REMOTE AIR-COOLED

SIDE VIEW

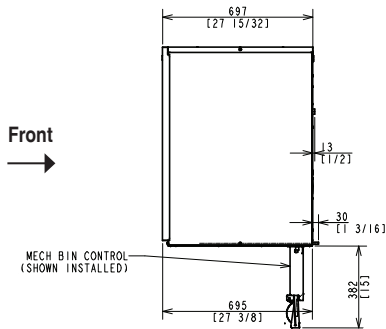


WATER-COOLED

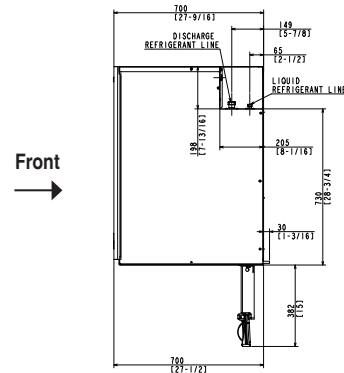


REMOTE AIR-COOLED

REAR VIEW

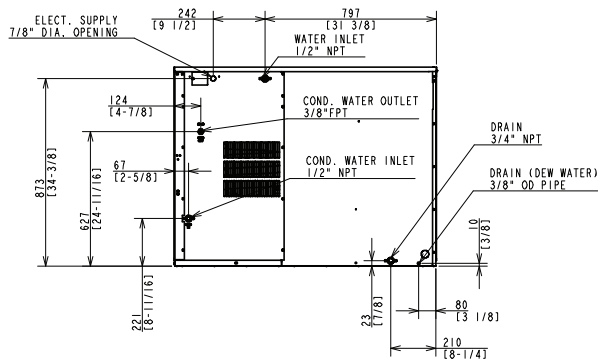


WATER-COOLED

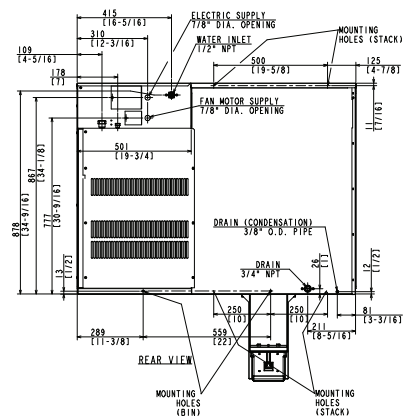


REMOTE AIR-COOLED

BOTTOM VIEW

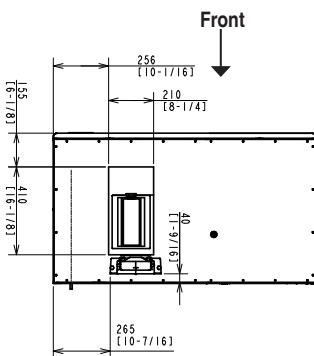

WATER-COOLED



REMOTE AIR-COOLED

**URC-26J Remote Condenser (Sold Separately)**  
(W x D x H) 46 3/8 X 15 11/16 X 40 1/2  
For Use with KM-2600SRJ3

**Pre-Charged Tubing Kits**  
(Sold Separately)  
20' R404-20610  
35' R404-35610  
55' R404-55610



Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

