Durable Design

- Stainless steel interior & exterior
- Coated evaporator coil
- 3 height adjustable, heavy duty, PE coated wire shelves
- LED interior lighting
- Digital temperature display
- Door lock with keys
- Simple plug-in installation
- Oversized bottom mount compressor section
- Door swing is field reversible with kit # KB-BLHK

Energy Efficient

- Self-closing door with stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door has been open for 3 minutes.
- · Foamed-in place high-density polyurethane insulted body, CFC-free
- · Large evaporator & condenser for quick cooling and greater efficiency
- Bottom mount compressor provides energy savings and ease of service

Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL & Energy Star guaranteeing quality standards and energy efficiency
- 4" swivel castors with 2 front brakes
- Easy grip handle
- Entirely self-contained system
- Automatic defrost system
- Digitally controlled temperature system
- Accommodates full-size bun sheet pans
- · Easily adjustable shelf height
- Internal storage capacity is 18.9 cu. ft.
- NEMA 5-15 plug
- R-290 Natural Refrigerant
- Compressor : Refrigerator 1/4 HP / Freezer 1/2 HP Holding temperature: Refrigerator 33°F to 39°F / Freezer 5°F to -9.4°F





5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com



Single Door Series Refrigerator & Freezer Bottom Mount Compressor

KBSR-1 | KBSF-1



Location:

Qty:


Model:

Item:

Miami, FL, United States Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100




Single Door Series Refrigerator & Freezer Bottom Mount Compressor

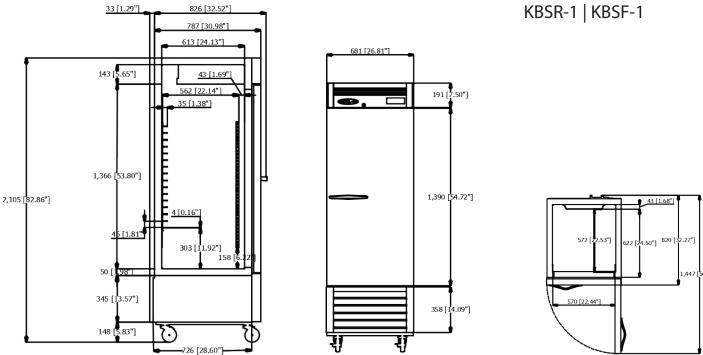


Side View

33 [1.29"]

826 [32.52"]





Top View

Model Number	Description	Interior / Exterior	# of Shelves	Capacity (cubic ft)	External Dimensions w/handle (W x D x H in)	Internal Dimensions (W x D x H in)	Compressor Size	Voltage / Frequency	Amps	Working Temp	Refrigerant	Ship Weight (Ibs)
KBSR -1	Bottom Mount Single Door Refrigerator	Stainless Steel	3	18.9	26.8 x 32.75 x 82.7	22.8 x 24.3 x 53.8	1/4	115V 60 HZ	2.0	33⁰F to39⁰F	R-290	315
KBSF -1	Bottom Mount Single Door Freezer	Stainless Steel	3	18.9	26.8 x 32.75 x 82.7	22.8 x 24.3 x 53.8	1/2	115V 60 HZ	5.6	5ºF to -9ºF	R-290	328



These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty: 36 months parts and labor. Additional 24 months on compressor (part only)

KOOL-IT is a registered trademark of MVP Group. Specifications subject to change without notice.



5659 Royalmount Ave. Montreal, QC, Canada H4P 2P9 Telephone: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832 sales@mvpgroupcorp.com / mvpgroupcorp.com

Miami, FL, United States Telephone: 786.600.4687 / Toll Free: 844.218.8477 Fax: 786.661.4100