



## Freezers Undercounter KUCF Series

KUCF-27-1 | KUCF-36-2  
KUCF-48-2 | KUCF-60-2

### Durable Design

- Created to endure the everyday stress of the commercial kitchen environment, to protect your long term investment and guarantee superior food preservation
- Coated evaporator coil
- 2 height adjustable, heavy-duty, PE coated wire shelves per door
- Spring loaded, self-closing doors
- Door swing is field reversible on 27" units (part KB-5246 required)

### Energy Efficient

- Self-closing door with stay open feature
- Self-closing door with 45° stay-open feature
- Improved magnetic door seal gasket
- Foamed-in place high-density polyurethane insulated body, CFC-Free
- Environment friendly R290 refrigerant

### Superior Quality

- Designed for mobility, reliability & efficiency in commercial kitchens
- 4" swivel casters with 2 front brakes (2.5" casters can be ordered as option)
- 36" high working surface
- Easy grip door handle(s)
- Entirely self-contained system
- Forced air refrigeration
- Automatic defrost system
- Easily adjustable shelf height
- Stainless steel interior & exterior
- KUCF Series Undercounter Freezers Temperature range : -1°F to -11°F



Intertek Intertek

Nema 5-15P  
Dedicated Circuit

|               |      |
|---------------|------|
| Project Name: |      |
| Location:     |      |
| Item:         | Qty: |
| Model:        |      |



5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com

Miami, FL, United States  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100



## Freezers Undercounter KUCF Series

KUCF-27-1 | KUCF-36-2  
KUCF-48-2 | KUCF-60-2



KUCF-27-1




KUCF-36-2




KUCF-48-2



KUCF-60-2

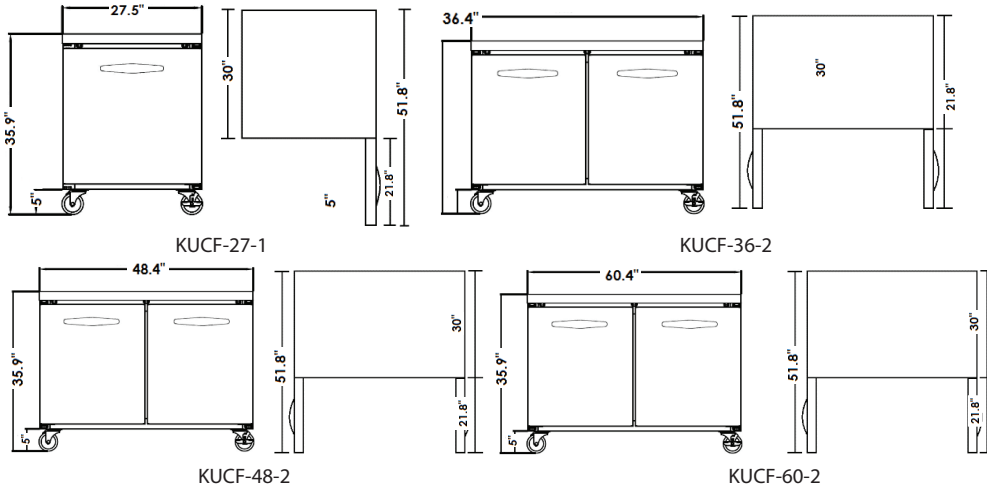

Side View of all Undercounter Units

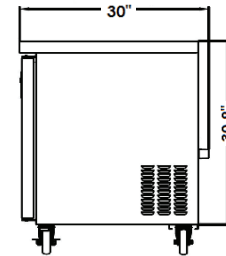

| Model Number | Capacity (cubic feet) | Number of Doors | Number of Shelves | HP  | Amps | Refrigerant | Net Weight (lbs.) | Shipping Weight (lbs.) | Shipping Dimensions (W x D x H inches) | External Dimensions (W x D x H inches) | Internal Dimensions (W x D x H inches) |
|--------------|-----------------------|-----------------|-------------------|-----|------|-------------|-------------------|------------------------|--|--|--|
| KUCF-27-1    | 7                     | 1               | 2                 | 1/4 | 3.2  | R290        | 150               | 176                    | 28.9 x 34.1 x 36.6                     | 27.5 x 30 x 35.9                       | 24.7 x 27.2 x 28.9                     |
| KUCF-36-2    | 9.5                   | 2               | 4                 | 1/2 | 5.2  | R290        | 187               | 213                    | 37.8 x 34.1 x 36.6                     | 36.4 x 30 x 35.9                       | 33.4 x 27.2 x 28.9                     |
| KUCF-48-2    | 13.1                  | 2               | 4                 | 1/2 | 6    | R290        | 209               | 256                    | 49.7 x 34.1 x 36.6                     | 48.4 x 30 x 35.9                       | 43.3 x 20.1 x 26.5                     |
| KUCF-60-2    | 16.7                  | 2               | 4                 | 1/2 | 6.2  | R290        | 247               | 298                    | 61.8 x 34.1 x 36.6                     | 60.4 x 30 x 35.9                       | 55.4 x 20.1 x 26.5                     |



Nema 5-15P  
Dedicated Circuit

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.

Warranty: 36 months parts and labor.  
Additional 24 months on compressor (part only)

KOOL-IT is a registered trademark of MVP Group.  
Specifications subject to change without notice.



5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com

Miami, FL, United States  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100