

Tempra® Series Technical Specifications

Technical Data



Certified to ANSI/UL Std. 499
Conforms to CAN/CSA Std. C22.2 No.88



Tested and certified by WQA
against NSF/ANSI 372 for
lead free compliance.



Tempra® Model Item Number	12 Trend 239213 12 Plus 239219	15 Trend 239214 15 Plus 239220	20 Trend 239215 20 Plus 239221	24 Trend ³ 239216 24 Plus ³ 239222	29 Trend ⁴ 239217 29 Plus ⁴ 239223	36 Trend ⁵ 239218 36 Plus ⁵ 239225							
Phase	single 50/60 Hz		single ⁶ 50/60 Hz		single ⁶ 50/60 Hz								
Voltage	240 V or 208 V		240 V or 208 V		240 V or 208 V								
Wattage	12 kW	9 kW	14.4 kW	10.8 kW	19.2 kW	14.4 kW							
Amperage draw	50 A	44 A	2 x 30 A	2 x 26 A	2 x 40 A	2 x 35 A							
Number & min. recommended size of circuit breakers ¹ (DP)	1 x 50 A		2 x 30 A		2 x 40 A								
Number of runs & min. recommended wire size ² (copper)	1 x 6/2 AWG		2 x 10/2 AWG		2 x 8/2 AWG								
Maximum temperature increase above ambient water temp	@ 1.50 GPM	54°F	41°F	65°F	49°F	88°F	66°F	92°F	82°F	92°F	92°F	92°F	92°F
	@ 2.25 GPM	36°F	27°F	43°F	37°F	58°F	44°F	73°F	54°F	87°F	66°F	92°F	82°F
	@ 3.00 GPM	27°F	20°F	33°F	25°F	44°F	33°F	54°F	41°F	66°F	49°F	82°F	61°F
	@ 4.50 GPM	-	-	-	-	29°F	22°F	37°F	27°F	44°F	33°F	55°F	41°F
Min. water flow to activate unit	0.37 GPM / 1.4 l/min		0.50 GPM / 1.9 l/min		0.50 GPM / 1.9 l/min								
Weight	13.5 lb / 6.1 kg		16.1 lb / 7.3 kg		16.1 lb / 7.3 kg								
Nominal water volume	0.13 gal / 0.5 l		0.26 gal / 1.0 l		0.26 gal / 1.0 l								
Max. inlet water temperature	131°F / 55°C												
Dimensions	WIDTH 16 ⁵ / ₈ " / 42.0 cm x HEIGHT 14 ¹ / ₂ " / 36.9 cm x DEPTH 4 ⁵ / ₈ " / 11.7 cm												
Working pressure	150 PSI / 10 BAR												
Tested to pressure	300 PSI / 20 BAR												
Water connections	¾" NPT												

¹ This is our recommendation for overcurrent protection sized at 100% of load. Check local codes for compliance if necessary. Tankless water heaters are considered a non-continuous load.

² Copper must be used. Conductors should be sized to maintain a voltage drop of less than 3% under load.


³ Requires minimum 150 A main service. ⁴ Requires 200 A main service. ⁵ Requires 300 A main service.

⁶ 29/29 Plus & 36/36 Plus may be wired for balanced 3-phase 208V. 15/15 Plus, 20/20 Plus, 24/24 Plus may be wired for unbalanced 3-phase 208V.


Scroll for temp. rise charts. ↓

Tempra® Series Technical Specifications

Temperature Rise vs. Flow Rate at 240 V and 208 V

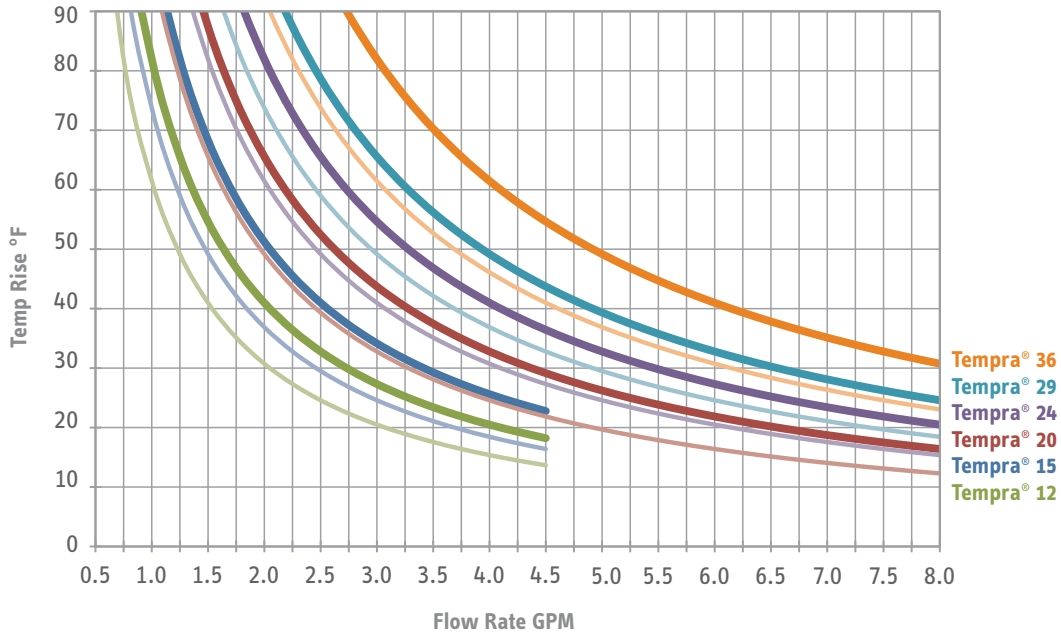

Temperature Rise vs. Flow Rate at 240 V

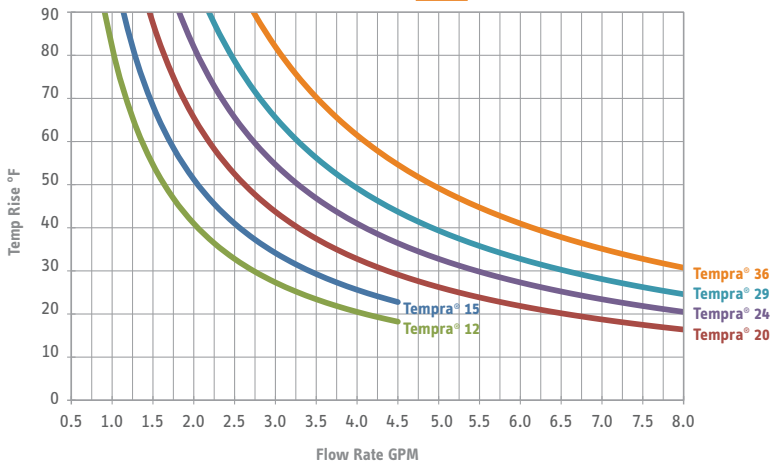

Temperature Rise vs. Flow Rate at 208 V

