



SPECIFICATIONS  
**P10 SERIES**  
 RANGE HOODS

## Professional Series Range Hood

• **Hood Dimensions**

Overall bottom projection - 24"  
 Available height (without Soffit) -10"  
 Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Thermostat**


Thermostat detects when the heat level rises to an excessive amount and automatically turns the hood on.

• **Lighting**

2 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).

• **Heat Lamps** (model P1036W)

2 - type R40, medium base IR 250W (not included).

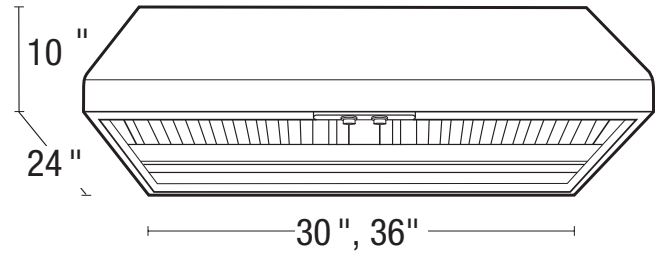

• **Ducting Options**

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (available separately) specified for size of motor.

• **Filters**

Grease Baffles: Dishwasher safe, Stainless Steel baffles (included).

### BLOWERS SOLD SEPARATELY

| Model  | Description             | Width | Height |
|--------|-------------------------|-------|--------|
| P1030  | Range Hood              | 30"   | 10"    |
| P1036  | Range Hood              | 36"   | 10"    |
| P1036W | Range Hood w/Heat Lamps | 36"   | 10"    |

| Motor Size | POWER USAGE    |              |                |              |                  |              |
|------------|----------------|--------------|----------------|--------------|------------------|--------------|
|            | 30"            |              | 36"            |              | 36" w/Heat Lamps |              |
|            | Full Load Amps | Breaker Size | Full Load Amps | Breaker Size | Full Load Amps   | Breaker Size |
| 300 CFM    | 1.7 amps       | 15 amp       | 1.7 amps       | 15 amp       | 5.9 amps         | 15 amp       |
| 500 CFM    | 1.9 amps       | 15 amp       | 1.9 amps       | 15 amp       | 6.1 amps         | 15 amp       |
| 600 CFM    | 2.1 amps       | 15 amp       | 2.1 amps       | 15 amp       | 6.3 amps         | 15 amp       |
| 900 CFM    | 6.5 amps       | 15 amp       | 6.5 amps       | 15 amp       | 10.7 amps        | 15 amp       |
| 1200 CFM   | 8.0 amps       | 15 amp       | 8.0 amps       | 15 amp       | 12.2 amps        | 20 amp       |

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

| <b>PROJECT</b>    |              |     |         |     |       |      | <b>ARCHITECT</b>    |     |                              |             |  |
|-------------------|--------------|-----|---------|-----|-------|------|---------------------|-----|------------------------------|-------------|--|
| <b>LOCATION</b>   |              |     |         |     |       |      | <b>ENGINEER</b>     |     |                              |             |  |
| <b>CONTRACTOR</b> |              |     |         |     |       |      | <b>SUBMITTED BY</b> |     |                              | <b>DATE</b> |  |
| FAN NUMBER        | MODEL NUMBER | CFM | IN W.C. | RPM | WATTS | AMPS | SONES               | QTY | OPTIONAL EQUIPMENT & REMARKS |             |  |
|                   |              |     |         |     |       |      |                     |     |                              |             |  |



**U.S.:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:** 8 Edvac Drive  
 Brampton, Ontario L6S 5P2  
 Tel: (905) 456-2033 • 800-250-8767  
 Fax: (905) 456-1015