


Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_

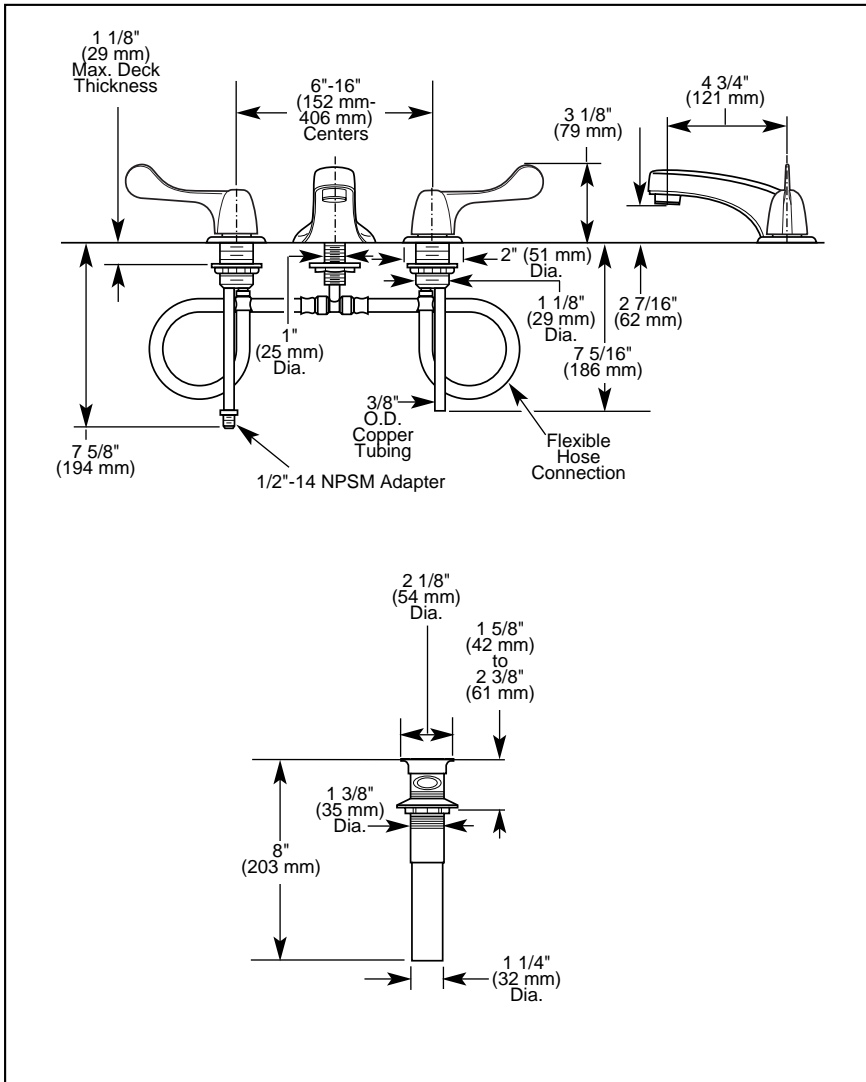

- Two Handle
- Widespread
- Three Hole Sink Applications
- 6"-16" (152 mm-406 mm) Centers


**STANDARD SPECIFICATIONS:**

- Two handle lavatory faucets for concealed mounting on three hole sinks.
- Solid brass fabricated end valves and spout body.
- Widespread 6"-16" (152 mm-406 mm) centers.
- 4 3/4" (121 mm) long rigid spout.
- No lift rod hole.
- Metal grid strainer (3549-WFHDF).
- Vandal resistant metal wrist blade handles. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 1/4 turn stops. Replaceable non-metallic seats operate in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- 2.2 gpm (8.3 L/min) vandal resistant aerator.
- 3/8" O.D. copper supply tube inlets with 1/2"-14 NPSM adapters.
- Available Options for Field Conversion:
  - Vandal resistant aerator with wrench - 2.2 gpm (8.3L/min). Chrome plated. Order RP246.
  - Vandal resistant laminar flow spray outlet with wrench - 2.2 gpm (8.3L/min). Chrome plated. Order RP21966.
  - Vandal resistant spray outlet with wrench - .5 gpm (1.9L/min). Chrome plated. Order RP31704.



**COMPLIES WITH:**

- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified

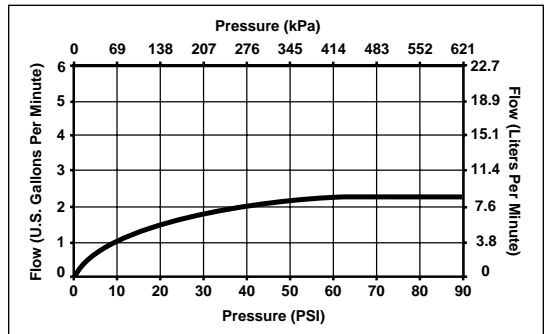

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselectonline.com](http://www.specselectonline.com) for finish options and product availability.