

# Electronic Exposed Teck® Flush Valves

**TECK®  
COMMERCIAL**



❑ **81T201-WMSBT**  
- Exposed Battery Operated  
1-1/2" Top Inlet Closet Fixture

- Polished chrome plated vandal resistant metal cover with 4" wallmount sensor
- Right or left-hand supply installation
- ADA compliant, automatic operation battery powered H<sub>2</sub>OPTICS™ technology infrared sensor
- Four (4) 'C' cell batteries
- Low battery level indicator (5000 flushes remaining)
- Infrared sensor range adjustment of 610mm-1422mm (24" - 56") in 8" increments, factory set at 40" (±2")
- Vandal resistant copper tube conduit
- 24 hour courtesy flush factory set to off
- 6 VDC input
- Electronic manual override button
- Quiet action, Teck® exposed diaphragm flush valve
- Chloramine resistant diaphragm
- Forged brass diaphragm retainer
- Renewable seat
- Polished chrome plated finish
- **External water conserving flush adjustment**, factory set at 60 PSI to 6 litre (1.6 US gal.) (except -48 and -6 models)
- **1" FIP/Copper sweat inlet adaptor**, angle check stop with protecting cap
- Adjustable 121mm (4-3/4") plus or minus 11mm (7/16") inlet/valve outlet centers
- Vacuum breaker
- Cover tube, stainless steel wall flange, spud flange, concealed spud nut, and 292mm (11-1/2") outlet tube.

❑ **81T201-6-WMSBT**  
Same as 81T201-WMSBT,  
but **Not Field Adjustable**

❑ **81T201-48-WMSBT**  
Same as 81T201-WMSBT, but factory set  
at 60 PSI to 4.8 litre (1.27 US gal.),  
**Not Field Adjustable**



**81T201-WMSBT**

**Approvals:**

- CSA certified
  - Complies to ASSE 1037
  - ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
  - IAPMO listed
- (Contact Delta Representative for State and/or Local Approvals.)

**Engineer/Architect Approval**


Model Specified:

Approval:

Date:



**H<sub>2</sub>OPTICS™**

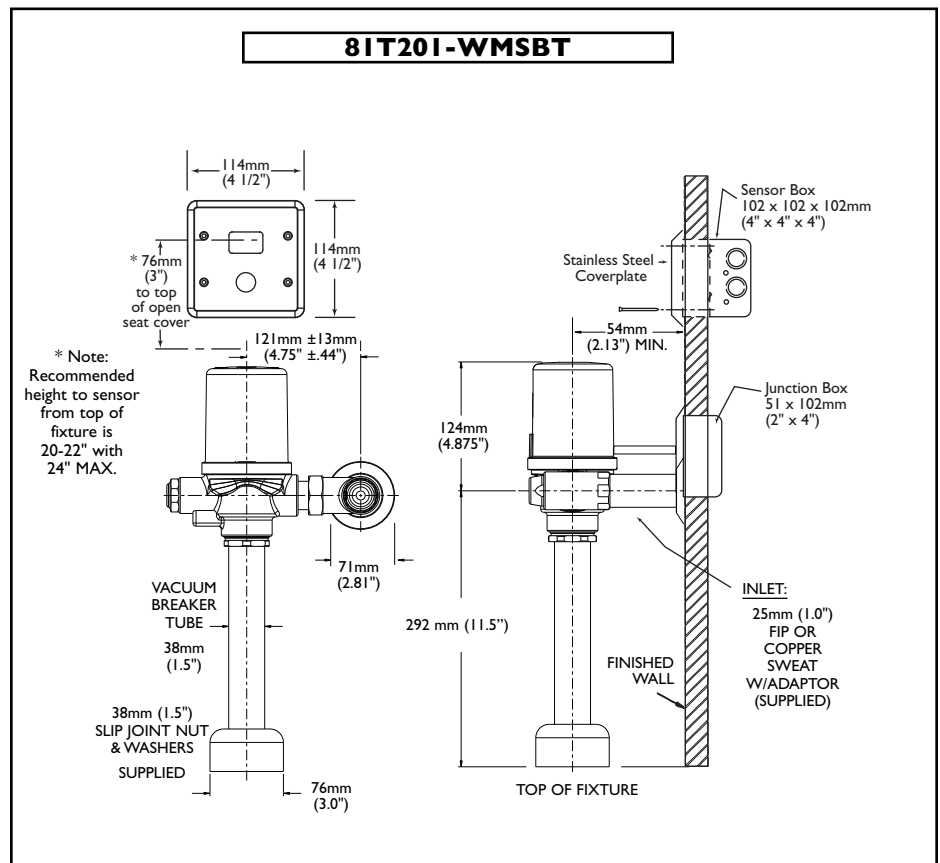

Note: For high and low pressure applications, please see page FEA-81T High Water Pressure note for more details.

Verify flow requirements with bowl manufacturer.

Note: Measurements may vary ± 6mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page as a product submittal sheet.