

# **The Multimax™**

## **FP8008CH Series**



# **SPECIFICATION SHEET**




*Product Specifications Subject To Change*



**MULTIMAX™**

**FP8008CH  
Ceiling Fan**

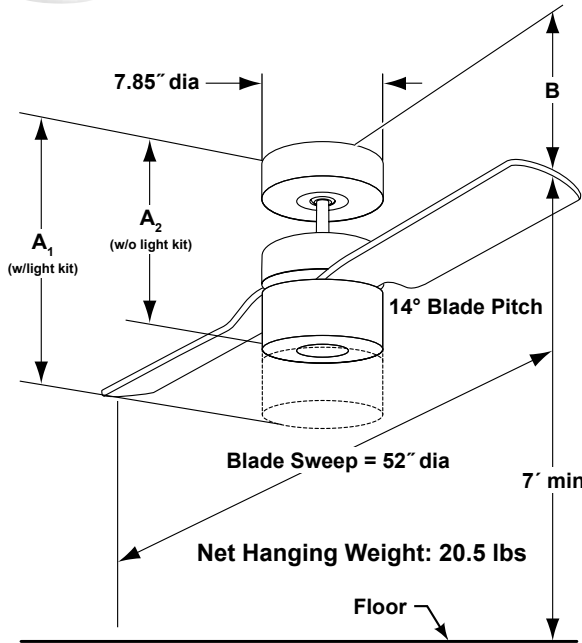

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/6" downrod	13.00"	17.00"	10.70"
Fan w/12" downrod	19.00"	23.00"	16.70"
Fan w/18" downrod	25.00"	29.00"	22.70"
Fan w/24" downrod	31.00"	35.00"	28.70"
Fan w/36" downrod	43.00"	47.00"	40.70"
Fan w/48" downrod	55.00"	59.00"	52.70"
Fan w/60" downrod	67.00"	71.00"	64.70"
Fan w/72" downrod	79.00"	83.00"	76.70"

Available Finishes	
CH	Chrome with optional opal frosted glass light kit included

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	156	5062	100	0.45	51
Med	118	3393	111	0.42	31
Low	81	2185	126	0.34	17

**INSTALLATION REQUIREMENTS:**

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

172 x 18 motor is designed for optimal performance with this fan.

**BLADE SETS:**

A set of 4 reversible, cherry/mahogany, wood blades are included. Fan can be configured for 2-, 3- or 4-blade operation. Not recommended for Damp Location.

**CONTROL OPTIONS:**

The hand-held touch screen remote control (CRL8TS) with receiver is included. Touch-screen remote has 3 separate fan speeds and off position, 1 to 12-hour fan timer and 3 min delay light-off feature. Reversing switch located on fan housing. Optional wall control (CWRL4WH/LA) is available.

**LIGHTING OPTIONS:**

2-bulb (18-watt max low-profile CFL bulbs - included) downlight fixture is included with this fan assembly but not required for fan operation (cap is included for use in its place). Maximum downlight wattage not to exceed 36 watts.

**DOWNROD OPTIONS:**

The Multimax™ fan comes with a 1/2" Dia. x 6" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Multimax™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call your local dealer for more information.

**LOCATION USE:**

Fan is rated for dry locations only.



celebrating 25 years

**10983 Bennett Parkway  
Zionsville, IN 46077**

**Toll Free (888) 567-2055**

**FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website @ [www.fanimation.com](http://www.fanimation.com)**

*Copyright 2010 Fanimation, Inc.  
All Rights Reserved*



2010/01