

PARTS & ASSEMBLY SHEET










Fixture Name: Alannah 5503-BA1 CH

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Mounting Strap  1 ea 3/4"X4"	Junction Box Screw  2 ea #8-32N*H25mm	Thread Rod  1 ea 3/8"*H50mm
Wire Connector  2 ea P3 Orange	Hex Nut  1 ea 3/8"*H x 3mm	DECO NUT (Round)  1 ea 1 ea 3/8"*H10mm
Green Ground Screw  1 ea #8-32N*H10mm	Spring Washer  1 ea @15X3mm	Spacer  1 ea Ø55*H18mm
Part Needed _____	Quantity _____	
Part Needed _____	Quantity _____	
Reason why _____	(missing, scratched, broken glass, bent, bad finish)	
Comments _____		

FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet before assembling the fixture.

1. Slide Glass Shade (H) and Spacer (I) over Socket (L) and secure Glass Shade (H) and Spacer by threading the Socket Ring (J) onto the Socket (L) until tight.

2. Install the light bulb in accordance with the fixture's specifications .

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

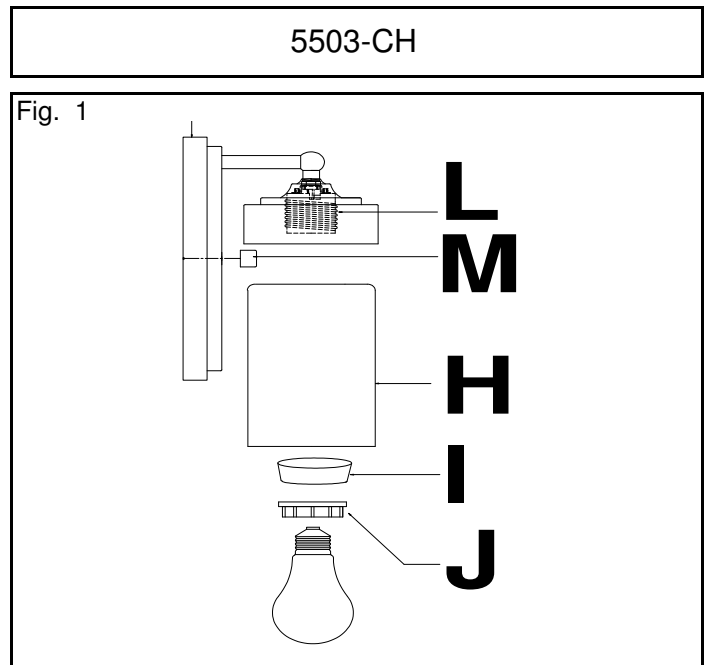

For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A), tighten with Hex Nut and Spring Washer (C).
4. Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 6. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Strap (B) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

8. Place the fixture Back Plate over the Threaded Rod (D), so it protrudes through the hole in the Back Plate.
9. Thread the Deco Nut (M) onto the Threaded Rod (D) and continue turning until the Back Plate is snug against the wall.
10. Install glass as per the fixture assembly instructions

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING)
YOUR INSTALLATION IS NOW COMPLETE. RETURN
POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

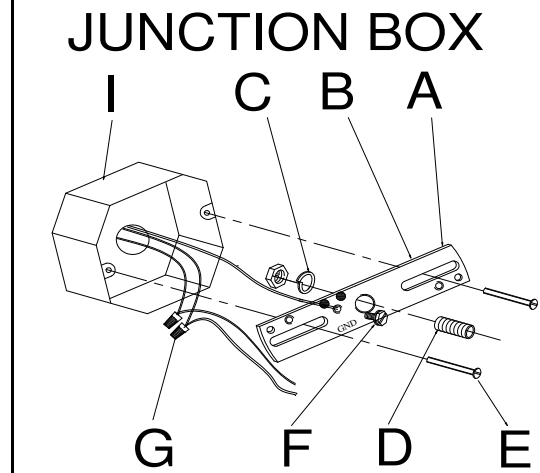


Fig. 2

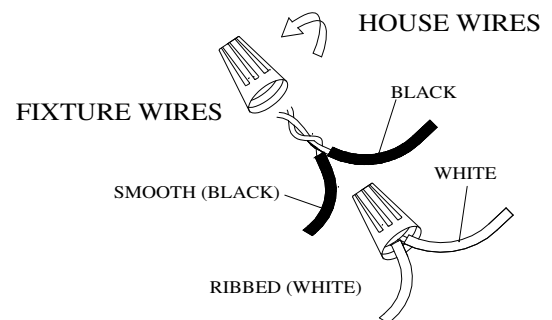


Fig. 3

