




Family: Bolla | Item No. 4669




Drawing 1 - Fixture Assembly

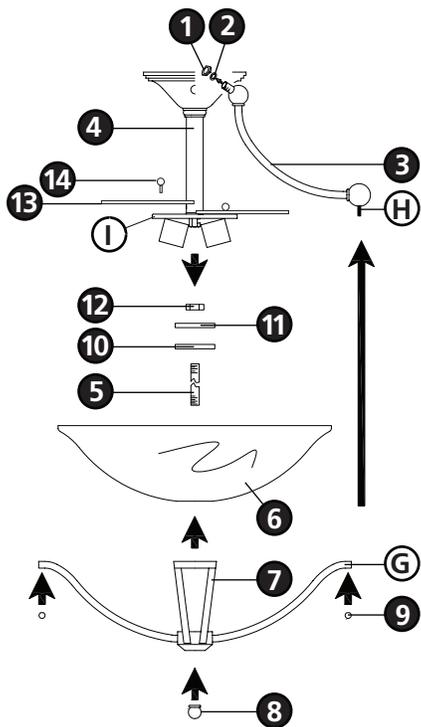

Drawing 2 - Strap Detail

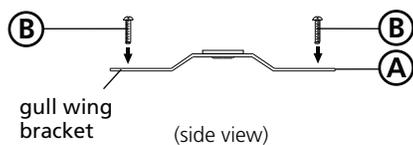

Drawing 3 - Fixture Mounting

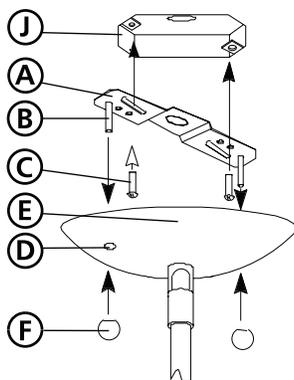

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

2

1. To assemble main body, attach arms (3) to fixture column assembly (4) using lockwasher (2) and hex nut (1) - see **Drawing 1**.
2. Remove ball knob stud (14) from socket plate (I).
3. Take diffuser (13) and line up hole with holes in socket plate.
4. Thread ball knob stud (14) back into socket plate to secure diffuser.

3

1. Prepare gem strap (A) for mounting by threading two screws (B) provided into back of gull wing bracket of gem strap (A) - see **Drawing 2**.
 - Be sure the holes into which the screws are threaded match the spacing of holes (D) in the canopy (E) - see **Drawings 2 and 3**.
2. Mount gem strap (A) to junction box (J), using the two 1" screws (C).

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

4

- Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to complete installation of this fixture.

5

1. Prior to installing glass, fixture can now be lamped.
2. To install glass, set glass (6) onto bottom assembly (7) - see **Drawing 1**.
3. Attach finial (8) to end of nipple (5).
4. Slip nipple (5) through center hole in assembly (7) and glass (6).
5. Slip rubber washer (10) and metal washer (11) onto nipple (5).
6. Thread nut (12) onto end of nipple (5) and tighten.
Note: Over tightening may cause damage to glass.
7. Line up the holes on the bottom assembly (7) arms (G) with the threaded stud (H) extending out from end of arm (3).
8. Thread ball knob (9) onto end of stud (H).

Note: Maximum wattage for 4669 fixture is 100 watts per bulb.

10.26.10