

Fuzion 6666 Soaking Bath



Product Codes beginning with: FUZ6666BCX

Also applies to products sold under part numbers: KR00, KR05

TECHNICAL SPECIFICATIONS

	English	Metric
Outer Dimensions	65 3/4" L x 65 3/4" W x 24" H	1670 mm L x 1670 mm W x 610 mm H
Interior Dimensions (bottom of bath) L x W (Mid)	42" L x 42" W	1067 mm L x 1067 mm W x 1067 mm W
Drain Configuration	Center drain	Center drain
Bath Weight (empty)	150 lbs	68 kg
Total Weight/Floor Loading	1,733 lbs 57.7 lbs/ft ²	788 kg 282 kg/m ²
Operating Gallonage (max)	148 (max) U.S. Gals	561 (max) L
Electrical Specifications	Each component requires a separate, dedicated GCFI protected circuit(s)	
Chromatherapy (if selected)	120V 15A 60HZ	

FEATURES, UPGRADES & ACCESSORIES

Material Type: High-Gloss Acrylic

Install Type: Drop-in with wood frame or Undermount

Available Colors: White (W), Almond (A), Oyster (Y), Black (B)

Undermount Cutout Template: DD43000, See below drop-in diagram

Standard (Included) Features: Infinity edge overflow, 2 pillows, chrome twist and turn drain (for alternate finishes, replace with standard parts, 1.5" drain elbow)

Available Control Systems:

Chromatherapy lighting

*Control panel installation is done by installer, location optional

Available Upgrades:

Chromatherapy lighting

Available Accessories:

GD56 Light Chromatherapy Control Kit (for KR00)

GQ88 Light Chromatherapy Add-on Kit

DD50 Replacement Pillow (specify color) 959: White, 958: Almond,

969: Oyster


HB79 Optional wood frame (specify wood) 900: Unfinished, 935: Wenge,

936: Teak

***Faucet installation note:**

Selecting a faucet for rim mounting: The combined thickness at the rim of the bathtub shell and optional wood deck is 2" (50 mm) nominal. The length of the faucet tailpiece(s) must be long enough to extend past this dimension and have ample clearance to assemble any hardware (i.e. locknut, water supply fittings, etc.) necessary for installation. For undermount units, the combined thickness of the bathtub shell is 1/2" (12 mm) nominal and the undermount deck should not exceed the length of the faucet tailpiece(s), including any assembly hardware.


KEY DIMENSIONS

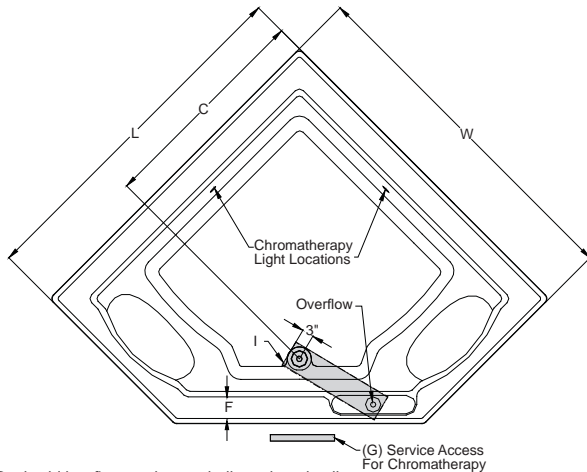



*Deck width reflects only area indicated on detail.

Letter	Description	English	Metric
L	Outer Length	65 3/4"	1670 mm
W	Outer Width	65 3/4"	1670 mm
H	Overall Height**	24"	610 mm
A	Overflow Height	16 13/16"	427 mm
B	Long Edge to Drain Center	12 1/8"	308 mm
C	Short Edge to Drain Center	40 15/16"	1039 mm
D	Drain Shoe Length	9 1/4"	234 mm
E	Deck Height**	4"	102 mm
F	Deck Width*	3 1/2"	89 mm
G	Service Access Dimensions	12" H x 18" L	305 mm x 457 mm
I	Floor Cut-out for Drain	20" x 4"	508 mm x 102 mm


Drop-In Cutout



NOTE: Graphics May Not be to Scale

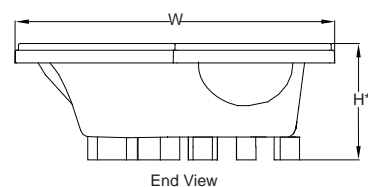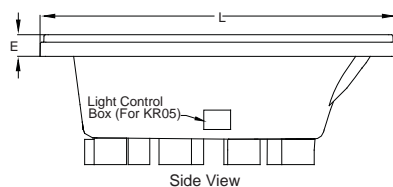

**Height of tub only, optional wood frame adds 1.25"



© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/technicalspecs

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

HD36000 REL 03/10