


12V LED/INCANDESCENT PATH & SPREAD

FUNDAMENTALS™



SIDE MOUNT

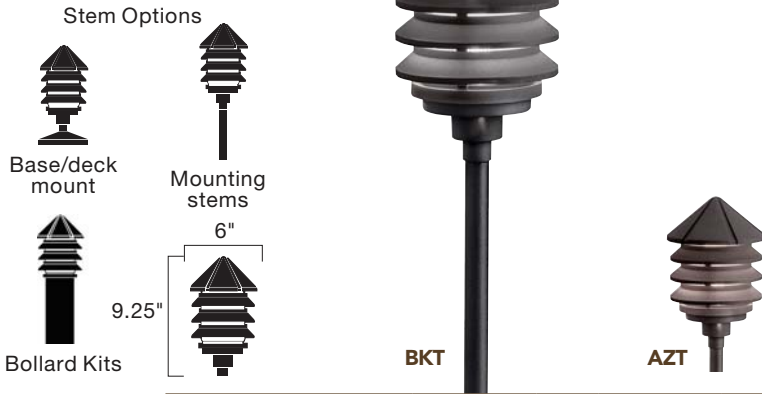

15005 AZT, BKT

15315 AZT, AZT6, BKT

Ordering Guide & Finish	15005 AZT 15005 BKT	15315 AZT – Textured Architectural Bronze 15315 AZT6 – Same as 15315 AZT. Bulk packed in 6. 15315 BKT – Textured Black																																																																																
Housing	Cast Aluminum with molded ribbed diffuser of clear UV stabilized high impact resistant polycarbonate	Cast Aluminum																																																																																
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket																																																																																
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)																																																																																
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)																																																																																
LED Lamp Options	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18036-18038) see page 137. Compares up to 18.5W Krypton.	2W (18122-18123) see page 138. Compares up to 18.5W Krypton.																																																																															
Wiring	52" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	35" of usable #18-2, SPT-1-W leads. Cable connectors supplied.																																																																																
Mounting Access. (Included)	NA	8" In-ground slotted stake and 18" stem																																																																																
Optional Accessories	15656, 15657, 15658 or 15570 – Stems 15575 BK, 15576 BK or 15578 – Stakes 15665, 15666 or 15667 – Bollard 15671 ST – Bollard Template Kit 15601 – Surface Mounting Flange 15602 – Flange Mounting Nipple 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket																																																																																
Integrated LED Option	NA	15815 – on Page 40																																																																																
Notes	Available in stem or deck mount or as a bollard. Mounting stems and bollard kits sold separately. Coordinates with matching deck light 15065 on page 121.	Coordinates with matching deck light 15065 on page 121. 1/2" Bass coupling included.																																																																																
Photometric with Supplied Lamp	<table border="1"> <thead> <tr> <th>Stem Height</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> <th>7'</th> <th>8'</th> <th>9'</th> </tr> </thead> <tbody> <tr> <td>12"</td> <td>2.1</td> <td>.93</td> <td>.67</td> <td>.18</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>18"</td> <td>1.8</td> <td>.73</td> <td>.4</td> <td>.27</td> <td>0.3</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>24"</td> <td>1.2</td> <td>.67</td> <td>.33</td> <td>.35</td> <td>.27</td> <td>.15</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'	12"	2.1	.93	.67	.18	-	-	-	-	-	18"	1.8	.73	.4	.27	0.3	-	-	-	-	24"	1.2	.67	.33	.35	.27	.15	-	-	-	<table border="1"> <thead> <tr> <th>Stem Height</th> <th>1'</th> <th>2'</th> <th>3'</th> <th>4'</th> <th>5'</th> <th>6'</th> <th>7'</th> <th>8'</th> <th>9'</th> </tr> </thead> <tbody> <tr> <td>12"</td> <td>18.7</td> <td>4.3</td> <td>1.4</td> <td>.27</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>18" Supplied</td> <td>15</td> <td>5.2</td> <td>1.8</td> <td>.8</td> <td>.27</td> <td>.03</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>24"</td> <td>11.6</td> <td>5.1</td> <td>2.2</td> <td>.97</td> <td>.48</td> <td>.2</td> <td>.07</td> <td>-</td> <td>-</td> </tr> </tbody> </table>	Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'	12"	18.7	4.3	1.4	.27	-	-	-	-	-	18" Supplied	15	5.2	1.8	.8	.27	.03	-	-	-	24"	11.6	5.1	2.2	.97	.48	.2	.07	-	-
	Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'																																																																								
	12"	2.1	.93	.67	.18	-	-	-	-	-																																																																								
18"	1.8	.73	.4	.27	0.3	-	-	-	-																																																																									
24"	1.2	.67	.33	.35	.27	.15	-	-	-																																																																									
Stem Height	1'	2'	3'	4'	5'	6'	7'	8'	9'																																																																									
12"	18.7	4.3	1.4	.27	-	-	-	-	-																																																																									
18" Supplied	15	5.2	1.8	.8	.27	.03	-	-	-																																																																									
24"	11.6	5.1	2.2	.97	.48	.2	.07	-	-																																																																									