


### Features

- Acrylic
- Pump with air switch and grounding-type plug-in cord
- 8 Kohler jets, color matched
- Integral apron with removable access panel
- In-line heater
- Integral lumbar support and armrests to cradle the body
- Left or right drain
- Textured bottom surface
- Integral tile flange on 3 sides for alcove installation
- 60" (152.4 cm) x 32" (81.3 cm) x 20" (50.8 cm)

### BATH WHIRLPOOL WITH INTEGRAL APRON AND HEATER

## K-1109-HL

ALSO K-1109-HR

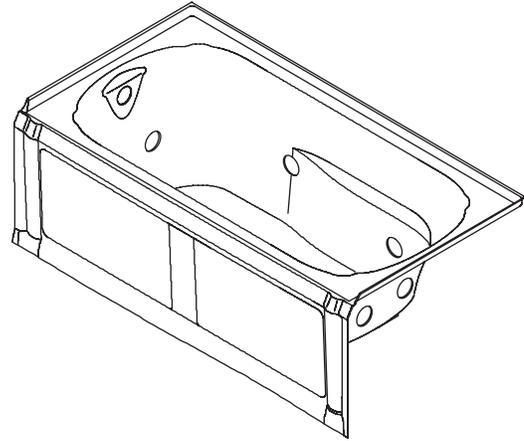

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7M
- ANSI Z124.1.2
- UL 1795

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1109-HL	Bath whirlpool with integral apron and heater – left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1109-HR	Bath whirlpool with integral apron and heater – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
<b>Recommended Accessories</b>			
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other _____
<b>Optional Accessories</b>			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1717	20-minute timer kit	<input type="checkbox"/> NA	

### Product Specification

The acrylic bath whirlpool shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 20" (50.8 cm) in height. Bath whirlpool shall have 8 color matched Kohler jets, a pump with air switch and grounding-type plug-in cord and an in-line heater. Bath whirlpool shall have an integral apron with removable panel for front access, integral tile flange on 3 sides for alcove installation and integral lumbar support and armrests. Bath shall have a left or right drain, and a textured bottom surface. Bath whirlpool shall be Kohler Model K-1109-\_\_\_\_\_-\_\_\_\_\_.

# PORTRAIT® 5'

## Technical Information

Fixture*:	
Basin area:	
Bathing well	42" (106.7 cm) x 20" (50.8 cm)
Top area	51" (129.5 cm) x 24" (61 cm)
Weight	135 lbs (61.2 kg)
To overflow:	
Water depth	14" (35.6 cm)
Capacity	60 gal (227.1 L)
* Approximate measurements for comparison only.	

Pump:		V	Hz	A
1-speed		120	60	7
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

## Required Electrical Service


Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (61 cm) of the pump.	

## Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 50 lbs/square foot (242 kg/square meter) loading.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

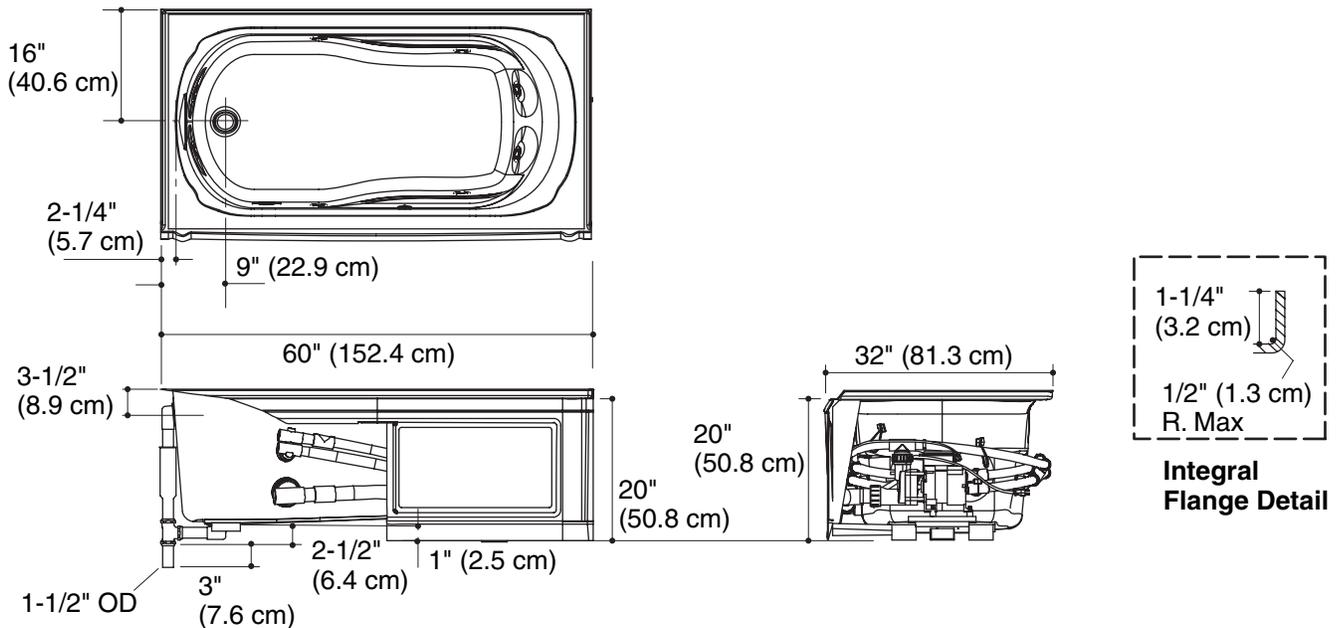

## Product Diagram

PORTRAIT® 5' BATH WHIRLPOOL WITH INTEGRAL APRON AND HEATER

Page 2 of 2  
1022470-4-B

THE BOLD LOOK  
OF **KOHLER**