

# **UNDERTONE**<sub>®</sub>

#### **Features**


- 18-gauge stainless steel
- Under-mount
- Double (large/medium) bowl
- Rounded bowl(s)
- Includes installation hardware
- 7-1/2" (191 mm) deep bowls
- 28-3/4" (730 mm) x 17-7/8" (454 mm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

ASME A112.19.3/CSA B45.4

# **UNDER-MOUNT KITCHEN SINK** K-3354



#### Colors/Finishes

• NA: None applicable

#### **Accessories**

- 0: White
- . CP: Polished Chrome
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description	Со	lors/Finishes
K-3354	Under-mount sink with medium bowl on right	□ NA	
K-3354-L	Under-mount sink with medium bowl on left	□ NA	
Optional Acc	eessories		
K-3278	Hardwood cutting board (for either bowl)	□ NA	
K-3280	Wire basket for large bowl	□ 0	☐ Other
K-3291	Colander for medium bowl	□ 0	☐ Other
K-8801	Duostrainer <sub>®</sub> sink strainer	□ CP	☐ Other
K-8813	Stainless steel sink strainer with tailpiece	□ CP	
K-8814	Stainless steel sink strainer, less tailpiece	□ CP	

## **Product Specification**

The under-mount sink shall be made of 18-gauge stainless steel. Sink shall feature double (large/medium) rounded bowl. Sink shall include installation hardware. Sink bowls shall be 7-1/2" (191 mm) deep. Sink shall be 28-3/4" (730 mm) in length, and 17-7/8" (454 mm) in width. Sink shall be Kohler Model K-3354-

# **UNDERTONE**<sub>®</sub>

## **Technical Information**


<b>Dimensions shown for K-3354;</b> sink dimensions are opposite for K-3354-L.			
Fixture*:			
Left bowl area	14" (356 mm) x 18" (457 mm)		
Water depth	7-1/2" (191 mm)		
Right bowl area	14" (356 mm) x 15" (381 mm)		
Water depth	7-1/2" (191 mm)		
Drain holes	Ø 3-5/8" (92 mm)		
* Approximate measurements for comparison only.			

Included components:			
Hardware kit (4 required)	91915		
Cut-out template (K-3354)	1040558-7		
Cut-out template (K-3354-L)	1024992-7		

### **Installation Notes**

Install this product according to the installation guide.

Allow a minimum of  $2^{\prime\prime}$  (51 mm) clearance around the sink rim for clip attachment.

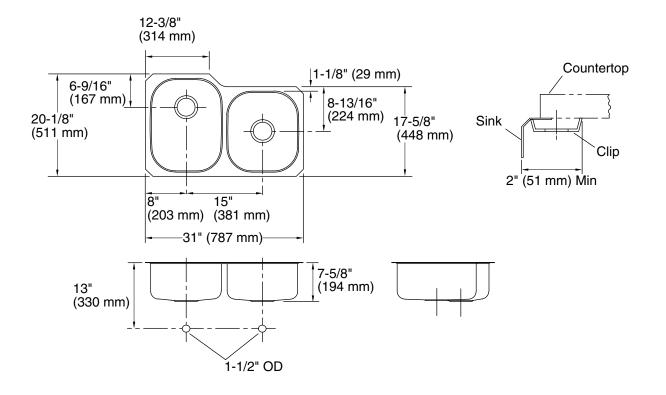

**Product Diagram** 

