

### Features

- Vitreous china.
- Elongated bowl.
- 1-1/2" top spud.
- 10" (254 mm) or 12" (305 mm) rough-in.
- 2-1/4" (57 mm) passageway.
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area.
- 1.6 gpf (6 lpf).
- With bedpan lugs.
- 26" (660 mm) x 14-1/2" (368 mm) x 17-1/2" (445 mm).

### Optional Accessories

- K-13516 Manual 1.6 GPF WC Flushometer
- K-10674-SV WAVE DC 1.6 GPF WC Flushometer
- K-10957-SV Tripoint™ DC 1.6 GPF WC Flushometer
- K-4654-A Commercial Toilet Seat
- K-4670-C Commercial Toilet Seat
- K-4670-CA Commercial Toilet Seat
- K-10674 Wave DC 1.6 GPF WC Flushometer
- K-10957 Tripoint™ DC 1.6 GPF WC Flushometer

### Components

Additional included component/s: Spud, and Bolt cap accessory pack.



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

### KOHLER® One-Year Limited Warranty


See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|  |   |       |
|--|---|-------|
|  | 0 | White |
|--|---|-------|

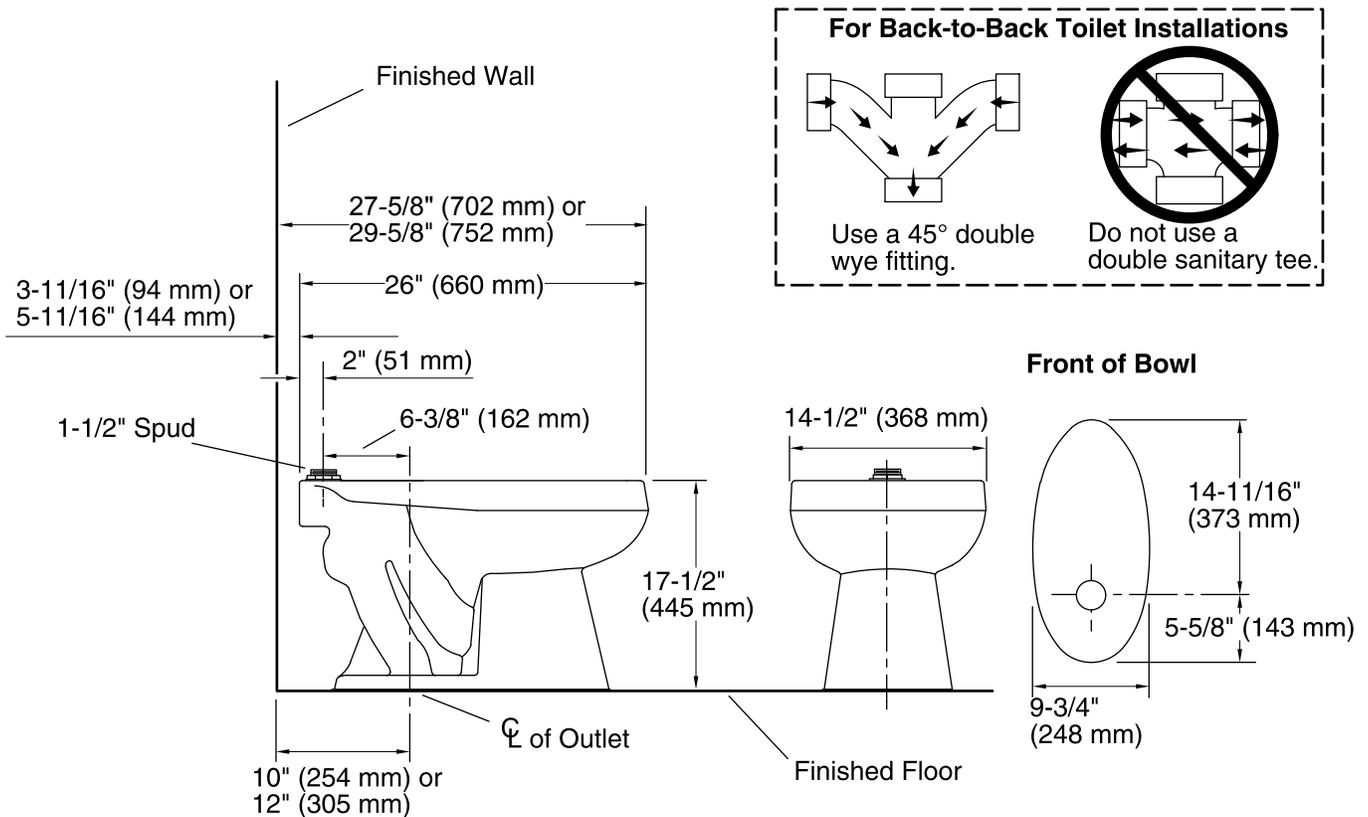

### Technical Information

All product dimensions are nominal.

|                       |                                     |
|-----------------------|-------------------------------------|
| Toilet type:          | Flushometer, Floor-mount            |
| Waste Outlet:         | Floor                               |
| Bowl shape:           | Elongated front                     |
| Spud size:            | 1-1/2", Inlet, Top                  |
| Trap passageway:      | 2-1/4" (57 mm)                      |
| Water surface size:   | 11-3/8" x 10-3/8" (289 mm x 264 mm) |
| Rim to water surface: | 6" (152 mm)                         |
| Rough-in:             | 10" or 12" (254 or 305 mm)          |
| Seat-mounting holes:  | 5-1/2" (140 mm)                     |

### Fixture Supply Requirements

|                       |                    |
|-----------------------|--------------------|
| Min static pressure:  | 35 psi (241.3 kPa) |
| Max static pressure:  | 80 psi (551.6 kPa) |
| Min flowing pressure: | 25 psi (172.4 kPa) |
| Min flow rate:        | 25 gpm (94.6 lpm)  |

### Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flushometer requirements: for 12" (305 mm) rough-in, sweat extension nipple is required.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.