


**DUOSTRAINER®**

**Features**

- Brass construction
- For sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet
- Removable basket strainer with open/close stopper
- 1-1/2" connection

**SINK STRAINER  
K-8801  
ALSO K-8799**

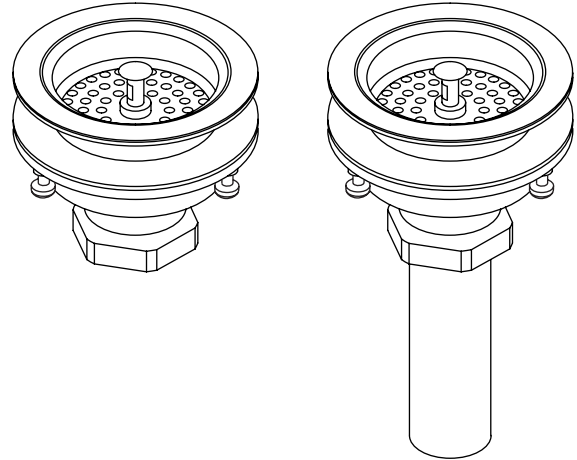

**Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC

**Colors/Finishes**

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

**Specified Model:**

| Model  | Description                  | Colors/Finishes             |                             |                                      |
|--------|------------------------------|-----------------------------|-----------------------------|--------------------------------------|
|        |                              | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other _____ |
| K-8799 | Sink strainer less tailpiece | <input type="checkbox"/> CP | <input type="checkbox"/> PB |                                      |
| K-8801 | Sink strainer with tailpiece | <input type="checkbox"/> CP | <input type="checkbox"/> PB | <input type="checkbox"/> Other _____ |


**PRODUCT SPECIFICATION**

Duostrainer sink strainer shall be of brass construction. Product shall feature removable basket strainer with an open/close stopper, and 1-1/2" connection. Product is intended for sink installations with 3-1/2" (8.9 cm) or 4" (10.2 cm) outlet. Optional feature shall be a brass tailpiece. Strainer shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_.

# DUOSTRAINER®

## Installation Notes

Install this product in accordance with the installation instructions.

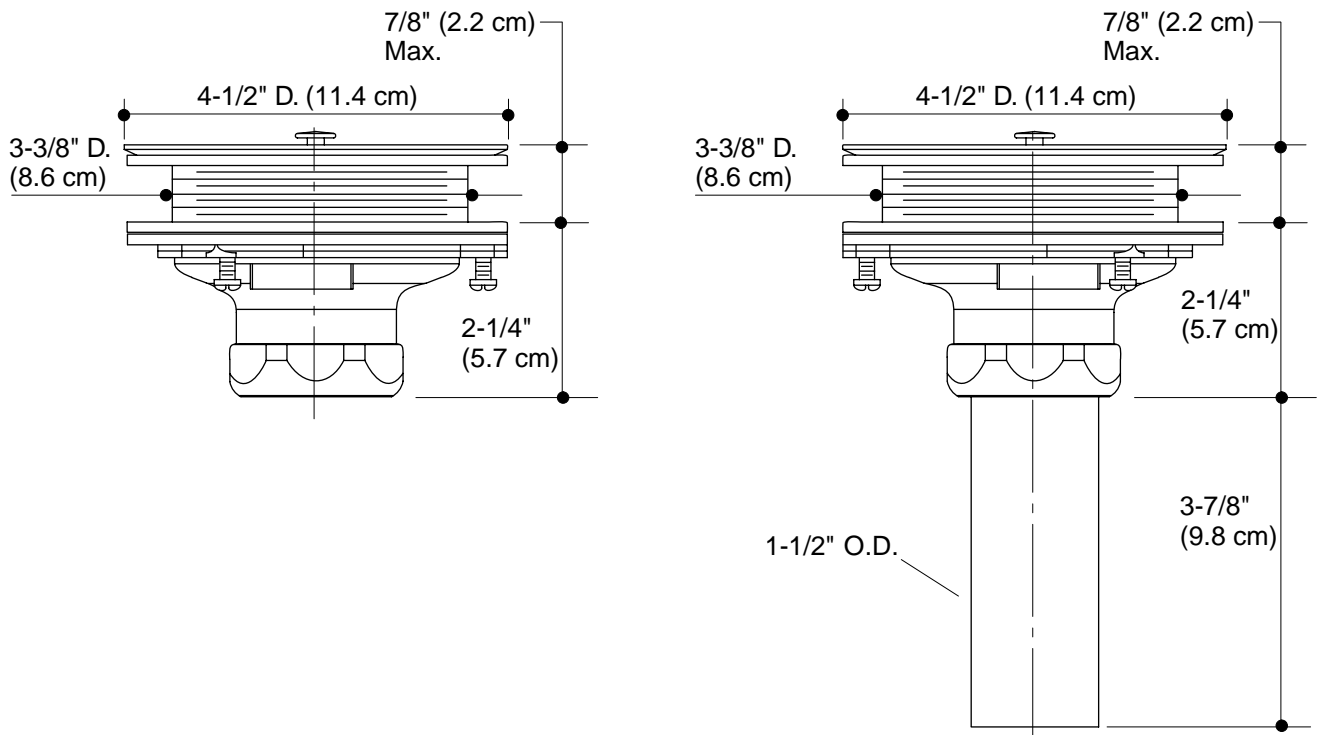


## Product Diagram

**PULL-OUT SPRAY KITCHEN SINK  
FAUCET  
K-15160**

**Features**

- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- Lever or Loop handle
- 9" (22.9 cm) swing spout reach
- Touch control for stream-to-spray water flow
- 2.2 gallons (8.3 L) per minute
- 10" (25.4 cm) escutcheon plate for three-hole installation
- Integral vacuum breaker

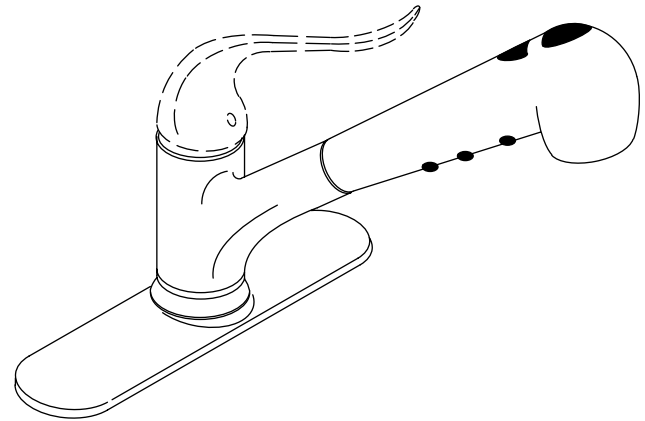

**Codes/Standards Applicable**



Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- Listed in the State of Wisconsin
- ADA

**Colors/Finishes**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

**Specified Model**

| Model      | Description  |  |  |
|------------|--|---|---|
| K-15160    | Faucet with lever handle and matching color sprayhead              | <input type="checkbox"/> CP   | <input type="checkbox"/> Other  |
| K-15160-AP | Faucet with lever handle, Polished Chrome body and White sprayhead | <input type="checkbox"/> CP   |   |
| K-15160-L  | Faucet with loop handle and matching color sprayhead               |   | <input type="checkbox"/> CP <input type="checkbox"/> Other                            |
| K-15160-LA | Faucet with loop handle, Polished Chrome body and White sprayhead  |   | <input type="checkbox"/> CP   |

**Product Specification**

Single-control pull-out spray kitchen sink faucet shall be of metal construction. The valve shall be a one-piece, self-contained ceramic disc valve, and allows both volume and temperature control. The valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting, and includes a high-temperature limit stop. Product shall include 9" (22.9 cm) swing spout with integral sprayhead and hose, lever or loop handle, integral vacuum breaker, and 10" (25.4 cm) escutcheon plate. Faucet shall be Kohler Model K-15160-\_\_\_\_\_-\_\_\_\_\_.

# CORALAIS®

## Technical Information

| Applicable Faucet:         | Lever Handle | Loop Handle  |
|----------------------------|--------------|--------------|
| Chrome body/Chrome spray   | K-15160-CP   | K-15160-L-CP |
| Chrome body/White spray    | K-15160-AP   | K-15160-LA   |
| Black body/Black spray     | K-15160-7    | K-15160-L-7  |
| White body/White spray     | K-15160-0    | K-15160-L-0  |
| Almond body/Almond spray   | K-15160-47   | K-15160-L-47 |
| Biscuit body/Biscuit spray | K-15160-96   | K-15160-L-96 |


Handles are ADA compliant. ADA

## Installation Notes

Install this product according to the installation guide.

This product meets all local plumbing codes for vacuum breaker requirements.

All necessary parts included for both single-hole and three-hole installation.

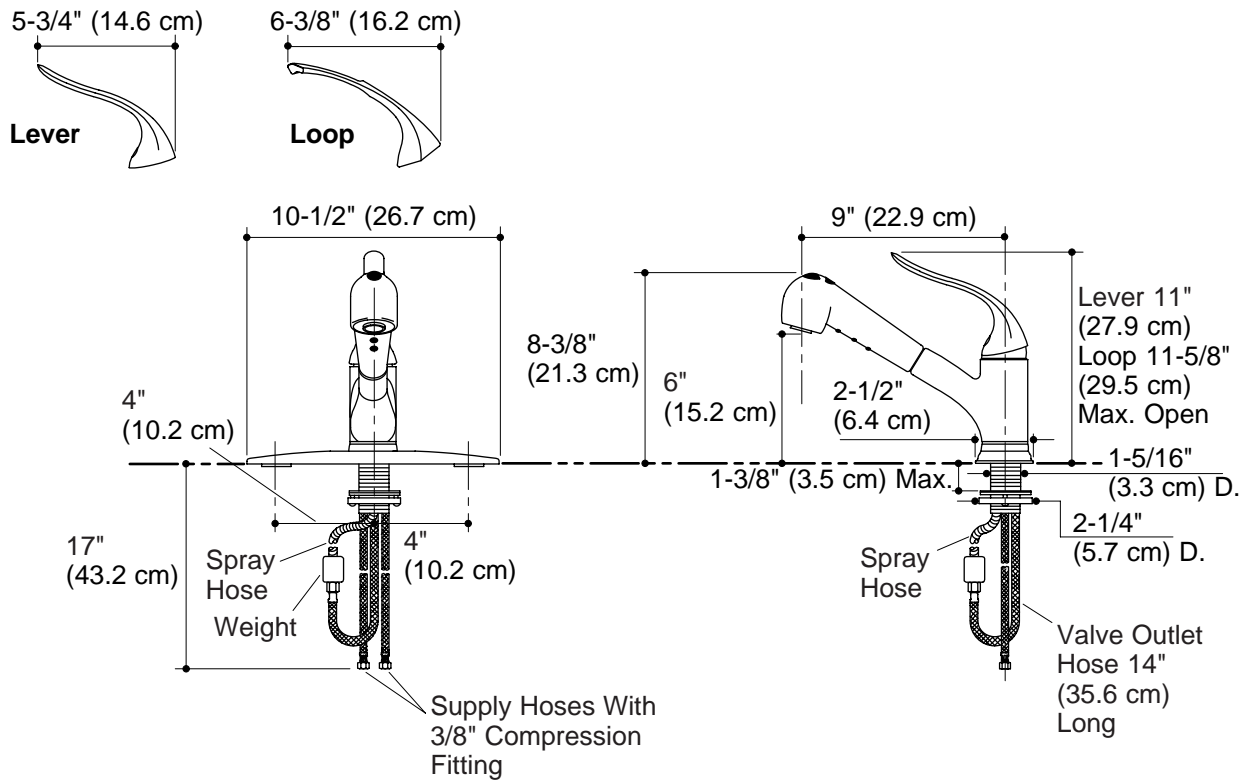

## Product Diagram