

Features


- Acrylic
- Freestanding bath
- Two-piece design
- Contemporary straight apron
- Integral molded lumbar supports at both ends for comfort
- Center drain
- Textured bottom surface
- 72" (1829 mm) x 36" (914 mm) x 25-3/4" (654 mm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

CSA B45.5/IAPMO Z124

FREESTANDING BATH WITH STRAIGHT APRON K-6366



Colors/Finishes

- 0: White
- 96: Biscuit

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

| Model | Description | Colors/ | Colors/Finishes | |
|--|--|----------------------|--------------------------|--|
| K-6366 | Freestanding bath with straight apron | □ 0 | □ 96 | |
| Recommer | nded Accessories | · | | |
| K-7265 | Toe-tap bath drain - with brass tee and pipe OR | □ CP | ☐ Other | |
| K-37385 | PVC cable bath drain - less tee and pipe | | □ NA | |
| Required T K-T37391 | Frim (for K-37385 Cable Bath Drain Only) Cable bath drain trim - Basic Rotary OR | □ CP | □ Other | |
| | ` | | | |
| | Crim (for K-37385 Cable Bath Drain Only) Cable bath drain trim - Basic Rotary OR Cable bath drain trim - Contemporary Rotary OR | □ CP | | |
| K-T37391 | Cable bath drain trim - Basic Rotary OR | | ☐ Other ☐ Other | |
| K-T37391 K-T37392 | Cable bath drain trim - Basic Rotary OR Cable bath drain trim - Contemporary Rotary OR | □ CP | □ Other | |
| K-T37391 K-T37392 K-T37393 | Cable bath drain trim - Basic Rotary OR Cable bath drain trim - Contemporary Rotary OR Cable bath drain trim - Traditional Rotary OR | □ CP | ☐ Other | |
| K-T37391 K-T37392 K-T37393 K-T37394 | Cable bath drain trim - Basic Rotary OR Cable bath drain trim - Contemporary Rotary OR Cable bath drain trim - Traditional Rotary OR Cable bath drain trim - Victorian Rotary OR | □ CP □ CP □ CP | ☐ Other☐☐ Other☐☐ Other☐ | |

Product Specification

The freestanding bath shall be made of acrylic. Bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 25-3/4" (654 mm) in height. Bath shall be two-piece design and includes contemporary straight apron. Bath features integral molded lumbar supports at both ends for comfort. Bath shall have a center drain and features textured bottom surface. Freestanding bath shall be Kohler Model K-6366-____.

Technical Information

| Fixture*: | | | | |
|---|----------------------------------|--|--|--|
| Bathing well: | | | | |
| Basin area, bottom | 24-1/2" (622 mm) x 50" (1270 mm) | | | |
| Basin area, top | 27-1/2" (699 mm) x 61" (1549 mm) | | | |
| Weight | 152 lbs (68.9 kg) | | | |
| To overflow: | | | | |
| Water depth | 17" (432 mm) | | | |
| Capacity | 90 gal (341 L) | | | |
| * Approximate measurements for comparison only. | | | | |
| | | | | |

Installation Notes

Install this product according to the installation guide.




CAUTION: Risk of personal injury. Obtain sufficient help to carefully lift or move the bath.


This bath is designed for freestanding installation only. Do not support the load weight of the bath by the rim.


Floor support under bath must provide for a minimum of 80 lbs/square foot (390.6 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

No change in measurements if connected with drain illustrated. (K-7265)



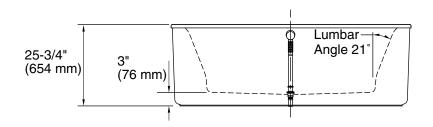



Product Diagram

