

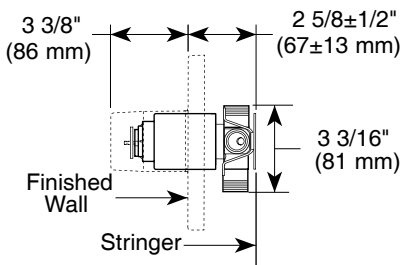





PTR188700-UN

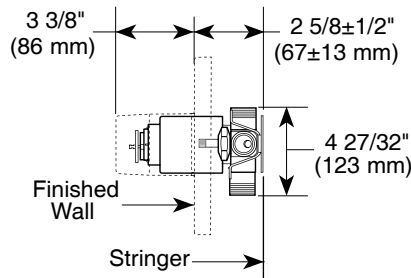




PTR188700-UNWS



PTR188700-IP

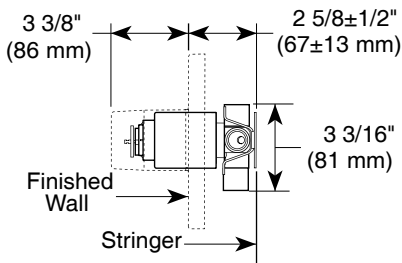

PTR188700-IPWS

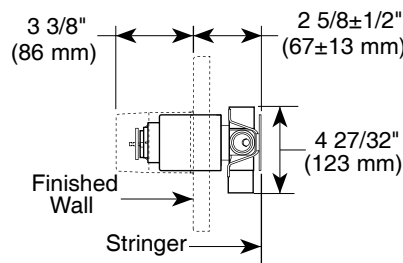

PTR188700-UN
PTR188700-UNWS
PTR188700-IP
PTR188700-IPWS

Rough-In:

PTR188700-UN

Male thread without stops

PTR188700-UNWS

Male thread with stops

PTR188700-IP

Female thread without stops

PTR188700-IPWS

Female thread with stops

STANDARD SPECIFICATIONS

- Pressure Balance Valve Body
- Back-to-back installation capability.
- Cartridge utilizes integral check valves to prevent the cross flow of water within the valve. Valve reduces the flow of water to 5 GPM within 5 seconds of the complete loss of pressure in the cold water supply line. Outlet water temperature is maintained within $\pm 3^\circ$ variation with changes in either hot or cold supply of up to 50 percent of the normal supply pressure. Temperature is controlled by handle with cold water always coming on first.
- Forged brass body.
- Field adjustable means to limit handle rotation into hot water zone.
- Temperature control to rotate a maximum of 120° from full cold to the maximum temperature.
- Single Handle
- Temperature Only Controlled with Handle

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, Commercial and Business applications.



COMPLIES WITH:

- ASME A1 12.18.1 / CSAB125.1
- ASSE 1016

