




Indoor

52" Ceiling Fan
Air Pro
Energy Star

Ceiling Fan

Catalog No.	Finish								Dimensions (Inches)			
	Brushed Nickel	Antique Bronze	Cobble- Stone	Mill- stone	Gilded Iron	Forged Bronze	Antique Nickel	Corinthian Bronze	A	B	C	D
P2521	-09	-20	-33	-40	-71	-77	-81	-93	52	14-5/8	11-9/16	11-3/4
Blades												
Side 1	White	Medium Cherry	Honey Pine	Medium Oak	Classic Walnut	Classic Walnut	Medium Oak	Dark Teak				
Side 2	Natural Cherry	Classic Walnut	Medium Cherry	Light Oak	Dark Cherry	Medium Cherry	Cherry	Medium Cherry				

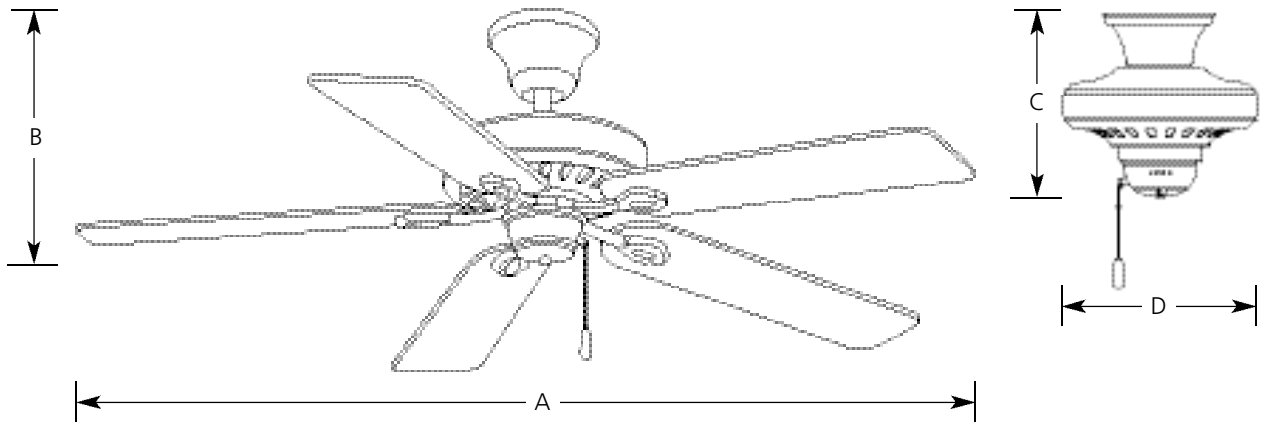

Specifications:

General

- Energy Star certified
- 30 year limited warranty

Blades

- Five blades
- Reversible
- 12 degree pitch
- Sure Connect blade attachment system
 - Screws preinstalled in blades for attachment to motor arms
 - Special guides align blades to motor arms
 - Preinstalled rubber isolation pads minimize vibration noise
- Plywood blade construction

Motor

- Triple capacitor speed control; manual reverse control
- 153mm dia x 18mm high
- Pull chain on brushed nickel (-09) is chrome with a white fob, gilded iron (-71) and antique nickel (-81) is antique brass with a black fob, and all the rest have antique brass chains with walnut fob's.

Mounting

- Dual ceiling mounting use with downrod or install close to ceiling
- Quick Install canopy
 - Installs without removing J-box screws
 - Holds fan for wiring during installation
 - Dual-mount for downrod or close to ceiling mounting
- A 3/4" x 4-1/2" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch)
- Oversized, textured die cast hanger ball reduces noise and wobble vibrations
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- Mounting hardware is included

Electrical

- 80" lead wires included
- Prewired

Labeling

- CUL listed



Progress Lighting
 701 Millennium Blvd.
 Greenville, South Carolina
 29607