


Type \_\_\_\_\_  
-60 -68  
P7396

Catalog No.	Diffuser		Lamping	Dimensions (Inches)		
	White Ribbed	Clear Prismatic		A	B	C
P7396	-60	-68	2-13w Twin CF (2-pin)	10-1/2	10-1/2	4

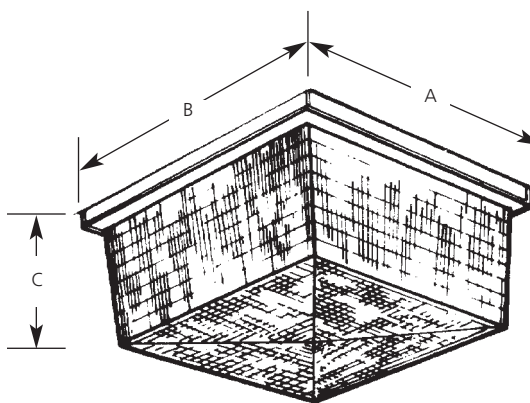

**Specifications:**

General

- White pre-painted steel back plate
- UV stabilized polycarbonate diffuser (see "options" below)
- Diffuser completely covers back plate - flush to ceiling or wall
- Diffuser held in place with stainless steel tamper proof screws
- Complies with "Americans with Disabilities Act" - ADA

Mounting

- Ceiling or wall mounted
- Covers any outlet box
- Mounting strap for outlet box provided for center lock up mounting

Options

- White Ribbed diffuser - specify suffix "60"
- Clear Prismatic diffuser - specify suffix "68"

Electrical

- GX23 base sockets
- 120V NPF ballasts
  - HPF available on request
- Minimum start temperature + 32° F

Labeling

- UL-CUL wet location listed