

# Regal® Prison Model Flushometer

# 611



## ► Description

Concealed Water Closet Flushometer for wall hung stainless steel back inlet bowls.

## ► Flush Cycle

- Model 611 Water Saver (3.5 gpf/13.2 Lpf)
- Model 611-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

## ► Specifications

Quiet, Concealed, Diaphragm Type, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- Vandal Resistant Metal Direct Acting Push Button
- 1" I.P.S. Wheel Handle Bak-Chek™ Angle Stop
- Adjustable Tailpiece
- Vacuum Breaker
- Elbow Flush Connection and Coupling for 1½" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Exposed parts Chrome Plated
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Push Button and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by Para -Flo™ Technology
- Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX™ Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2, and Military Specification V-29193.

## ► L Dimension

Specify the "L" Dimension for the proper length of the Push Button Assembly. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾".



## ► Variations

- AFD** Shorter Vacuum Breaker — for use with Anti-Flood Device (Anti-Flood Device NOT provided by Sloan)  
*Not required for use with Bradley Flood Buster®*
- ES** Solenoid Operated (specify 24 VAC or 120 VAC)
- ESM** Solenoid Operated with Modular Plug for use with Sloan PWT Systems (24 VAC only)
- TP** Trap Primer
- WB** For installation with Sloan Easy Access® Wall Box
- YB** Sweat Solder Adapter

► For Hydraulic Operation, use Flushometer Model 9603.

► Prison Flushometers can also be provided in Royal® and Naval® Models. All rough-in dimensions remain the same.

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

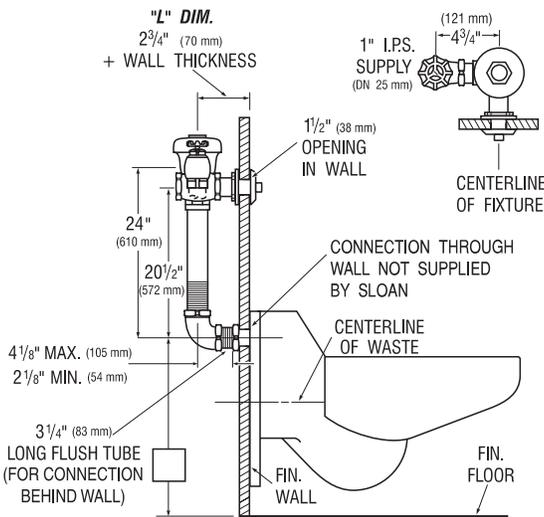

This space for Architect/Engineer approval

Job Name \_\_\_\_\_ Date \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Customer/Wholesaler \_\_\_\_\_

Contractor \_\_\_\_\_

Architect \_\_\_\_\_

The information contained in this document is subject to change without notice.

