

Location:



Tub-Shower & Hand Shower System 5506

Specification Submittal



Feature Highlights

- Symmons Tub-Shower & Hand Shower System with lever handles
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon
- Separate triple outlet diverter valve with lever handle
- Showerhead #552SH three mode, 4 inch diameter
- Showerhead mounting bracket and flange
- Wall/hand shower #552HS, three mode with 5 foot flexible metal hose, dual checks, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Tub spout, #552TS
- Polished chrome finish (standard)

Model Numbers

- ☐ 5506
Tub-Shower and Hand Shower System with Symmons Temptrol® mixing valve, p/n 4000-BODY and triple outlet diverter, p/n 4-460E-BODY
- ☐ 5506-TRM
Trim only, valve and diverter ordered separately
- ☐ 4000-BODY
Symmons Temptrol® mixing valve without trim
- ☐ 4000-X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service
- ☐ 4-460E-BODY
Symmons triple outlet diverter valve without trim

Finish Options / Modifications

Append appropriate -suffix to model number

- ☐ -STN Satin Nickel
- ☐ -SBZ Seasoned Bronze
- Polished Chrome (standard finish)

Standards / Certifications

ASME A112.18.1; CSA B125.1

Americans with Disabilities Act (ADA) compliant

Options / Modifications


Append appropriate -suffix to model number

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Integral service stops included with Temptrol mixing valve to allow water shut-off for service, p/n 4000-X-BODY (*Option only applies when ordering model 5506*)
- ☐ -CHKS Check Stops: Temptrol® mixing valve includes integral check stops (*Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.*)
- ☐ -REV Reverse core: Temptrol® mixing valve with reverse core. (*Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left*)
- ☐ -2.0 2.0 gpm (7.6 L/min) flow rate restrictor
- ☐ -1.5 1.5 gpm (5.7 L/min) flow rate restrictor
- ☐ -L/HD Showerhead not included (*includes showerhead arm and flange only*)
- ☐ L/HS Hand Shower wand not included (*includes hose, in-line vacuum breaker, wall connections and flange only*)
- ☐ -552HSB 30" slide bar in place of wall cradle on hand shower units
- ☐ -48 48 inch slide bar instead of 30 inch when ordering 552HSB Hand Shower
- ☐ -72 6 foot flexible metal hose in place of 5 foot
- ☐ -R60 5 foot vinyl hose in place of flexible metal hose
- ☐ -R72 6 foot vinyl hose in place of flexible metal hose
- ☐ -QD Quick-disconnect at hand shower wall connection

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions

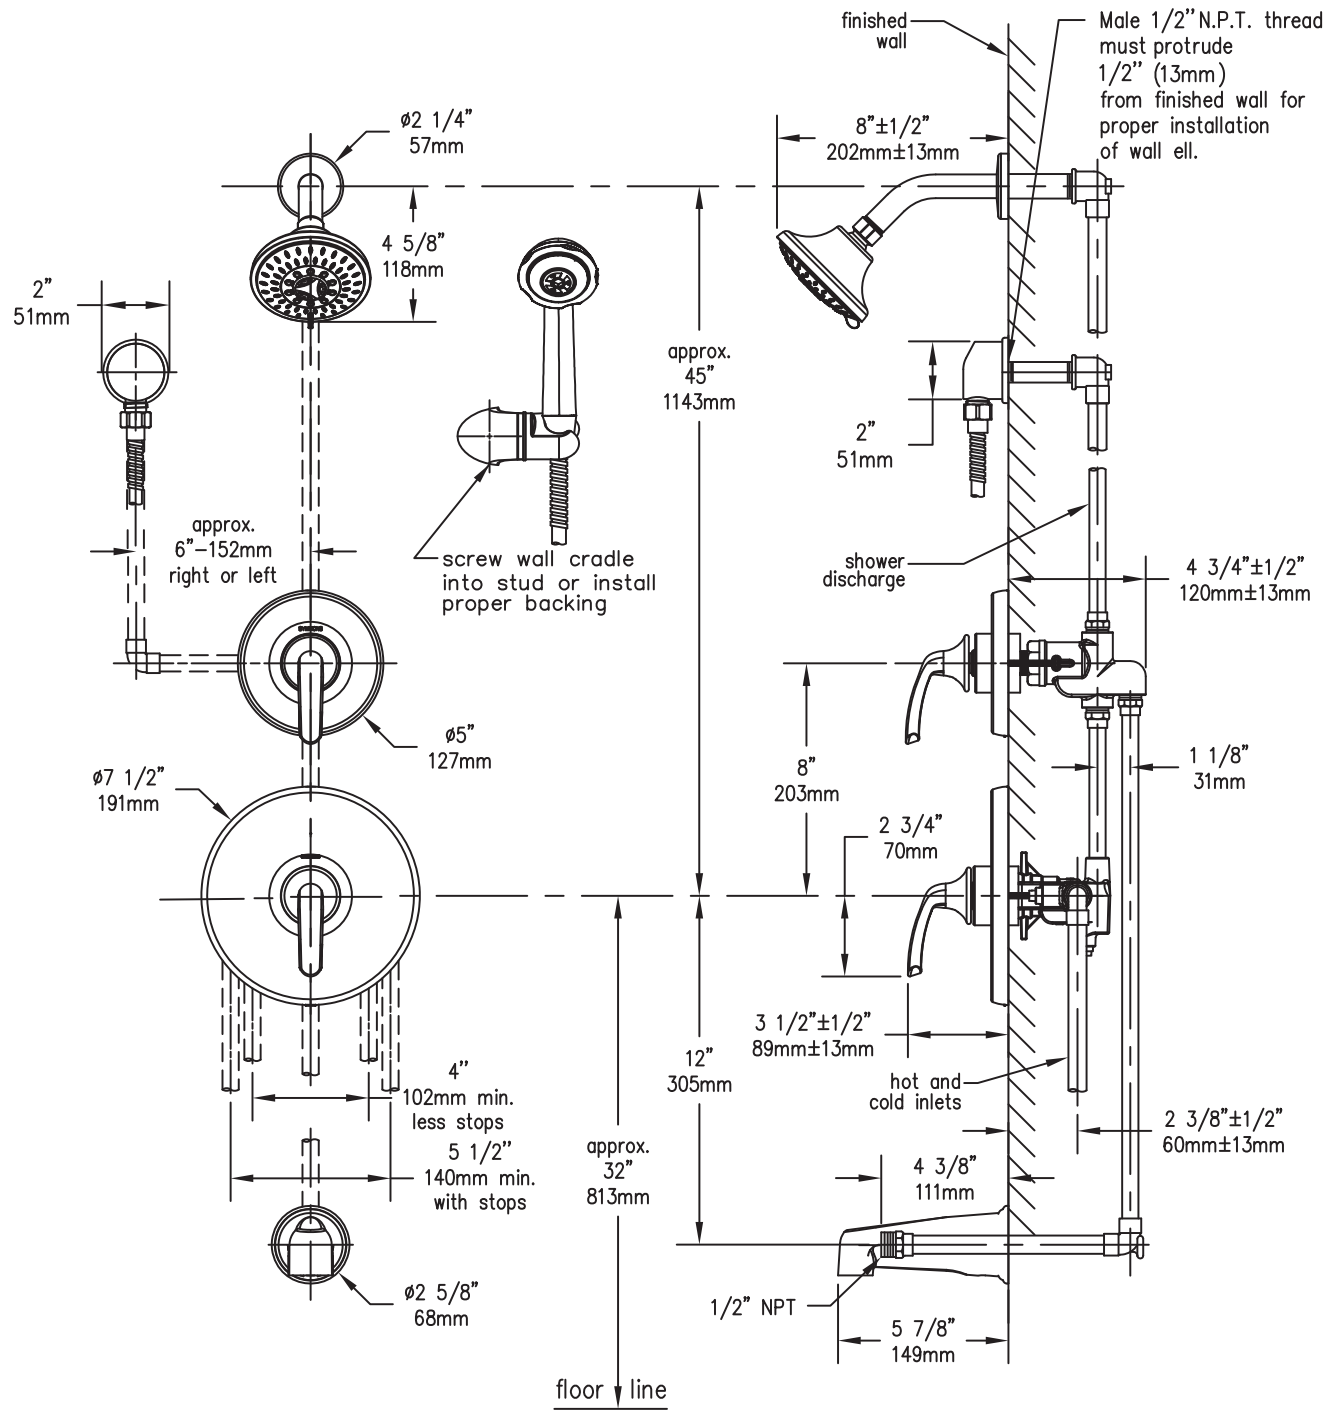

Note: Dimensions subject to change without notice