

Location:

SYMMONS® Safetymix®

Shower System with Hand Shower 1-117-FS Specification Submittal



Feature Highlights

- Symmons tub and shower system with a lever handle
- Symmons Safetymix pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Super showerhead, single mode with adjustable flood or mist spray, #4-231
- Lever diverter with volume control for showerhead and hand shower, #2DIV-BODY
- 1 mode hand shower (white finish), with flexible 5 foot metal hose and inline vacuum breaker, #FS
- Wall hook for mounting hand shower
- Standard flow rate 2.5 gpm (9.5 L/min)
- Polished chrome finish

Model Numbers

- 1-117-FS Shower System with Hand Shower and Symmons Safetymix pressure balancing mixing valve.

Finish Options

Append appropriate -suffix to model number

- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1/CSA B125.1



Warranty


- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number.

- CG** -1.5 1.5 gpm (5.7 L/min) flow restrictor
- 2.0 2.0 gpm (7.6 L/min) flow restrictor
- 72 72" hose in place of 60" hose
- 150 1 mode showerhead, with 1/2" sweat connection
- ADAHS 1 mode white hand shower unit with non-positive shut-off button in place of standard hand shower unit
- B30 30" adjusting bar in place of wall hook
- B48 48" adjusting bar in place of wall hook
- BX Back connection with integral stops
- E External volume control on showerhead
- G Dial thermometer
- L/HD Less showerhead
- NU NU-Arm head bracket in place of 300 arm and flange
- CG** -NS Non-shared diverter valve
- QD Quick disconnect
- R 72" white vinyl hose in place of 60" metal hose
- T24 24" grab bar in place of standard hand shower unit (with white hand shower wand)
- T36 36" grab bar in place of standard hand shower unit (with white hand shower wand)
- T48 48" grab bar in place of standard hand shower unit (with white hand shower wand)
- VB Elevated vacuum breaker with wall flanges in place of in-line vacuum breaker
- VP Vandal resistant escutcheon screws in place of standard screws
- X Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations
- X-3/4" 3/4" valve to increase flow approximately 20%
- X-CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

Dimensions *Safetymix Tub and Shower System, 1-117-FS*

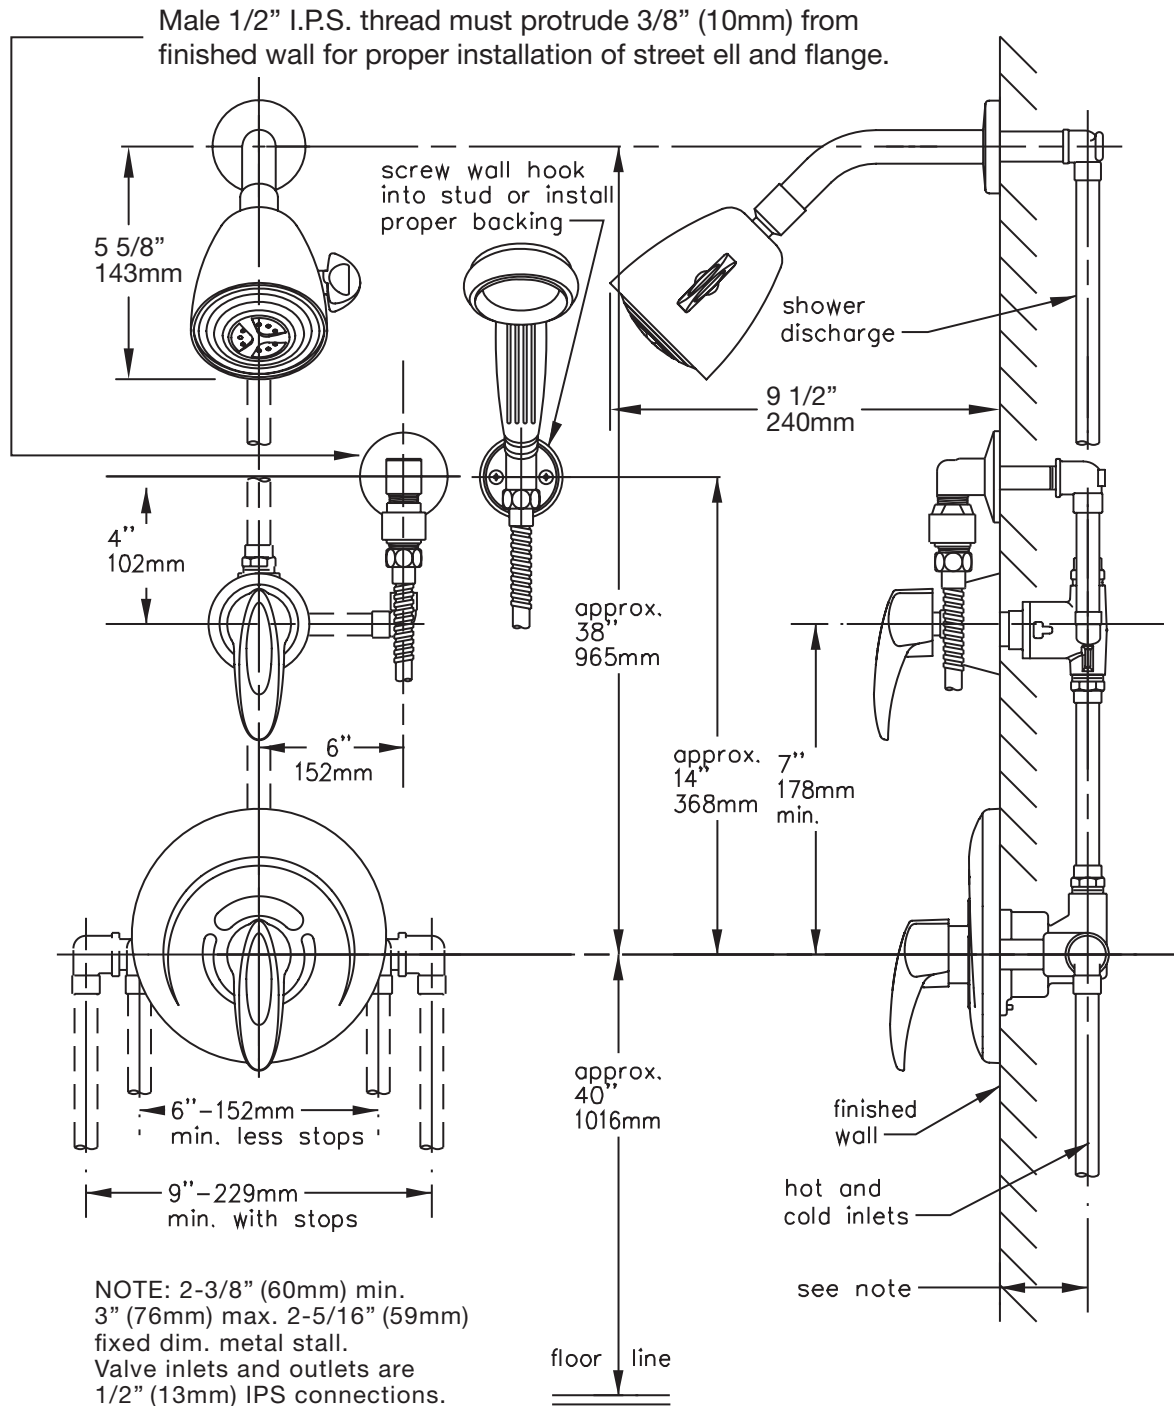

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
Phone: (800) 796-6667 ■ Fax: (800) 961-9621
Website: symmons.com ■ Email: gethelp@symmons.com

Copyright © 2019 Symmons Industries, Inc. ■ ZV-1449 REV F ■ 011119

SYMMONS[®]
the smart choice™