

ABA774L/ABA744R

Carrollton™ 6' Air Bathtub

TOTO® USA, INC. has merged heated air and water to create the ultimate in bathing luxury:

The TOTO® CarrolltonTM Air Bath

The TOTO® CarrolltonTM Air Bath will provide the bather a soothing, relaxing and refreshing repose uniquely different than any other bath-time experience. The cast-acrylic CarrolltonTM Air Bath has smooth lines and a deep bathing well which is accented with a chrome plated solid brass grab bar and 16 individual air jets. The individualized check valve system allows the bather to use soaps, bath oils, salts and other bathing essentials without harming the performance of the air system.



ABA774L - Carrollton™ 6' Air Bathtub

- 72" x 42" x 22"
- Luxuriously deep Bathing Well
- Cast-acrylic construction provides years of durability
- Slip-resistant surface
- 1 hp Ultra-quiet Blower
- 300 watt Heated Air Injection System
- Final purge/drying cycle to clean each air jet
- Chrome Plated Solid Brass
 Grab Bar
- Multi functional Keypad
 Normal Mode 5 Intensity Levels For
 Continuous Operation
 Pulsating Mode -

Alternating between the High/Low Intensity levels for Massage

Oscillation Mode -

Alternating between all 5 Intensity levels for Massage

■ ABA774L

Acrylic bathtub. Slip-resistant surface. Left keypad/right blower

■ ABA774R

Acrylic bathtub. Slip-resistant surface. Right keypad/ left blower

Colors:

Standard #01 Cotton

#12 Sedona Beige

Grab Bar Chrome

Jet Trim Chrome with color matched

air jets

ABA774L/ABA774R

Carrollton™ 6' Air Bathtub

STYLE

Designed to match the our line of residential bathroom products, TOTO's® tubs complete any bathroom suite. Cast acrylic construction provides the ultimate in strength and durability, while a slip-resistant surface enhances safety in the bath.

■ SPECIFICATIONS

Size: 72"L x 42"W

Depth: 22"

Warranty: 5 Year Limited Warranty

on Acrylic Tub

1 Year Limited Warranty on Components and Parts

Material: Cast Acrylic

Electrical Requirements:

15 AMP; 120V w/GFI

Shipping Weight:

ABA774L/ABA774R

140 lbs.

Shipping Dimensions:

ABA774L/ABA774R

76"L x 45"W x 24"H

Gallons: ABA774L/ABA774R

130 to overflow


50 min. operational capacity



Fixture meets ANSI/ASME standard Z124.1, IAPMO/UPC, and CSA requirements.

These dimensions and specifications are subject to change without notice.

Use TOTO[®] *cut template to assure rough in dimensions.*

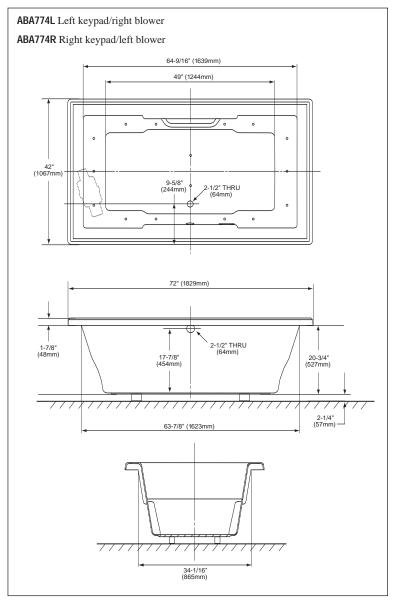

ABA774R - Carrollton™ 6' Air Bathtub



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 9/04 #D50210