

NEOREST®

MS980CMG

Neorest 550 Elongated Toilet/Bidet

FEATURES

- Cyclone® siphon jet flushing system, low consumption (1.05GPF/4.0LPF and 1.6GPF/6.0LPF)
- SanaGloss® ceramic glaze - SanaGloss glaze prevents debris, and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Auto lid open/close, auto flush
- Convenient remote control
- Adjustable heated seat
- Adjustable spray position
- Washlet with three wash modes (front, rear, soft)
- Oscillating and pulsing comfort washing
- Energy saver timer
- Built-in air purifying system

MODELS

- MS980CMG
With SanaGloss ceramic glaze

COLORS/FINISHES

- #01 Cotton
- #11 Colonial White
- #12 Sedona Beige

PRODUCT SPECIFICATION

The Neorest 550 uses our Cyclone flushing system toilet shall be 1.02GPF/4.0LPF and 1.6GOF/6.0LPF. Toilet shall have SanaGloss ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat. Toilet shall be TOTO Model MS980CMG_____.



SanaGloss

CYCLONE®
FLUSHING SYSTEM BY TOTO

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), Intertek, State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others



MS980CMG

Neorest 550 Elongated Toilet/Bidet

SPECIFICATIONS

Water Use: 1.6 Gpf/6.0 Lpf with alternate 1.05 Gpf/4.0 Lpf

Flush System: Cyclone Siphon Jet

Water Supply: Min 8.7gal/min (33L/min) before installation
Max 80PSI (0.55MPa) static

Water Surface: 10-13/16" x 8-7/16"

Trap Diameter: 2-1/8" (54 mm)

Rough In: 12" rough in
Warning: If there is a base board in the restroom, the center of the floor drain should be a minimum of 12" from the base board.

Trap Seal: 2-7/16" (62 mm)


Warranty: Three Year Limited (Residential)
One Year Limited (Commercial)

Material: Bowl: Vitreous china
Seat and cover: Plastic

Shipping Weight: 112 lbs.

Shipping Dimensions: 21" x 31" x 34"

Accessories: Sound Experience - THU9201
Connection Unit - THU9202#XX

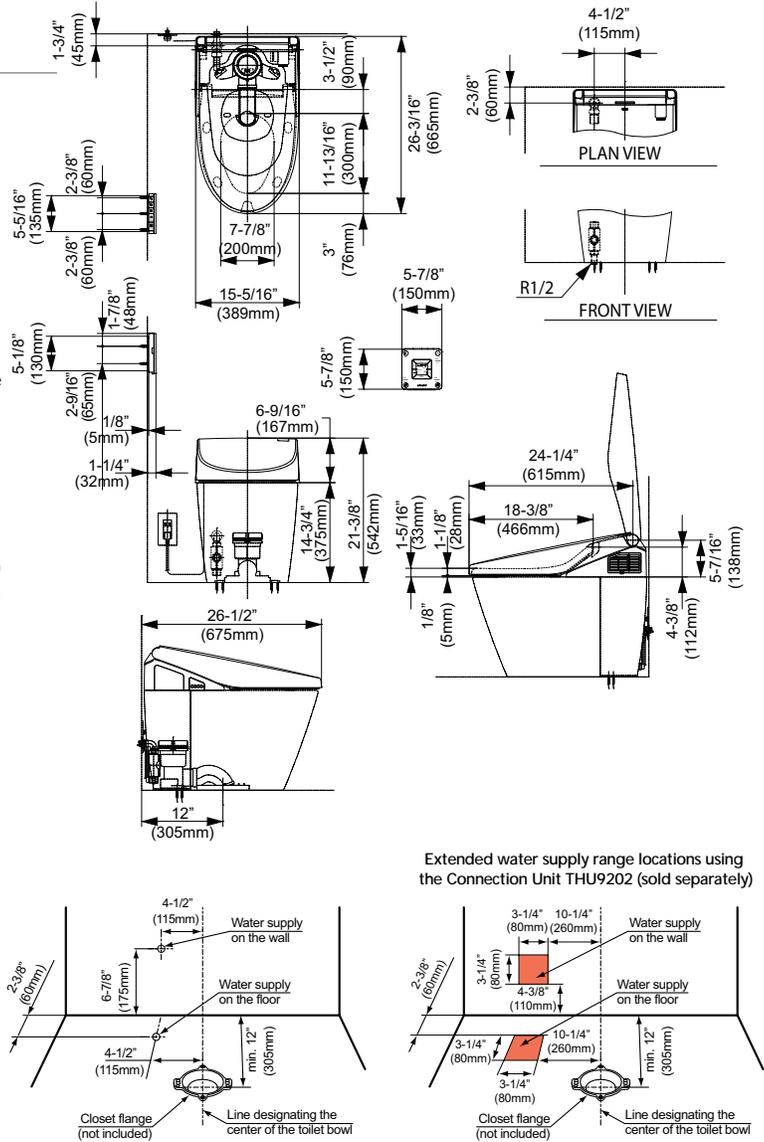

Power Rating: 120V AC, 60 Hz, 1281W

Power Cord: Maximum length: 3 ft (914 mm)

Water Feature: Adjustable Water Flow Rate
Rear washing: from 9.1 to 14.5 oz/min.
Soft washing: from 9.1 to 14.5 oz/min.
Front washing: from 9.8 to 14.5 oz/min.

Temperature of Washing Spray
Minimum: 86° F/30° C
Maximum: 104° F/40° C

Safety Features: Temperature fuse, Bi-metal sensor (auto reset), and Float switch (prevent boil)

Drying Feature: Air Temperature:
High: About 138°F/59°C
Medium: About 122°F/50°C
Low: About 104°F/40°C

Capacity of Air: 10.6 ft³/min
Safety Feature: Temperature Fuse

Seat Warming Feature: Surface Temperature:
Minimum: 82° F/28° C
Maximum: 97° F/36° C

Seat Heater Capacity: 50W

Safety Feature: Thermal fuse

Air Purifying Feature: Method: 0 Deodorizer
Air Volume: 5.5 ft³/min

Water Supply Pressure: Minimum: 20PSI (0.14MPa) flowing @ 5.3gal/min (20L/min)
Max 108PSI (0.75MPa) static

Ambient Temperature Range: 33°F/1°C to 104°F/40°C

Size: 15.3" x 25.2" x 21.3"

Weight: Net: 82.7 lbs.



These dimensions and specifications are subject to change without notice