# Nexus® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

### **FEATURES**

- Durable brass construction
- · Washerless ceramic disk valve cartridge
- Accommodates 8" -16" spread
- Metal pop-up waste assembly
- Water saving 1.5 gpm



#### COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel
- #PN Polished Nickel

# CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF 61-9
- Certifications: IAPMO (cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB1953 & Vermont S.152
- ADA compliant







### PRODUCT SPECIFICATION

The two-handle lavatory faucet shall have durable brass construction, ceramic disk valve cartridges and be compliant with California AB1953 & Vermont S.152. Product shall be for 8 to 16 inch installations and shall have a maximum flow rate of 1.5 gallons per minute. Product shall also include pop-up drain. Product shall be TOTO Model TL794DDLQ\_\_\_\_.

# Nexus® Widespread Lavatory High-Efficiency Faucet, 1.5 gpm

# **SPECIFICATIONS**

• Warranty Lifetime Limited Warranty


(Residential Use)


One Year (Commercial Use)

Material BrassShipping Weight 8.6 lbs.

Shipping Dimensions 14-1/4"L x 12-1/4"W x 2-3/4"H

Maximum Flow Rate 1.5 gpm (5.7 lpm)

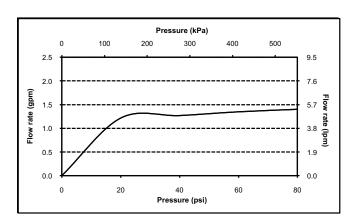

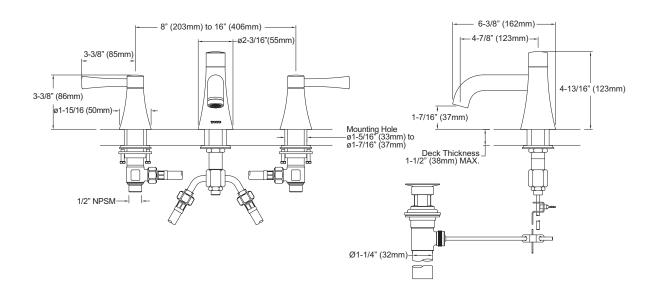

These dimensions and specifications are subject to change without notice