


# 12V TAPER™ DECK SCONCE



- + DIMMABLE
- + MOUNTS FLUSH ON A SURFACE
- + RATED FOR INDOOR/OUTDOOR USE
- + ADA COMPLIANT
- + EASE OF INSTALLATION
- + EXCELLENT FORWARD AND DOWNWARD LIGHT DISTRIBUTION
- + 2700K




**1553 SW**  
12V TAPER™ DECK SCONCE  
4½" W, 3" H, 1⅛" EXT.

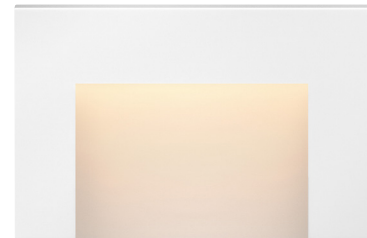

**1553 SW**  
(SIDE VIEW)

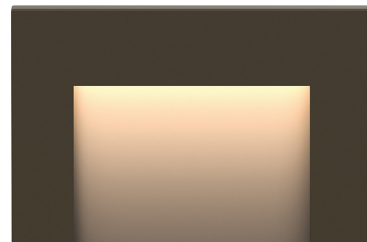


**1553 BZ**  
12V TAPER™ DECK SCONCE  
4½" W, 3" H, 1⅛" EXT.

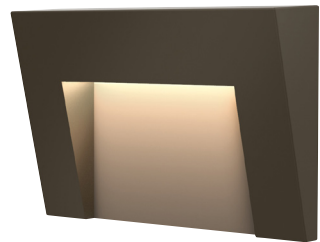


**1553 BZ**  
(SIDE VIEW)

## DESIGN NOTE


Seamlessly blending into architectural elements inside or outside the home, Taper beautifully illuminates stairs, walkways, or patio spaces to enhance the outdoor lighting experience.

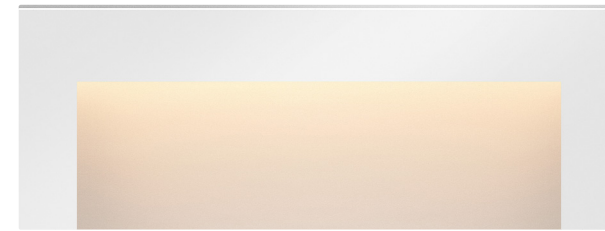


**1557 SW**  
12V TAPER™ DECK SCONCE  
8" W, 3" H, 1⅛" EXT.



**1557 SW**  
(SIDE VIEW)

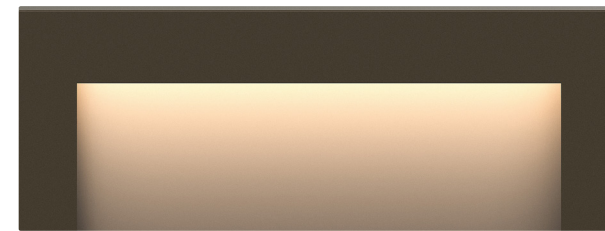

**1557 BZ**  
12V TAPER™ DECK SCONCE  
8" W, 3" H, 1⅛" EXT.

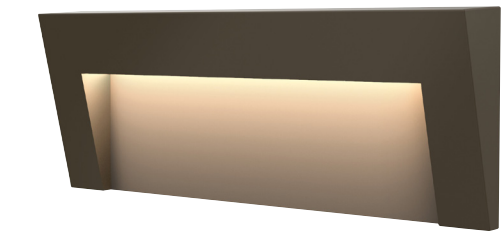

**1557 BZ**  
(SIDE VIEW)

LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
<b>1553 BZ</b>	TP15	1.9w / 2.3VA	15w	Bronze	Cast Aluminum	Etched
<b>1553 SW</b>	TP15	1.9w / 2.3VA	15w	Satin White	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

### PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	12" Mounting	1553 BZ	8.3	1.294	0.358	0.136	0.039	0.007				
	18" Mounting		10.64	1.989	0.555	0.218	0.076	0.029	0.004			
	12" Mounting	1553 SW	18.63	3.261	0.787	0.342	0.127	0.084	0.037	0.01		
	18" Mounting		12.6	3.62	1.461	0.644	0.309	0.189	0.103	0.067	0.032	0.003

LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
<b>1557 BZ</b>	TP25	2.5w / 3.0VA	25w	Bronze	Cast Aluminum	Etched
<b>1557 SW</b>	TP25	2.5w / 3.0VA	25w	Satin White	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

### PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)



DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	12" Mounting	1557 BZ	12.23	1.138	0.204	0.045						
	18" Mounting		10.46	2.113	0.655	0.212	0.064	0.026	0.011			
	12" Mounting	1557 SW	26.13	4.221	1.019	0.44	0.23	0.123	0.079	0.03	0.015	0.004
	18" Mounting		25.39	6.48	2.22	0.737	0.383	0.224	0.108	0.095	0.051	0.001




**1551 SW**  
12V TAPER™ DECK SCONCE  
4½" W, 8" H, 1⅜" EXT.




1551 SW  
(SIDE VIEW)

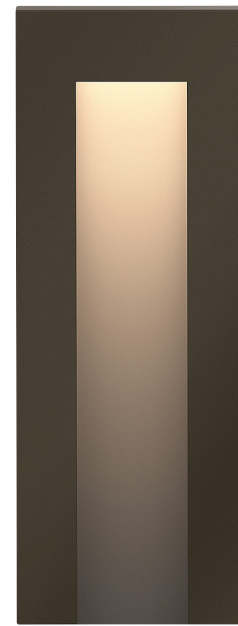

**1551 BZ**  
12V TAPER™ DECK SCONCE  
4½" W, 8" H, 1⅜" EXT.

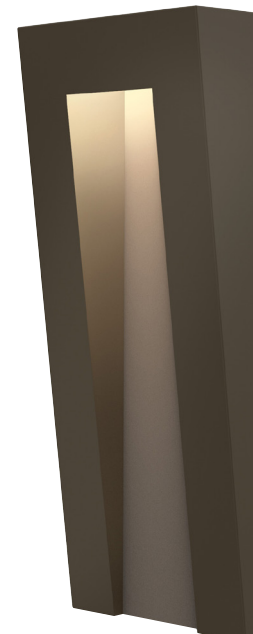



1551 BZ  
(SIDE VIEW)




**1556 SW**  
12V TAPER™ DECK SCONCE  
3" W, 4½" H, 1⅜" EXT.




1556 SW  
(SIDE VIEW)

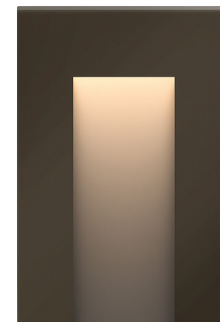

**1556 BZ**  
12V TAPER™ DECK SCONCE  
3" W, 4½" H, 1⅜" EXT.

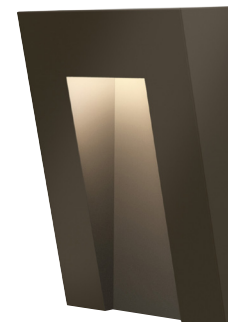

1556 BZ  
(SIDE VIEW)



LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
1551 SW	TP10	1.2w / 1.5VA	10w	Satin White	Cast Aluminum	Etched
1556 SW	TP10	1.2w / 1.5VA	10w	Satin White	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

**PHOTOMETRICS** (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	18" Mounting	1551 SW	10.13	3.334	1.228	0.49	0.23	0.112	0.07	0.035	0.024	0.002
	36" Mounting		3.35	2.104	1.205	0.665	0.383	0.245	0.165	0.117	0.075	0.045
	12" Mounting	1556 SW	15.83	2.39	0.73	0.28	0.114	0.053	0.019			
	18" Mounting		7.67	2.79	0.838	0.415	0.199	0.106	0.054	0.001		

LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
1551 BZ	TP10	1.2w / 1.5VA	10w	Bronze	Cast Aluminum	Etched
1556 BZ	TP10	1.2w / 1.5VA	10w	Bronze	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

**PHOTOMETRICS** (BASED ON VARIOUS MOUNTING HEIGHTS)


DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'
FOOT CANDLES	18" Mounting	1551 BZ	7.6	2.243	0.557	0.209	0.076	0.025			
	36" Mounting		3.113	1.636	0.849	0.419	0.252	0.118	0.059	0.032	0.007
	12" Mounting	1556 BZ	7.86	0.941	0.18	0.055	0.003				
	18" Mounting		5.12	1.291	0.332	0.117	0.05	0.008			

# 12V TAPER™ STEP LIGHT


- + DIMMABLE
- + EXCELLENT FORWARD AND DOWNWARD LIGHT DISTRIBUTION
- + RATED FOR INDOOR/OUTDOOR USE
- + 2700K
- + EASE OF INSTALLATION

## DESIGN NOTE



Seamlessly blending into architectural elements inside or outside the home, the Taper series beautifully illuminates stairs, walkways, or patio spaces to enhance the outdoor lighting experience.

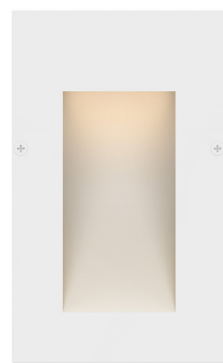



**1562 SW**  
12V TAPER™ STEP LIGHT  
3" W, 5" H

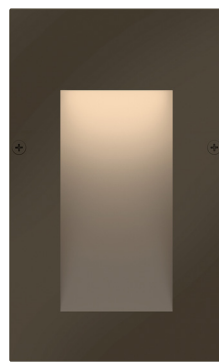


**1562 BZ**  
12V TAPER™ STEP LIGHT  
3" W, 5" H

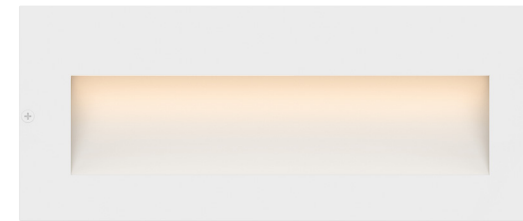


**1565 SW**  
12V TAPER™ STEP LIGHT  
8" W, 3 1/4" H

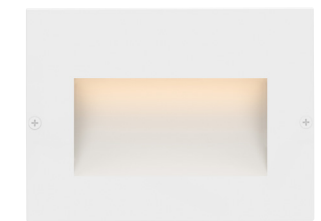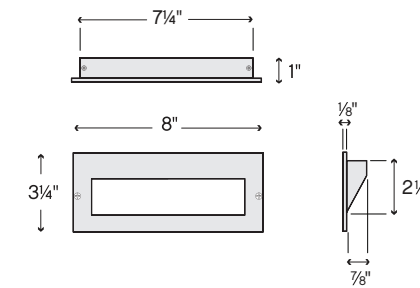

**1563 SW**  
12V TAPER™ STEP LIGHT  
4 1/2" W, 3 1/4" H

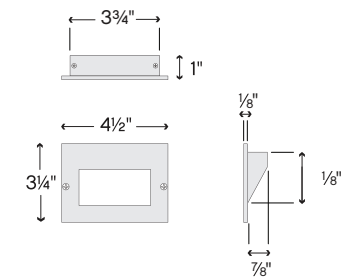

**1565 BZ**  
12V TAPER™ STEP LIGHT  
8" W, 3 1/4" H

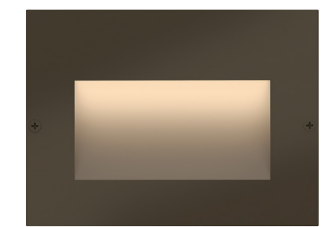

**1563 BZ**  
12V TAPER™ STEP LIGHT  
4 1/2" W, 3 1/4" H

LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
1562 BZ	TP10	1.2w / 1.5VA	10w	Bronze	Cast Aluminum	Etched
1562 SW	TP10	1.2w / 1.5VA	10w	Satin White	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

### PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'
FOOT CANDLES	12" Mounting	1562 BZ	6.82	1.291	0.284	0.103	0.024	0.007			
	18" Mounting		5.31	1.257	0.121						
	12" Mounting	1562 SW	13.11	12.604	0.85	0.367	0.181	0.1	0.035	0.023	0.006
	18" Mounting		0.442	0.01							

LED ITEM	LED ENGINE (INCLUDED)	MAX. WATTAGE/ VOLT AMPS	INCANDESCENT EQUIVALENCY	FINISH	CONSTRUCTION	LENS
1563 BZ	TP15	1.9w / 2.3VA	15w	Bronze	Cast Aluminum	Etched
1563 SW	TP15	1.9w / 2.3VA	15w	Satin White	Cast Aluminum	Etched
1565 BZ	TP25	2.5w / 3.0VA	25w	Bronze	Cast Aluminum	Etched
1565 SW	TP25	2.5w / 3.0VA	25w	Satin White	Cast Aluminum	Etched

A wiring kit is supplied. For coordinating Taper lanterns, see [hinkleylighting.com](http://hinkleylighting.com). For accessories, see pages 102-103. For transformers, see pages 100-101.

### PHOTOMETRICS (BASED ON VARIOUS MOUNTING HEIGHTS)

DISTANCE FROM LIGHT		LED ITEM	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
FOOT CANDLES	12" Mounting	1562 BZ	6.82	1.291	0.284	0.103	0.024	0.007				
	18" Mounting		5.31	1.257	0.121							
	12" Mounting	1562 SW	13.11	12.604	0.85	0.367	0.181	0.1	0.035	0.023	0.006	
	18" Mounting		0.442	0.01								
	12" Mounting	1563 BZ	10.6	1.381	0.371	0.13	0.005					
	18" Mounting		9.1	2.49	0.682	0.265	0.107	0.003				
	12" Mounting	1563 SW	16.86	4.31	1.088	0.806	0.301	0.225	0.15	0.054	0.031	0.025
	18" Mounting		12.75	4.07	2.326	0.86	0.363	0.244	0.16	0.082	0.053	0.035