



Installation Instructions WGH/WGC Mid-Size Series



WGH

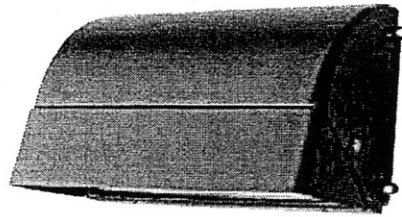

WGC

READ THOROUGHLY BEFORE INSTALLING

WARNING: TO REDUCE FIRE AND SHOCK HAZARD:

- -INSTALLATION AND SERVICING SHOULD BE DONE BY QUALIFIED PERSONNEL.
- -DISCONNECT POWER BEFORE STARTING INSTALLATION OR PERFORMING SERVICING.
- -INSTALL AND MAINTAIN TO MEET APPLICABLE CODES.
- -INSURE FIXTURE AND WIRING ARE PROPERLY GROUNDED.
- -READ LAMP MANUFACTURER WARNING NOTICE ON LAMP CARTON BEFORE HANDLING OR INSTALLING. DO NOT INSTALL A DAMAGED LAMP.

Unthread two captive lens frame-retaining screws and remove lens frame from housing. Then loosen reflector screw and remove reflector and barrier. After fixture installation, replace barrier and reflector.

A. For Direct Mounting over Existing Flush Junction Box

1. Drill or knockout 5/16" dia. holes in 3 bosses provided on casting backside. Drill or knockout 9/16" dia. access hole. CAUTION: Use round file to deburr access hole. Always remove metal chips from inside of fixture.
2. Provide matching threaded holes in mounting surface using template provided.
3. Position fixture and use 1/4" dia. screws to secure fixture to wall.
4. Wire fixture to service and ground fixture with provided ground wire.
NOTE: Wire connections must be within the junction box.
5. Provide a watertight seal between the fixture and the building structure by using a silicone sealant.

B. For Direct Mounting (without Junction Box)

1. Drill or knockout 5/16" dia. holes in bosses provided on casting backside.
CAUTION: Always remove metal chips from inside of fixture.
2. Provide matching threaded holes in mounting surface using template provided.
3. Secure fixture to mounting surface using 1/4" dia. screws and thread conduit to one or both sides of fixture. Use sealant on threads.
4. Make necessary wiring connections and also ground fixture with ground wire provided. Keep all wire connections inside fixture housing.
5. Provide a watertight seal between the fixture and the building structure by using a silicone sealant.

