

REFLEX PRO – model: LED27

LEDme® Track Luminaire

WAC LIGHTING

Responsible Lighting®



PRODUCT DESCRIPTION

High performance and precise thermal management with robust die-cast construction makes this luminaire perfect for general, accent and wall wash applications in residential and commercial environments. For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

Fixture Type:


Catalog Number:

Project:

Location:

FEATURES

- Energy Star® rated
- Accepts one lens/accessory
- 360° horizontal rotation
- 180° vertical aiming
- Free of projected heat, UV and IR radiation
- Replaceable LED module
- 100,000 hour rated life

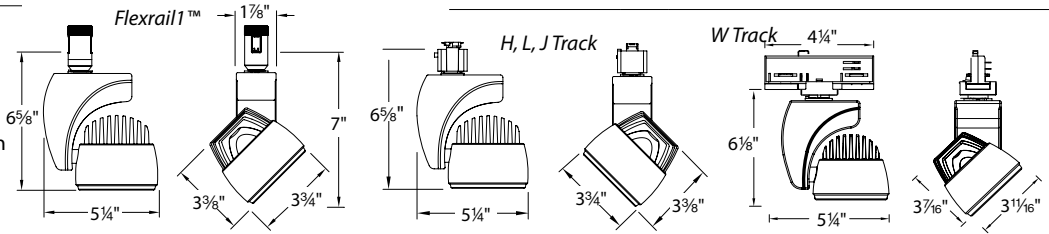

SPECIFICATIONS

Construction: Die-cast aluminum.


Driver: 120VAC or 277VAC 50/60Hz, 700mA current. High power factor >0.9. Max Load: 27W.

Dimming: Not dimmable.

Light Source: Cree LED.

Standards: ETL & cETL Listed.

FINISHES

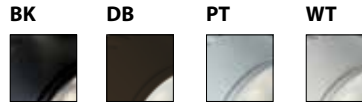

REPLACEMENT MODULE

RM-11X3-27	2700K
RM-11X3-30	3000K
RM-11X3-35	3500K
RM-11X3-40	4000K

FIXTURE PERFORMANCE

Model	Beam	Input	CCT	Lumens					Efficacy (Lm/W)					CBCP				
				BK	BN	WT	PT	DB	BK	BN	WT	PT	DB	BK	BN	WT	PT	DB
LED27S-27	20°	120V	2700K	1310	1390	1490	1415	1325	50 Lm/W	53 Lm/W	57 Lm/W	54 Lm/W	51 Lm/W	6145	6060	6490	6680	6400
LED27F-27	40°			1105	1210	1350	1190	1095	43 Lm/W	47 Lm/W	52 Lm/W	46 Lm/W	42 Lm/W	1820	1860	1880	1795	1820
LED27S-30	20°	120V	3000K	1290	1310	1385	1320	1240	50 Lm/W	50 Lm/W	53 Lm/W	51 Lm/W	48 Lm/W	6890	6570	6930	6950	6413
LED27F-30	40°			1280	1415	1585	1395	1295	49 Lm/W	54 Lm/W	61 Lm/W	54 Lm/W	50 Lm/W	2110	2175	2205	2100	2150
LED27S-35	20°	120V	3500K	1465	1510	1615	1535	1465	56 Lm/W	58 Lm/W	62 Lm/W	59 Lm/W	56 Lm/W	7425	6930	7735	7675	7595
LED27F-35	40°			1350	1510	1690	1490	1370	52 Lm/W	58 Lm/W	65 Lm/W	57 Lm/W	53 Lm/W	2220	2305	2320	2230	2280
LED27S-40	20°	120V	4000K	1475	1510	1625	1530	1475	57 Lm/W	58 Lm/W	63 Lm/W	59 Lm/W	57 Lm/W	7960	7400	8285	7910	8095
LED27F-40	40°			1440	1590	1785	1570	1450	55 Lm/W	61 Lm/W	69 Lm/W	60 Lm/W	56 Lm/W	2370	2440	2445	2360	2400
LED27S-27	20°	277V	2700K	1360	X	1515	1435	X	52 Lm/W	X	58 Lm/W	55 Lm/W	X	6770	X	7290	7100	X
LED27F-27	40°			1285	X	1575	1390	X	49 Lm/W	X	61 Lm/W	53 Lm/W	X	1795	X	1845	1790	X
LED27S-30	20°	277V	3000K	1275	X	1390	1320	X	49 Lm/W	X	53 Lm/W	51 Lm/W	X	6685	X	6495	6595	X
LED27F-30	40°			1285	X	1575	1390	X	49 Lm/W	X	61 Lm/W	53 Lm/W	X	2110	X	2195	2105	X
LED27S-35	20°	277V	3500K	1465	X	1615	1535	X	56 Lm/W	X	62 Lm/W	59 Lm/W	X	7425	X	7735	7675	X
LED27F-35	40°			1350	X	1690	1490	X	52 Lm/W	X	65 Lm/W	57 Lm/W	X	2220	X	2320	2230	X
LED27S-40	20°	277V	4000K	1475	X	1625	1530	X	57 Lm/W	X	63 Lm/W	59 Lm/W	X	7960	X	8285	7910	X
LED27F-40	40°			1440	X	1785	1570	X	55 Lm/W	X	69 Lm/W	60 Lm/W	X	2370	X	2445	2360	X

ORDER NUMBER

Track System	Model	Watt	Beam	Color Temp	Finish
H H Track	LED27	27W	S 20° F 45°	27 2700K	BK Black
L L Track				30 3000K	BN Brushed Nickel
J J/J2 Track				35 3500K	WT White
WTK W Track 120V				40 4000K	BK Black
WHK W Track 277V				PT Platinum	WT White
HM1 Flexrail™					DB Dark Bronze
					PT Platinum

LENSES & ACCESSORIES

Model	Color	Model	Finish
LENS-25	AMB Amber	FR	Frosted Lens
	BLU Blue		SPR Spread Lens
	GRN Green		BEL Beam Elongating Lens
	RED Red		
	YEL Yellow		



Example: WHK-LED27-35-WT

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center


1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


REFLEX – model: LED27
 Photometrics - 3000K - White Finish

WAC LIGHTING
 Responsible Lighting®


20° Beam Angle - 120V Input

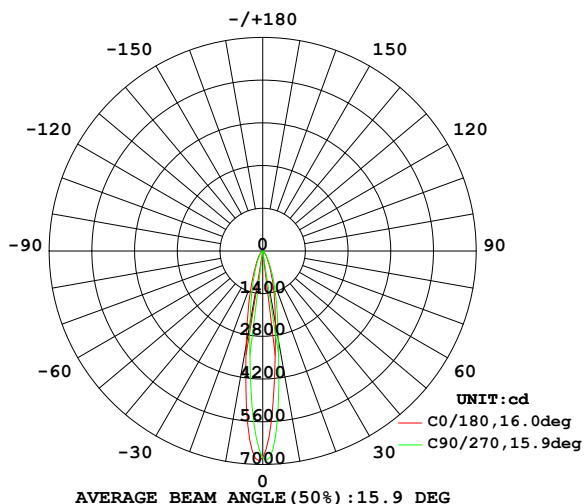


45° Beam Angle - 120V Input

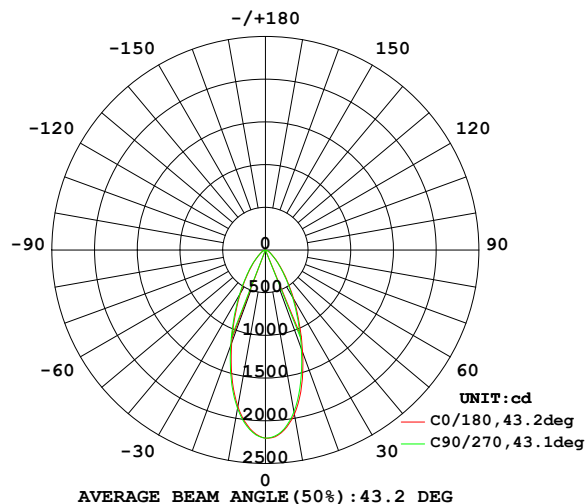

20° Beam Angle - 277V Input

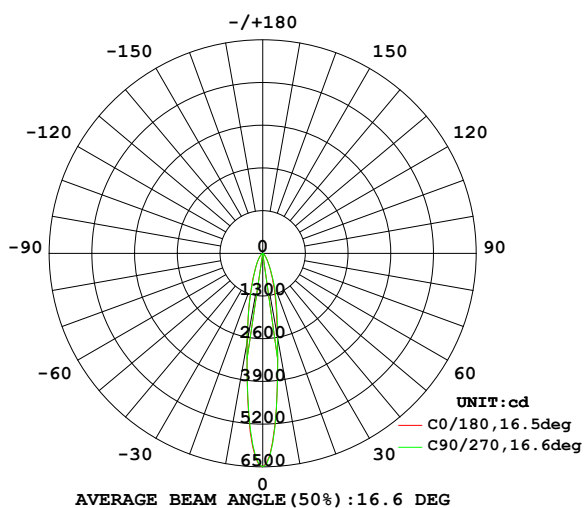

45° Beam Angle - 277V Input

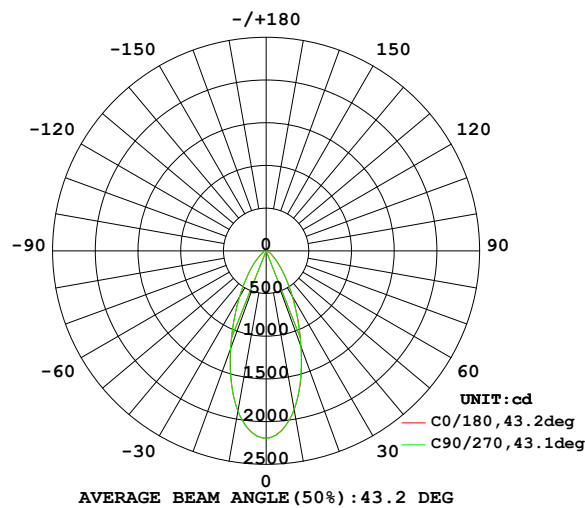

WAC Lighting
 www.waclighting.com
 Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive • Port Washington, NY 11050
 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
 1750 Archibald Avenue • Ontario, CA 91760
 Phone (800) 526.2588 • Fax (800) 526.2585