




# LEDRA® CHROMA PENDANTS



CHROMA II  
I37 215bz  
I37 215mc



CHROMA HOUSTON  
I37 200bz  
I37 200ch  
I37 200mc



CHROMA TITAN  
I37 205bz  
I37 205ch  
I37 205mc



# INSTALLATION INSTRUCTIONS

Fig 1.


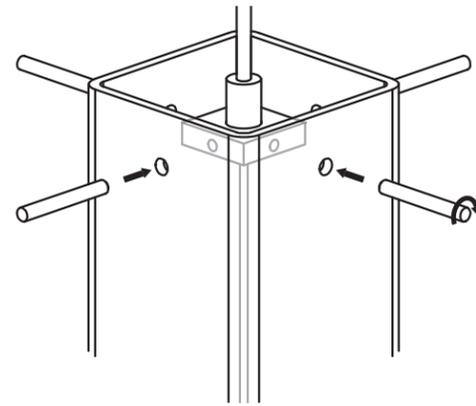


Fig 2.

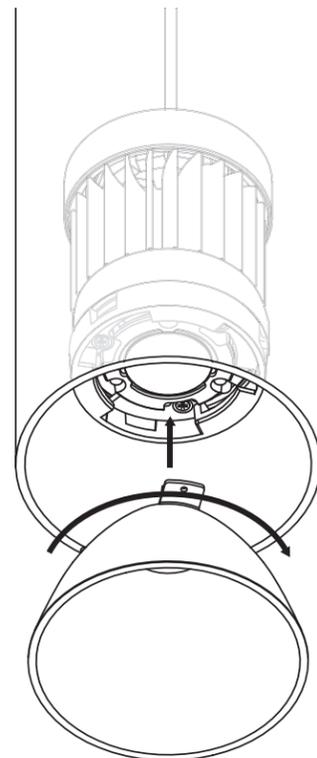

BRUCK LIGHTING SYSTEMS  
15774 Gateway Circle Tustin, CA. 92780  
www.brucklighting.com

For more assistance with technical questions please call our technical support staff at (714) 259-9959. You can also contact us by email at info@brucklighting.com.

# LEDRA® CHROMA PENDANTS



## TECHNICAL SPECIFICATIONS

12V AC/DC input, 50/60 Hz  
700mA DC constant current output  
15VA, 12W for 1(10 watt LED)  
10w 3000K: 400 lm

Suitable for dry location only  
Not compatible with electronic transformers  
Dimmable by power supply, for dimming options contact factory

MINIMUM VOLTAGE REQUIRED TO LIGHT UP ~ 10.5V - 11V

**Compatible with magnetic transformers only**

**DIMMING:** OPERATING DIMMING VOLTAGE ~ 9.2V - 12V  
USE ONLY DIMMING CONTROLS COMPATIBLE WITH LOW VOLTAGE MAGNETIC TRANSFORMERS. WHEN ILLUMINATING, INCREASE DIMMER CONTROL UNTIL FIXTURE TURNS ON.

## IMPORTANT SAFETY INSTRUCTIONS

1. READ AND FOLLOW THESE WARNINGS AND INSTRUCTIONS BEFORE INSTALLING OR MAINTAINING THIS PRODUCT.
2. TURN OFF POWER PRIOR TO ANY WORK ON THE SYSTEM OR PRODUCT.
3. DO NOT INSTALL THIS PRODUCT IN DAMP OR WET LOCATIONS.
4. Do not install damaged product.
5. This product must be installed in accordance with all applicable installation codes and ordinances.
6. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE NEC CODE.
7. Warranty is void in case of unauthorized modifications and/ or improper use.
8. Save these instructions and refer to them when additions to changes or services to the fixture or system are made.
9. CAUTION - Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material.
10. Do not install track or any part which contains exposed wires less than 7 feet from the floor.




**SAVE THESE INSTRUCTIONS**



BRUCK.



# INSTALLATION INSTRUCTIONS

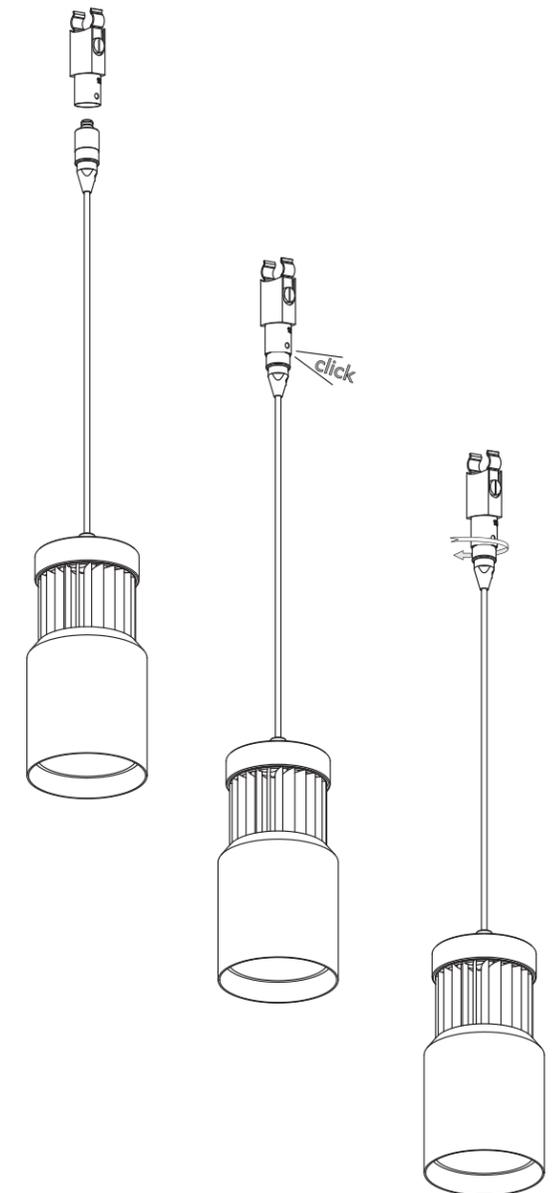

## INSTRUCTIONS FOR USE

- Mount the fixture to the canopy or adaptor by plugging in the Uni-Plug. The Uni-Plug will 'click' when properly inserted. Tighten the retaining collar to complete the installation (see diagram).