

SPECIFICATIONS

PARMA™ SINGLE HANDLE LAVATORY FAUCET

Model

D221558 (Replaces D223158 series)

Description

- · Ceramic disc valve
- 9 $\frac{1}{2}$ " high swivel spout, 5 $\frac{1}{4}$ " spout length, laminar flow
- · With metal touch-down drain assembly
- · Single hole mount
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 20 80 psi

Standards




- NSF 61-9
- Energy Policy Act of 1992



- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372
- CSA B125.1
- Ġ
- ADA Accessibility Guidelines for Buildings and Facilities -4.27.4 Controls and Mechanisms

Warranty


Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.





Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

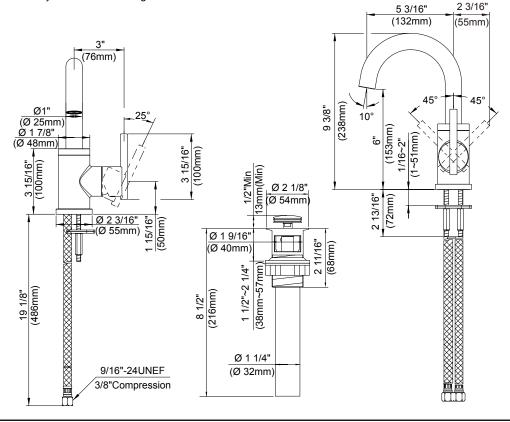

Su	bmittal	Information:

Job Name: ______ Location: _____

Contractor: _____ Contact #:_____