



12V LED HARDSCAPE, DECK, STEP & BENCH

1 LED FIXTURE WITHOUT BRACKET

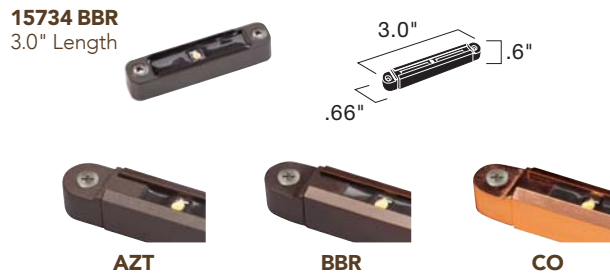

3 LED FIXTURE WITHOUT BRACKET

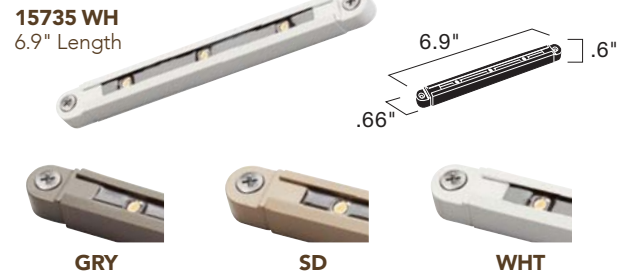

	15734	15735	
Ordering Guide	15734 AZT30 – Textured Architectural Bronze 15734 BBR30 – Bronzed Brass 15734 CO30 – Unfinished Copper 15734 GRY30 – Textured Gray 15734 SD30 – Textured Sand 15734 WHT30 – Textured White	15735 AZT30 – Textured Architectural Bronze 15735 BBR30 – Bronzed Brass 15735 CO30 – Unfinished Copper 15735 GRY30 – Textured Gray 15735 SD30 – Textured Sand 15735 WHT30 – Textured White	
Housing	Cast Aluminum, Cast Brass, Copper Plated Brass	Cast Aluminum, Cast Brass, Copper Plated Brass	
Light Source	1 Integrated High Output Nichia® LED, tightly binned for color uniformity, and constant current driver	3 Integrated High Output Nichia® LEDs, tightly binned for color uniformity, and constant current driver	
Beam Spread	55°	55°	
Color Temp. (CCT) & CRI	3000K (-200/+125) / 80s CRI	3000K (-200/+125) / 80s CRI	
Power Usage at 12V AC Input VA and Watts	0.19 W, 0.28 VA Multiply fixture VA by the number of fixtures used to determine size of transformer	.75 W, 1.3 VA Multiply fixture VA by the number of fixtures used to determine size of transformer	
Operating Voltage Range	9V-15V AC/DC with no loss in output due to constant current technology	9V-15V AC/DC with no loss in output due to constant current technology	
Lumen Maint.	Tested to an L-70 of 40,000 hours	Tested to an L-70 of 40,000 hours	
Delivered Lumens & Efficacy	3000K = 8.6 Lm 3000K = 45 Lm/W	3000K = 44.5 Lm 3000K = 59 Lm/W	
Wiring	70" of usable #18-2, SPT-1-W leads. Pro series wire connectors supplied.	70" of usable #18-2, SPT-1-W leads. Pro series wire connectors supplied.	
Mounting Access.	Stainless steel mounting screws (included)	Stainless steel masonry bracket and mounting screws (included)	
Optional	15716 SS – 1 LED Accessory Bracket	15717 SS – 3 LED Accessory Bracket	
Notes	Subjected to Highly Accelerated Life Testing. 3rd party reliability testing. Not for use with electronic transformers. Copper will naturally patina over time.	Subjected to Highly Accelerated Life Testing. 3rd party reliability testing. Not for use with electronic transformers. Copper will naturally patina over time.	
Fixture Photometric (fc)	Mounting Height	0' 1' 2' 3' 4'	
	Foot Candles at 12"	8.65 1.10 0.07 0.03 0.02	
	Foot Candles at 24"	2.08 0.98 0.30 0.06 0.04	
	Foot Candles at 36"	0.95 0.61 0.30 0.14 0.06	
Mounting Height	0' 1' 2' 3' 4'	Mounting Height	0' 1' 2' 3' 4'
Foot Candles at 12"	43.7 4.89 0.31 0.12 0.07	Foot Candles at 12"	43.7 4.89 0.31 0.12 0.07
Foot Candles at 24"	10.7 4.87 1.29 0.12 0.08	Foot Candles at 24"	10.7 4.87 1.29 0.12 0.08
Foot Candles at 36"	4.96 3.14 1.56 0.67 0.24	Foot Candles at 36"	4.96 3.14 1.56 0.67 0.24



	15716 SS - 1 LED FLAT MOUNT BRACKET	15717 SS - 3 LED FLAT MOUNT BRACKET
Fits	Fits 15734, 15744 (1 LED)	Fits 15735, 15745 (3 LED)
Dimensions	Width – .66", Length – 3.0", Height – .60"	Width – .66", Length – 3.0", Height – .60"
Finish.	Stainless Steel	Stainless Steel
Notes	Mounting hardware included. U.S. Patent Pending	Mounting hardware included. U.S. Patent Pending