
Incandescent

Broadway Lights Open Face

Bath & Vanity

Туре					
	-06	-09	-10	-15	
P3025					
P3026					

		h					
Catalog No.	Pearl Nickel	Brushed Nickel	Polished Brass	Polished Chrome	Lamping	Dimer A	nsions (Inches) B
P3025	-06	-09	-10	-15	4 (m) 60w	24	4-1/2
P3026	-06	-09	-10	-15	6 (m) 60w	36	4-1/2

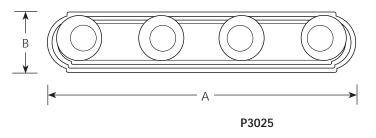

Specifications:

<u>General</u>

- Sculptured round ends
- Steel construction
- Sockets are enclosed with matching cups
- Socket spacing is 6" on centers
- Plated finishes
- Medium based G lamps recommended
- Can be ceiling mounted using 25 watt lamps

Mounting

- Wall mount only
- Full length back plate covers outlet box

<u>Electrical</u>

- Medium based phenolic sockets
- Pre-wired with sockets in place
 Labeling
 - UL-CUL "Damp Location" listed

Progress Lighting Post Office Box 5704 Spartanburg, South Carolina 29304-5704