


Type _____

-10 -13
P3562

Catalog No.	Finish		Lamping	Socket	Dimensions (Inches)	
	Polished Brass	Brushed Steel			A	B
P3562	-10	-13	2-13w Twin CF	GX23	15-1/4	4-5/8

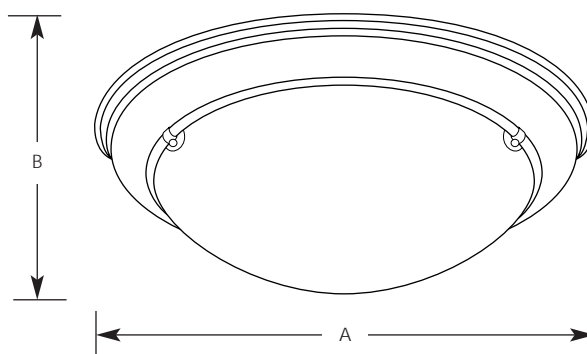

Specifications:

General

- Flush mount design
- Steel construction with Polished Brass (-10) or Brushed Steel (-13) finish
- Satin white glass
- Companion foyer, semi-flush and wall sconce

Mounting

- Ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy mounting
- (3) glass retaining clips

Electrical

- 120V, HPF ballasts
- Pre-wired

Labeling

- UL-CUL listed



Compact Fluorescent

Eclipse Collection
Energy Star


Close-to-Ceiling

Type _____

-10STR -13STR

P3562

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	Brushed Steel		A	B
P3562	-10STR	-13STR	2-13w Quad CFL (4 Pin)	15-1/4	4-5/8

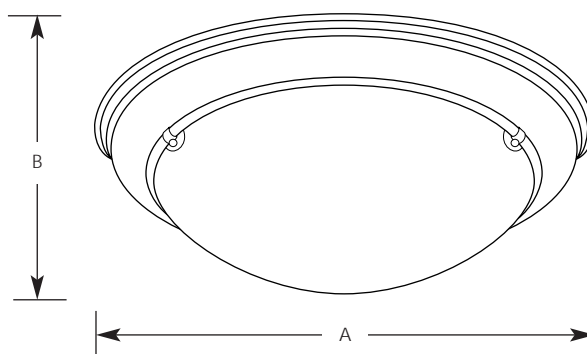

Specifications:

General

- Satin white glass
- Polished Brass (-10) or Brushed Steel (-13) plated finishes
- Units comply with Energy Star requirements
- Steel construction
- Interior of pan is white for maximum light output
- Companion foyer, semi-flush and wall sconce

Mounting

- Ceiling mount
- Fixture housing covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy fixture mounting
- (3) glass retaining clips

Electrical

- Pre-wired
- 120v NPF electronic ballast
- G24q-1 sockets

Labeling

- UL-CUL listed



Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com

Rev. 1/06




Compact Fluorescent

Eclipse Collection
Electronic Ballast

Close-to-Ceiling

Type _____
 -10EB -11EB -13EB
 P3562

Catalog No.	Finish			Lamping	Socket	Dimensions (Inches)	
	Polished Brass	Antique Brass	Brushed Steel			A	B
P3562	-10EB	-11EB	-13EB	2-13w Quad CF (4 pin)	GX24q-1	15-1/4	4-5/8

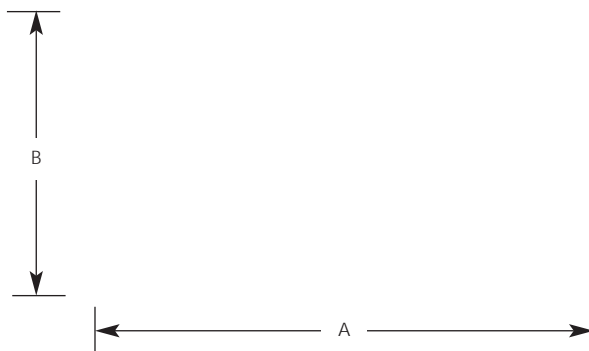

Specifications:

General

- Flush mount design
- Steel construction with Polished Brass (-10), Antique Brass (-11) or Brushed Steel (-13) finish
- Satin white glass
- Companion foyer, semi-flush and wall sconce

Electrical

- 120/277V, HPF electronic ballast
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Ceiling mount
- Covers outlet box
- Mounting strap for outlet box included
- Keyhole slots for easy mounting
- (3) glass retaining clips

Progress Lighting
 Post Office Box 5704
 Spartanburg, South Carolina
 29304-5704

www.progresslighting.com

P3562 ECLIPSE - FLUSH MOUNT



Report No. 97505

No. Lamps: 2 Type Lamp: 13W CF 2-PIN GX23-GE Total Lumens: 1800

Fixture Efficiency: 43.8%


S/MH Ratio: 1.3

Quick Calculator Charts

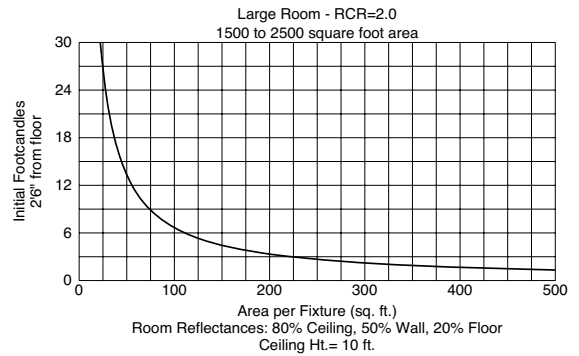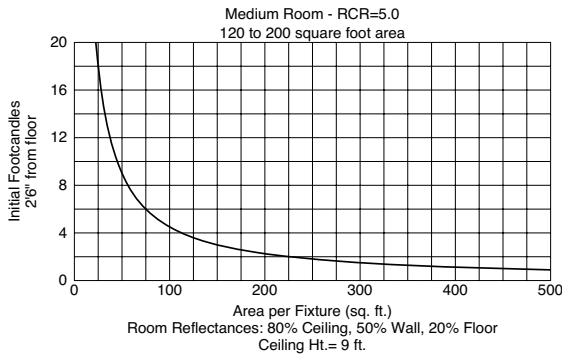

DISTRIBUTION CURVE

INTENSITY DATA

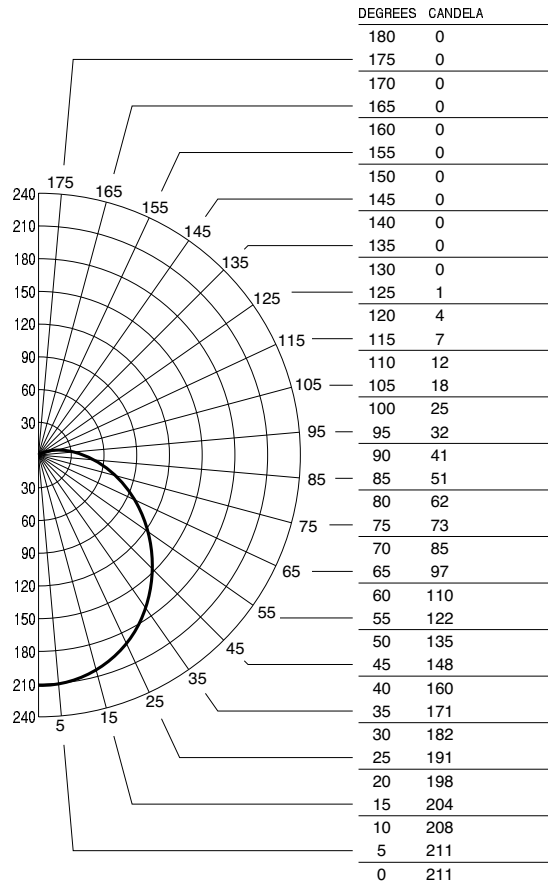

Single Fixture Data

Ceiling Ht. (Ft.)	10% Values		Zero Degrees	50% Values	
	Beam Angle - 112			Beam Angle - 65	
	Ft.-C	Beam Dia.	Ft.-C	Ft.-C	Beam Dia.
8	0.7	16	7.0	3.5	7
10	0.4	22	3.8	1.9	10
12	0.2	28	2.3	1.2	12
14	0.2	34	1.6	0.8	15
16	0.1	40	1.2	0.6	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

Effective Floor Cavity Reflectance 0.20

RC	80												70												50												30												10												0											
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10																																								
0	51	51	51	51	50	50	50	50	47	47	47	44	44	44	42	42	42	40	40	40	37	37	37	35	35	35	32	32	32	31	31	31																																								
1	46	43	41	39	44	42	40	38	39	37	36	37	35	34	35	34	32	31	30	30	28	28	28	26	26	26	25	25	25	25	25																																									
2	41	37	33	31	40	36	33	30	34	31	29	32	29	28	30	28	26	25	25	24	24	24	23	23	23	22	22	22	22	22																																										
3	37	32	28	25	36	31	27	25	29	26	24	28	25	23	26	24	22	21	21	21	21	21	20	20	20	19	19	19	19	19																																										
4	34	28	24	21	33	27	24	21	26	23	20	24	22	19	23	21	19	18	18	18	18	18	17	17	17	16	16	16	16	16																																										
5	31	25	21	18	30	24	21	18	23	20	17	22	19	17	21	18	16	15	15	15	15	15	14	14	14	13	13	13	13	13																																										
6	29	23	18	15	28	22	18	15	21	17	15	20	17	14	19	16	14	13	13	13	13	13	12	12	12	11	11	11	11	11																																										
7	27	20	16	14	26	20	16	13	19	16	13	18	15	13	17	14	12	11	11	11	11	11	10	10	10	9	9	9	9	9																																										
8	25	19	15	12	24	18	14	12	17	14	12	16	13	11	16	13	11	10	10	10	10	10	9	9	9	8	8	8	8	8																																										
9	23	17	13	11	22	17	13	11	16	13	10	15	12	10	14	12	10	9	9	9	9	9	8	8	8	7	7	7	7	7																																										
10	22	16	12	10	21	15	12	10	15	12	9	14	11	9	13	11	9	8	8	8	8	8	7	7	7	6	6	6	6	6																																										