


Type \_\_\_\_\_  
 -60 -68  
 P7124

Catalog No.	Finish		Lamping	Dimensions (Inches)		
	White Ribbed	Clear Prismatic		A	B	C
P7124	-60	-68	1-13w Twin CF (2-pin)	12-1/4	4-1/4	4-1/4

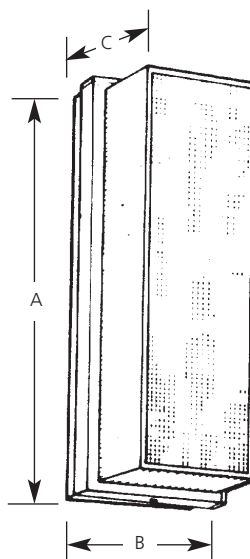

**Specifications:**

General

- White steel back plate
- DR acrylic high impact resistant diffuser
- Diffuser completely covers back plate - flush to ceiling or wall
- Diffuser held in place with stainless steel tamper proof screws

Mounting

- Ceiling or wall mounted
- Covers any outlet box
- Slots in back plate to mount directly to outlet box

Options

- White ribbed diffuser - specify suffix "60"
- Clear prismatic diffuser - specify suffix "68"

Electrical

- GX23 base sockets
- 120V HPF ballast
- 277V available on request
- Minimum start temperature + 32° F

Labeling

- UL-CUL damp location listed