TOTO[®]

MS974224CEFG

Eco Guinevere® One Piece Toilet, Universal Height, 1.28 GPF



MS974224CEFG - Eco Guinevere® Universal Height Toilet with SoftClose® Seat



Double Cyclone® flushing system with maximum cleaning action for a cleaner, more hygienic toilet bowl.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.



UniFit Rough-in: Easy to install 10", 12" and 14" rough-in's available.



Complete with SoftClose® seat, or upgrade to a Washlet®.



Trip Lever: Standard #C Chrome Plated Optional See price book for

[F

additional information

Augusta Decorative Collection

- Elegant one piece toilet design coordinated to match other Guinevere Suite fixtures and fittings
- Double Cyclone[®] Flushing System
- Universal Height for maximum comfort
- SanaGloss[®] ceramic glaze
- Skirted styling with concealed trapway for easy cleaning
- Clean rim design with no holes for easy cleaning
- Large water surface
- Powerful, fast, quiet flush

ADA Compliant one piece toilet. High-efficiency (4.8Lpf/1.28Gpf) Double Cyclone[®] flushing action.

Tank cover, fittings, polished chrome trip lever, Unifit Roughin, and SoftClose® seat included.

MS974224CEFG

Elongated ADA compliant toilet with SoftClose® seat (Available in: #01, #03, #11, #12)

□ MS974224CEF

Same as MS974224CFG, less SanaGloss® ceramic glaze (Available in: #51)

□ SS224

Guinevere SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

TSU03W.10 10" UniFit rough-in: Optional

TSU03W.12 12" UniFit rough-in: Supplied

TSU03W.14 14" UniFit rough-in: Optional

Colors: #01 Cotton Standard Optional #03, #11. #12, #51

MS974224CEFG Eco Guinevere® One Piece Toilet, Universal Height, 1.28 GPF

PERFORMANCE

The TOTO[®] Guinevere[®] Toilet features the Double Cyclone[®] flushing system. Using two powerful nozzles, the Double Cyclone[®] flushing system creates a forceful centrifugal action that cleans the rim and bowl thoroughly with every flush. The rim has no holes, which makes it easier to clean and offers a seamless appearance.

SPECIFICATIONS

Water Use:	1.28 Gpf / 4.8 Lpf
Flush System:	Double Cyclone TM
Min. Water Pressure:	
	8 psi (Static)
Water Surface:	7-7/8" x 9-7/8"
Trap Dia.:	2-1/8"
Rough-in:	12" (Standard) 10", 14"
Trap Seal:	2-3/16"
Warranty:	Five Year Limited Warranty
Material:	Vitreous China

Shipping Weight: MS974224CEFG 120 lbs.

Shipping Dimensions:

MS974224CEFG 32"L x 19-7/8"W x 29"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2, CAN/CSA B45 requirements, and LASPS for rebate program.

Listing / Approvals: C-UPC, City of Los Angeles, State of Massachusetts, and others.


Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe. WaterSense compliant.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from left-hand side.

These dimensions and specifications are subject to change without notice.

TOTO[®]

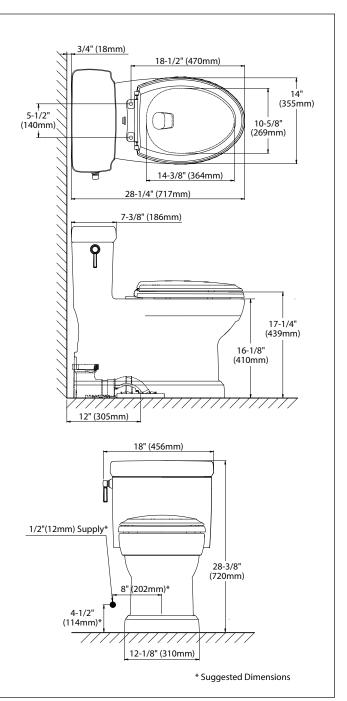



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO LTD. 05/08 #A10530