

INSTRUCTIONS QUICK CONNECT Fixture Model: QF-190

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY

Contact only when power is off due to the lamp gets hot quickly.

Do not touch lens, guard, or enclosure.

Keep away from materials that may burn.

Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.

Do not operate the luminaire with a missing lens or damaged shield.

Save these instructions.

Overview: Fixtures are designed for use with all WAC quick connect adapters. They may also be used on other manufacturers brand of quick connect (consult factory for compatibility).

This fixture may be mounted to Soloail, Monopoints, or standard track, by coupling to a female quick connect adapter.

The fixture is compatible with various metal and glass shade choices (see below).

Installing lamp & shade:



1. Place the lamp inside the shade so the two pins protrude through the back. Insert the lamp into the fixture by aligning the pins with the socket holes, and gently pushing until lamp seats. Use an MR16-G (glass covered) lamp 50 watts maximum (12 or 24 volt depending on power supply).
2. Attach the shade by twisting and pushing in one continuous motion over the spring band.
Note: May be used with 50W Xenon bi-pin lamp.

Installing the quick connect:

1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it seats with the adapter.
3. Adjust fixture position, use caution not to loosen the conical section.

Accessories:

Accepts glass or metal Shades from the G100 series.

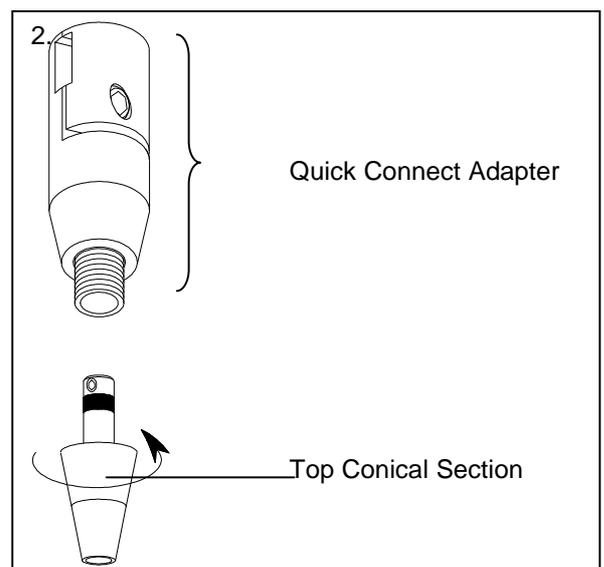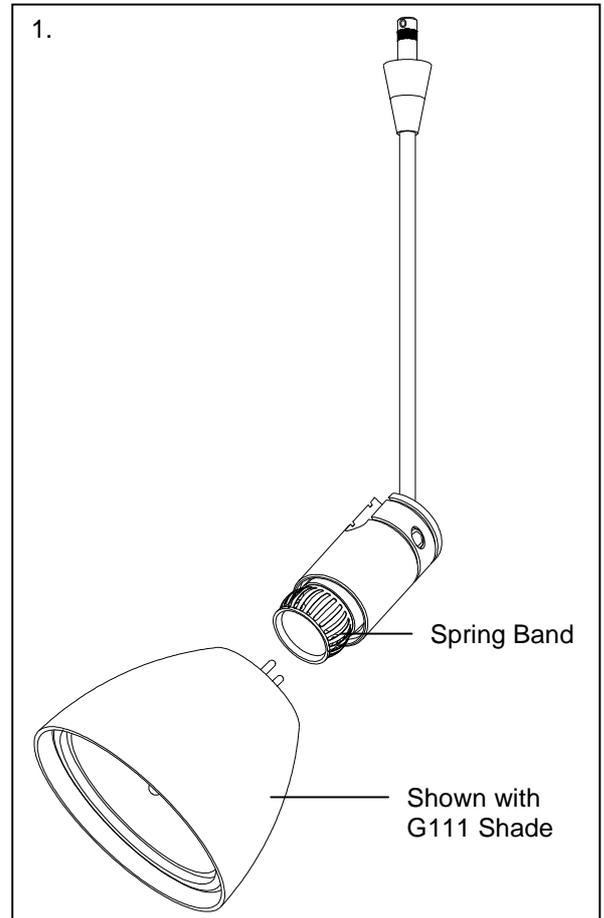

W • A • C | LIGHTING

www.waclighting.com

615 South Street, Garden City, NY 11530
Tel: (516) 515-5000 Fax: (516) 516-5050

168 Brea Canyon Road, City of Industry, CA 91789
Tel: (909) 468-1848 Fax: (909) 468-9958

09//01/06

12/13/02 REV 1