

WF 1061 Premium Plus Vinidor NoFrost



24" Built-In 2 Temperature Zone Wine Cabinet & Freezer

Liebherr's **WF 1061** offers three distinct temperature zones, freezer compartment and two temperature zones in the wine compartment.

Other key features include: 24" cabinet depth, Liebherr's SoftSystem for gently closing doors, and LED lighting in the wine storage. The wine compartment houses 34 bottles, uses wooden shelving on telescopic rails, and offers a unique drop-down presentation shelf.



Left Appliance



Drop down presentation shelf






Icemaker

Capacity	
Total	284 liters / 10.0 cu. ft.
Wine Compartment	34 Bordeaux Bottles
Freezer Compartment	127 liters / 4.5 cu. ft.
Energy Star	Not rated
Climate rating	SN-T 10°C to 43°C(50°F to 110°F)
Power	115v at 60hz 2.5 amps / 300 watt
Shipping Weight	231 lbs. / 105 kg
Wine Compartment	
Refrigerator Door	Left Hand Reversible
Interior light	LED Side
Forced air fan system	Quiet DC fan
Bottle shelf	5 Wooden
Freezer compartment	
Interior light	LED
Bins	5 clear plastic
Shelves	3 Glass
Icemaker	Connected to home water supply
Ice cube production in 24 hr.	1 kg / 2.2 lbs.
Ice cube storage capacity	1.5 kg / 3.3 lbs.
Optional top vent grill available 24" or 48"	
Single install kit required for 24"	
SBS install kit required for 48"	

THIS IS A QUICK REFERENCE GUIDE FOR **WF1061**, FOR COMPLETE INSTRUCTIONS, PLEASE REFER TO THE DESIGN GUIDE OR VISIT <http://www.liebherr-appliances.com>

Unit Dimensions:

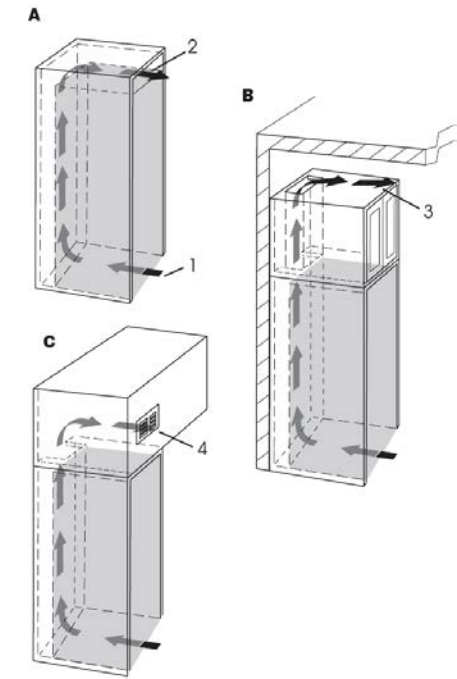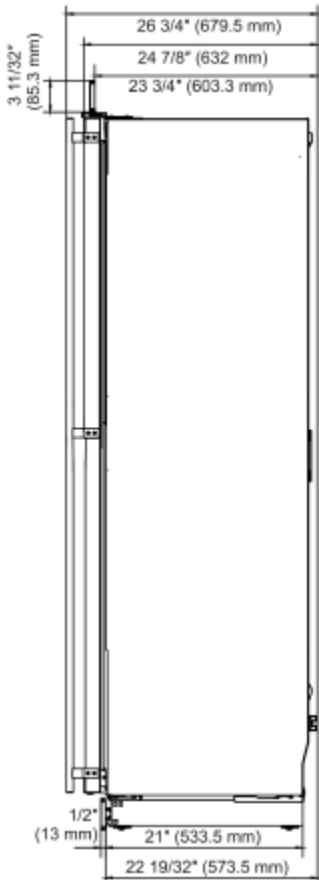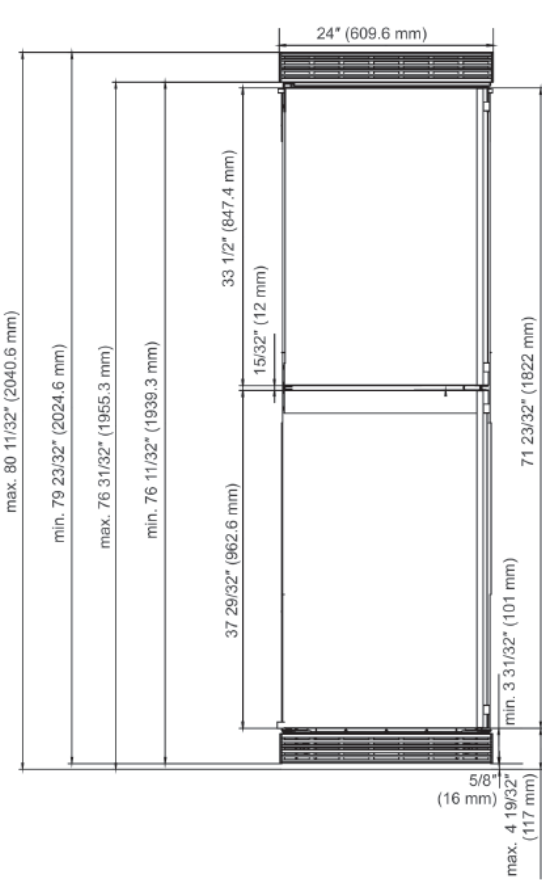

Cabinet Opening Dimensions



„This is a built-in refrigerator-freezer with either custom finished door panels or stainless steel doors. The unit is not intended for freestanding use and has to be installed inside a cabinet. This type of cabinet must be carefully constructed using the proper dimensions and it must provide proper ventilation to ensure proper appliance operation.

Kitchen Cabinet Airflow

1. The following ventilation dimensions must be observed:

There must be a ventilation space at least 31 in.² (200 cm²) at the airflow inlet (1) and at the airflow outlet (2).

The top ventilation space can be directed in one of the following ways:

- A) Directly over the appliance (2) with an optional factory air vent.
- B) Above the cabinet and below the ceiling (3).
- C) Through a vent installed in a soffit (4).

Units are to open at a minimum of 90° to prevent problems removing drawers. With the door opening 90°, you may have to move drawers slightly to clear the door interior.

Use a minimum 2" (51 mm) filler, for corner installations, so the door can be opened to 90°. If you're using raised panels, consider using a wider filler.

Use the supplied filler strip when units are installed side by side.

IMPORTANT

Refer to the minimum door clearances and illustrations at the end of this section for details on door openings and filler size alternatives.

NOTE:

The given cabinet opening height dimension includes top air vent. If you choose to place the vent above the cabinet or in a soffit, you will need to adjust the height dimension accordingly.

