



SPECIFICATIONS
AP SERIES
 RANGE HOODS

Advantage Professional Range Hood Series

• **Hood Dimensions**

Overall bottom projection - 24"
 Available height (less Soffit) - 10" and 18"
 Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Lighting**

2 - PAR16 Medium screw base, 45 watt maximum
 Halogen lamps (not included).

• **Heat Lamps (models P1036W, P1836W)**





2 - 175 watt maximum Type PAR38 heat lamps (not included).

• **Ducting Options**

Vertical or Horizontal ducting through ducting transition (not included) specified for size of motor.

• **Filters**

Dishwasher safe, aluminum mesh grease filters (included).

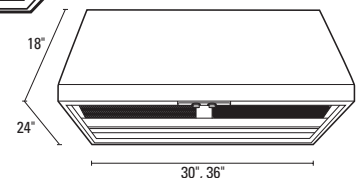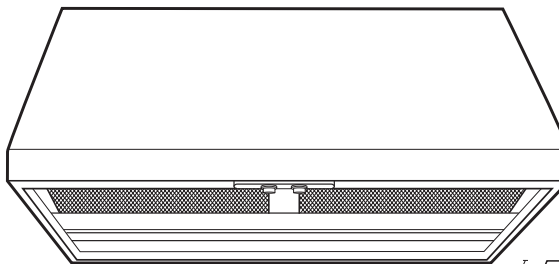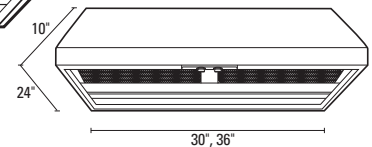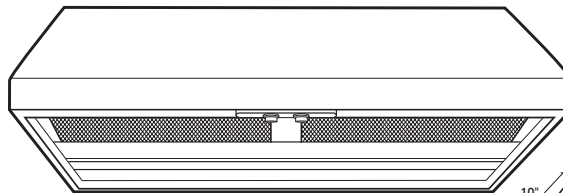

BLOWERS SOLD SEPARATELY

MODEL	HEAT LAMPS ¹	WIDTH	HEIGHT	DEPTH
AP1030	NO	30"	10"	24"
AP1036	NO	36"	10"	24"
AP1836	NO	36"	18"	24"
AP1036W	2-175W	36"	10"	24"
AP1836W	2-175W	36"	18"	24"

¹ Lamps not included

Motor Size	POWER USAGE					
	30"		36"		36" w/Heat Lamps	
	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size	Full Load Amps	Breaker Size
300 CFM	1.7 amps	15 amp	1.7 amps	15 amp	5.9 amps	15 amp
500 CFM	1.9 amps	15 amp	1.9 amps	15 amp	6.1 amps	15 amp
600 CFM	2.1 amps	15 amp	2.1 amps	15 amp	6.3 amps	15 amp
900 CFM	6.5 amps	15 amp	6.5 amps	15 amp	10.7 amps	15 amp
1200 CFM	8.0 amps	15 amp	8.0 amps	15 amp	12.2 amps	20 amp

Breaker Size is listed at the recommended minimum size. Installation must be in accordance with all applicable codes and standards.

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: West Chester, PA 19380
 Phone: (877) 304-3785
 Fax: (610) 696-8048
 Email: sales@airkinglimited.com

Canada: Brampton, Ontario L6T 2J3
 Phone: (905) 456-2033
 Fax: (905) 456-1015
 Email: casales@airkinglimited.com