
American Standard

Style That Works Better

CULINAIRE[™] **TWO-HANDLE TOP-MOUNT BRIDGE KITCHEN FAUCET** WITH BRASS SPOUT

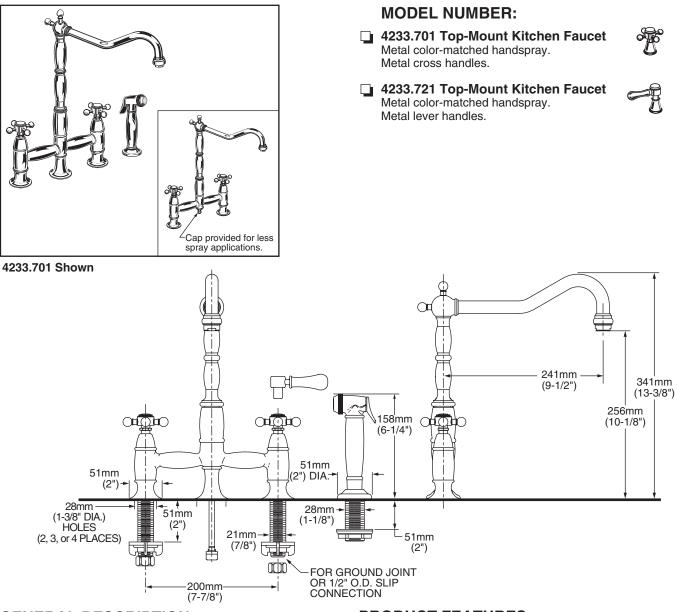

GENERAL DESCRIPTION:

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges - reversible for use with either lever or cross handles. 241mm (9-1/2") Brass swivel spout, brass handles and metal color- matched hand spray. One-half inch male inlet shanks with brass coupling nuts. Pressure compensating aerator with 2.2 gpm/8.3 L/min. maximum flow rate. Decorative cap provided for less spray applications.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Brass Construction and Cast Brass Waterway: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Larger Spout: Increased spout height, reach and diameter.

Lead Free: Faucet contains \leq 0.25% total lead content by weighted average.

Choice of Finishes: Available in a wide range of durable finishes.

SUGGESTED SPECIFICATION:

Two handle top-mount bridge kitchen faucet shall feature brass construction with all brass inlet shanks and coupling nuts. 241mm (9-1/2") Brass swivel spout. Shall also feature 1/4 turn washerless ceramic disc valve cartridges that are reversible for use with cross or lever handles. Faucet shall be American Standard Model # 4233.7




Style That Works Better

CULINAIRE[™] TWO-HANDLE TOP-MOUNT BRIDGE KITCHEN FAUCET WITH BRASS SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 & Annex G



		Finish Options		
Product		Polished Chrome	PVD Blackened Bronze	PVD Satin Nickel
Number	Description	002	068	295
4233.701	Kitchen faucet. Handspray. Metal cross handles.			
4233.721	Kitchen faucet. Handspray. Metal lever handles.			

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

£

£