Push Button Electronic Shower 860T and 861T





Specification: (example)

- Push button electronic shower system
- Hardwire 24 VAC to 6 VDC or Battery 4AA 6 VDC
- Stainless steel cover with S/S vandal resistant mounting screws
- Metal mounting box
- Field adjustable shower time
- Slow closing solenoid valve
- Integral stop
- Tempered water supplied to solenoid valve (except control box options No. 3 and 6)

and... with... (add shower required)

with... (add control/sensor box required)

with... (transformer - specify separately - See Back Page)





860T167

ngineer/Architect Approval		
lodel Specified:		
pproval:	Date:	

DESCRIPTION		PRODUCT NO.			
Hardwire	860TI				
Battery Operated	861TI				
Hardwire with Battery Backup	860TI			-BB	





	SHOWER	SENSOR
✓	<u> </u>	<u> </u>
o	Specify "0" when no shower required.	o
1	1	1
2	2	2
3	Touch-Clean Showerhead, Arm & Flange 2.5 USGPM (9.5 L/min)	Recessed Mount with 8" Box* SEE Specification Drawing #20
4	4	4
5	Handshower, 610mm (24") Combination S/S Slide/Grab Bar 2.5 USGPM (9.5 L/min)	5
6	6 Cast Flow Control Wallmount Showerhead 2.0 USGPM (7.6 L/min)	Components only UNASSEMBLED 4" Box* SEE Specification Drawing #21
7	7	Recessed Mount with 10" Box and Pressure Balance Mixing Valve SEE Specification Drawing #22
8	8	Recessed Mount with 10" Box and Thermostatic Mixing Valve. SEE Specification Drawing #23
9	9	9


* Mixing Valve supplied by others. Refer to www.specselect.com for individual models. Flowrates are at 80 PSI. Note: Use this page front and back, with specification drawing page referenced above, as product submittal sheets.



Approvals:

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC / ANSI A117.1/ADA.
- IAPMO listed
- CSA certified
- Control/Sensor Box Option 7, Pressure Balancing Valve, meets ASSE 1016
- Control/Sensor Box Option 8 Thermostatic Mixing Valve, CSA certified and meets ASSE 1016, 1017, 1070

(Contact Delta Representative for State and/or Local Approvals.)

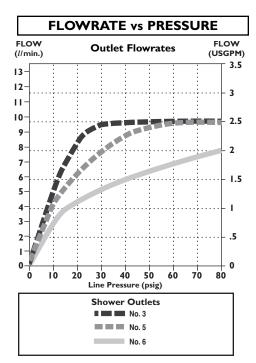


OPERATION:

- Shower flows when push button is activated.
- Adjustable maximum continuous run time 10 minutes.
- Factory set to 3 minutes.

NOTE: For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.



Push Button Electronic Shower 860T and 861T

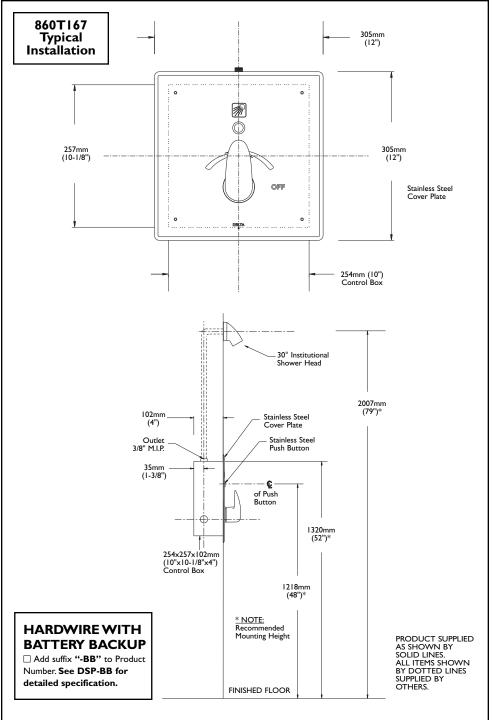

860T & 861T ELECTRONIC SHOWER OPTIONAL ACCESSORIES:

✓	TRANSFORMERS:					
	060704A 110 to 24VAC Class II 20VA (Up to 5 Electronic Valves)					
	060771A 110 to 24VAC Class II 40VA (Up to 10 Electronic Valves)					
	060772A					
✓	CORDS:					
	060901A 12" Solenoid Extension Cord					
	060902A 36" Solenoid Extension Cord					

Refer to www.specselect.com for individual models. Product supplied as shown by solid lines. All items shown by dotted lines supplied by others.

Specification Drawing #20





TEMPERED WATER - ASSEMBLED CONTROL BOX

860T AND 861T SERIES


✓	PRODUCT NO.			VALVE TYPE	MOUNT TYPE	COVER
	860T1		3	Push Button Shower Valve – Hardwire	Recessed Mount	254mm (10") Stainless Steel
	861TI		3	Push Button Shower Valve – Battery	Recessed Mount	254mm (10") Stainless Steel

860T and 86IT SERIES

Battery Operated - Batteries and battery pack supplied.

Hardwire Version comes complete with Watertight Connector and Hardwire Converter 24VAC to 6VDC.

Hardwire with Battery Backup (-BB) comes complete with Watertight Connector, Hardwire Converter 24VAC to 6VDC and 9V battery. See DSP-BB.

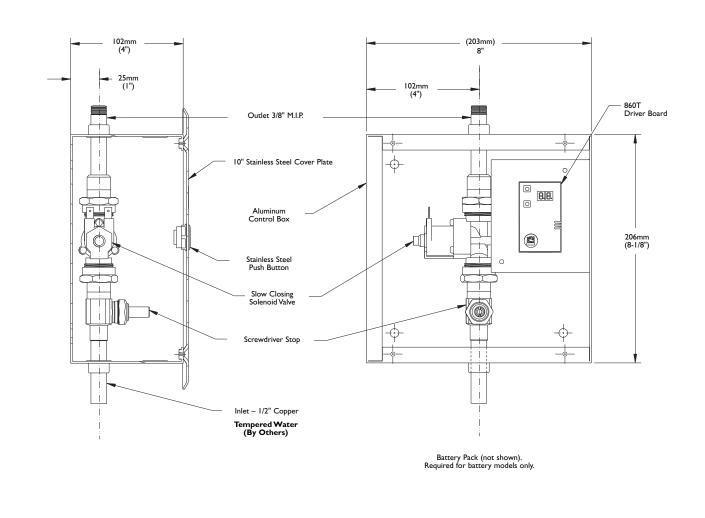





Specification Drawing #21

COMPONENTS ONLY UNASSEMBLED

860T AND 861T SERIES


✓	PRODUCT NO.			VALVE TYPE	MOUNT TYPE	COVER
	860T1		6	Push Button Shower Valve – Hardwire	Recessed Mount	124mm (4-7/8") Stainless Steel
	861TI		6	Push Button Shower Valve – Battery	Recessed Mount	124mm (4-7/8") Stainless Steel


860T AND 861T SERIES

Battery Operated - Batteries and battery pack supplied.

Hardwire Version comes complete with Watertight Connector and Hardwire Converter 24VAC to 6VDC.


Hardwire with Battery Backup (-BB) comes complete with Watertight Connector, Hardwire Converter 24VAC to 6VDC and 9V battery. See DSP-BB.

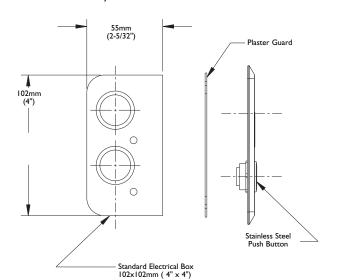

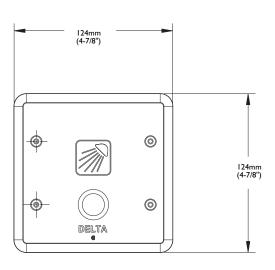

Stainless Steel Cover Plate

Battery Pack (not shown). Required for battery models only.

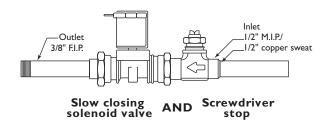

Tempered Water (By Others)





PRESSURE BALANCING MIXING VALVE ASSEMBLED CONTROL BOX

860T AND 861T SERIES


✓	PRODUCT NO.			VALVE TYPE	MOUNT TYPE	COVER
	860T1		7	Push Button Shower Valve – Hardwire	Recessed Mount	305mm (12") Stainless Steel
	861TI		7	Push Button Shower Valve – Battery	Recessed Mount	305mm (12") Stainless Steel

860T AND 861T SERIES

Battery Operated - Batteries and battery pack supplied.

Hardwire Version comes complete with Watertight Connector and Hardwire Converter 24VAC to 6VDC.

Hardwire with Battery Backup (-BB) comes complete with Watertight Connector, Hardwire Converter 24VAC to 6VDC and 9V battery. See DSP-BB.

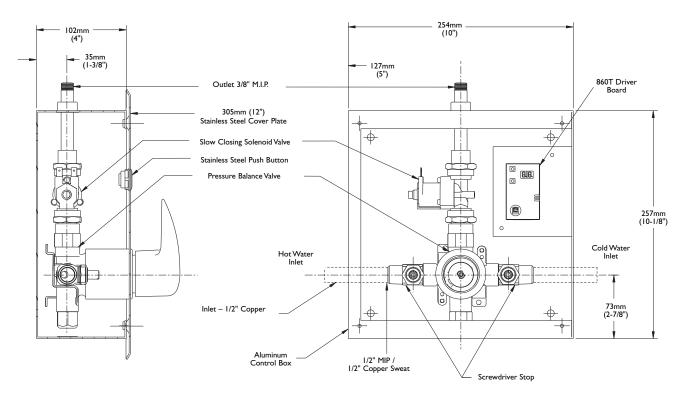

PIPING SHOWN WITH DOTTED LINES SUPPLIED BY OTHERS.

Battery Pack (not shown). Required for battery models only.





Specification Drawing #23

THERMOSTATIC BALANCING MIXING VALVE ASSEMBLED CONTROL BOX

860T AND 861T SERIES

/	PRODUCT NO.			VALVE TYPE	MOUNT TYPE	COVER
	860T1		8	Push Button Shower Valve – Hardwire	Recessed Mount	305mm (12") Stainless Steel
	861TI		8	Push Button Shower Valve – Battery	Recessed Mount	305mm (12") Stainless Steel

860T AND 861T SERIES

Battery Operated - Batteries and battery pack supplied.

Hardwire Version comes complete with Watertight Connector and Hardwire Converter 24VAC to 6VDC.

Hardwire with Battery Backup (-BB) comes complete with Watertight Connector, Hardwire Converter 24VAC to 6VDC and 9V battery. See DSP-BB.

